



- ▶ Long life and high performance
- ▶ Rugged brass design
- ▶ Low cost pressure measuring

The newly designed EPT2200 is based on the EPT2100 but optimised for large production runs and is an ideal pressure transducer for cost sensitive applications.


The monolithic measuring cells used within this design coupled with the high level output circuitry, assures excellent accuracy and long term stability within a light weight design.

The monolithic sensing element is compatible with many medias, including oil and compressed air and is suitable for applications with measuring ranges from 0...6 to 40 bar.



Specifications	
Performance	
Accuracy	< +/-1.0% at RT
Stability (1 Year)	< ± 0.1 %
Overrange pressure	up to 2x rated pressure / max 69bar
Burst pressure	up to 5x rated pressure / max 103bar
Pressure cycles	> 10 million
Environment	
Temperature	-40° to 105°C
Shock	1000 G, 11 msec., 1/2 Sine
Vibration	16 G peak, 20 to 2000 Hz
Sealing	IP 66
Electronics	
Excitation	5 VDC at 0.5 - 4.5 V, 10 - 32 VDC for 4...20 mA output
Current consumption	< 7.5 mA
Short circuit protection	Yes
Reverse voltage protection	Yes
Mechanics	
Housing	Brass
Pressure port	see select table
Electrical connection	see select table
Weight	ca. 25 g

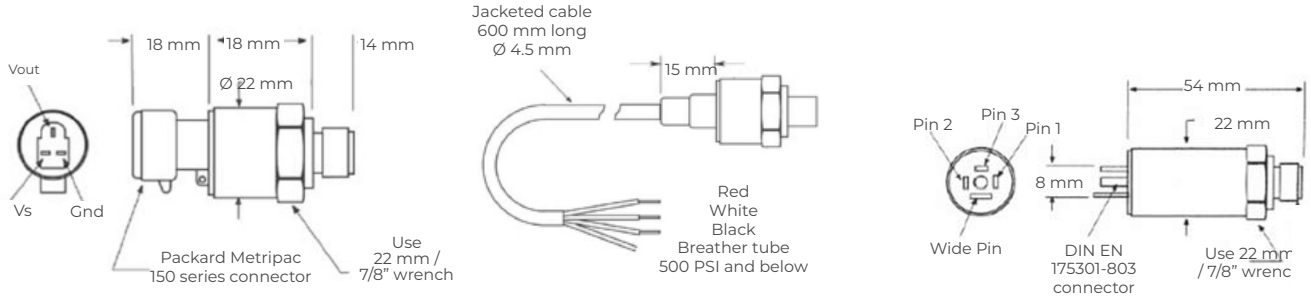

Dimensions



Wiring


Type	Output	PIN A	PIN B	PIN C
 Packard	0.5 - 4,5V	- Supply	+ Supply	Output +
	4..20mA	Current output -	+ Supply	N/A
 DIN EN 175301- 803-C	Output	PIN 1	PIN 2	PIN 3
	0.5 - 4,5V	- Supply	+ Supply	Output +
	4..20mA	Current output -	+ Supply	N/A
Cable	Output	Red	Black	White
	0.5 - 4,5V	+ Supply	- Supply	Output +
	4..20mA	+ Supply	Current output -	N/A



Ordering information

(Please use the characters in the chart below to create your product code)

Sample Code EPT2200 - A - 01000 - B - 5 - A

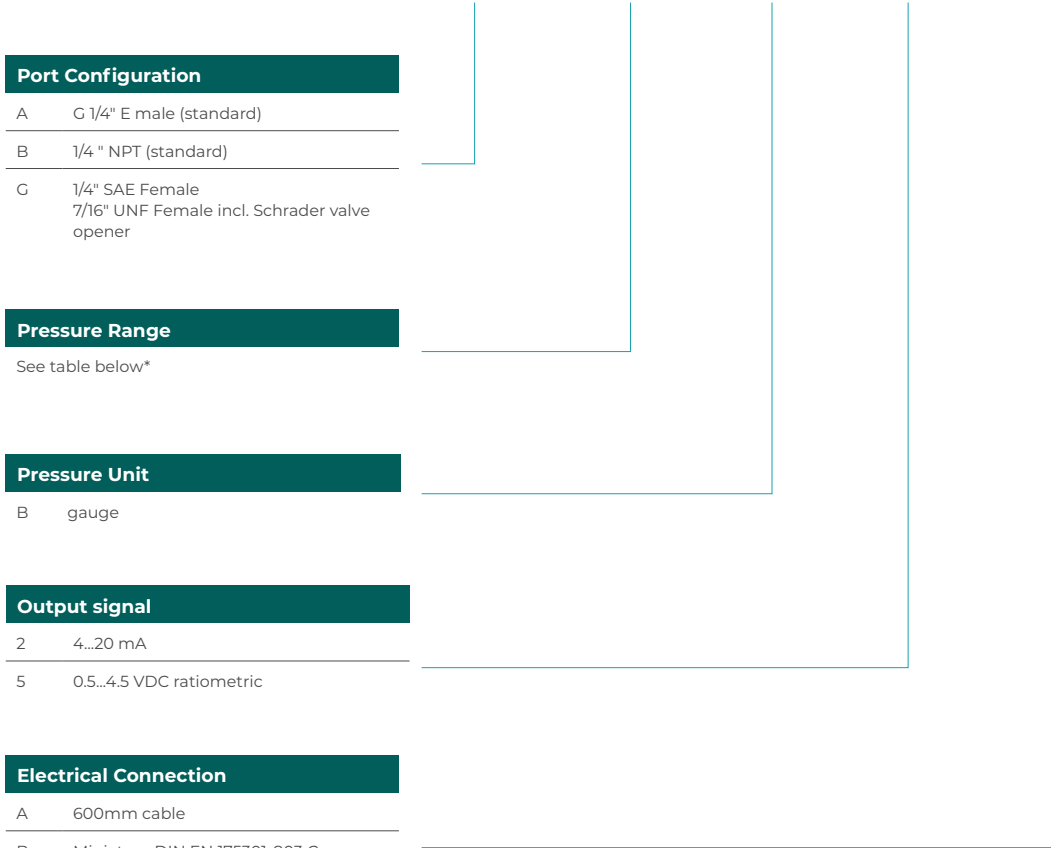

Port Configuration

A	G 1/4" E male (standard)
B	1/4" NPT (standard)
G	1/4" SAE Female 7/16" UNF Female incl. Schrader valve opener

Pressure Range

See table below*

Pressure Unit

B gauge

Output signal

2	4...20 mA
5	0.5...4.5 VDC ratiometric

Electrical Connection

A	600mm cable
B	Miniature DIN EN 175301-803 C connector
C	Packard Metripack connector

* Pressure range						
Bar	6	10	16	25	35	40
Order Code	00600	01000	01600	02500	03500	04000

The following models are typically available from stock:

- EPT2200-A-01000-B-5-C
- EPT2200-C-00100-B-5-C
- EPT2200-C-00200-B-5-C
- EPT2200-C-00700-B-5-C
- EPT2200-C-01000-B-5-C
- EPT2200-C-02500-B-5-C

For non-predefined product codes (stock models) there is an MOQ of 1000 (with a PO of 100 per order)!
The EPT2200 series are backed by a 1 Year Warranty. The purchaser is responsible for compatibility of the media, functional adequacy and correct installation of the transmitter.

If you require a customized solution for your program contact our sales team.