


FEATURES



- Able to be used at wide temperature from -40°C to 85°C
- Long life Endurance : 1,000 hours at +85°C
- REACH,RoHS Directive Compliant

APPLICATIONS

- Memory back-up for Video, Audio, Cameras, CCTV, Printer, Camcorder, Telephones, Car stereo, E-meter, Toy, Computer, Notebook PC, Rice cooker, Home network etc.




PART NUMBER SYSTEM					
CBL	5R5	224	C	F	**
Series	Rated Voltage	Capacitance	Type	RoHS	Special Code

GENERAL SPECIFICATIONS / DIMENSIONS

Item	Performance				
Operating temperature	-40°C to +85°C				
Capacitance range	0.047F to 0.33F				
Capacitance tolerance	- 20% to + 80% (at 25°C)				
Rated voltage	5.5 VDC				
Nominal capacitance & Resistance	Nominal capacitance (F)	0.047	0.1	0.22	0.33
	Nominal resistance (Ω)	40	40	40	40
Temperature characteristics	Capacitance change: Within ±30% of initial measured value at +25°C Internal resistance: -40°C within 7 times of the value of +25°C ; 85°C within 5 times of the value of +25°C				
Endurance (At rated voltage & max. operating temp)	After 1000 hours: Capacitance change: ±30% of initial rated value Internal resistance: Within 4 times of initial specified value				
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.				

Terminal C type

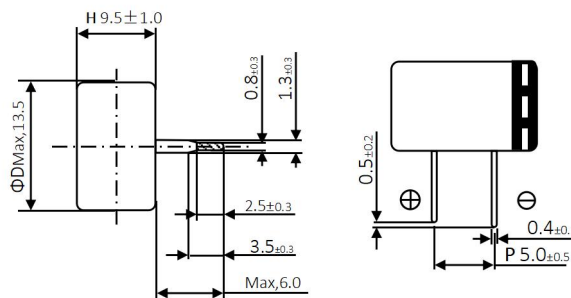

Unit: mm

STANDARD PRODUCTS

Part Number	Working Voltage (V DC)	Rated Cap. (F)	C type(mm)		
			ΦD	H	P
CBL5R5473CF-ZJ	5.5	0.047	13.5	9.5	5.0
CBL5R5104CF-ZJ	5.5	0.10	13.5	9.5	5.0
CBL5R5224CF-ZJ	5.5	0.22	13.5	9.5	5.0
CBL5R5334CF-ZJ	5.5	0.33	13.5	9.5	5.0

Precautions

- Please do not apply external force to the product or the terminal due to stress such as twisting, bending, pushing, knocking down, etc., which may cause the product or terminal to fall off, resulting in an open circuit, short circuit, or liquid leakage.
- Please do not overheat the capacitor with respect to heating in an adhesive curing furnace, etc. For details, see Precautions for Using Electric Double Layer Capacitors.