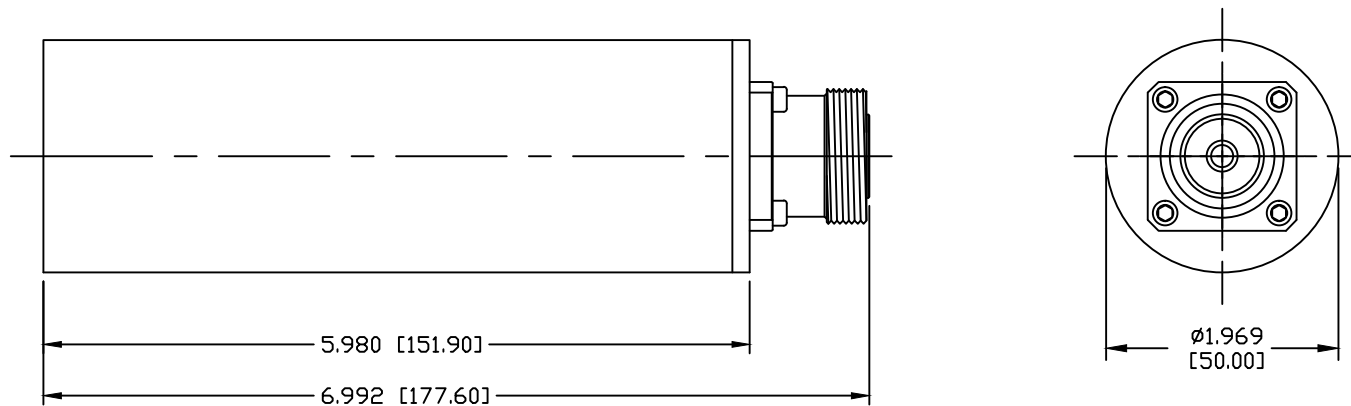


PART NO.

RFLOAD-DF50

REV	DESCRIPTION	DWN	DATE	APPROVED
A	CHANGED BODY STYLE	CZS	12/12/19	JDMc

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 600–2700MHz
 3RD ORDER IM: –160dBc (RELATIVE TO CARRIER)
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS
 VSWR: ≤ 1.25 @ 600–2700MHz
 AVERAGE POWER: 50W
 APPLICATION: INDOOR
 TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim +65^{\circ}\text{C}$
 COLOR: BLACK

NOTES:

CONNECTOR WILL HAVE PROTECTIVE CAP ON

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN C. ZUNIGA	12/12/19
CHECKED	
ORJ DRAWN C. ZUNIGA	05/24/17

RoHS
COMPLIANT

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

50 WATT TERMINATION LOAD
7/16 DIN FEMALE - 600-2700 MHz

SIZE	CABLE GROUP	DWG NO.	REVISION
A	N/A	RFLOAD-DF50	A
SCALE: NTS	ENGINEERING ID: 2000010	SHEET 1 OF 1	