
Your Expert Partner for **Human Machine Interfaces**

Actuator


Distribution by
DigiKey

704.210.0

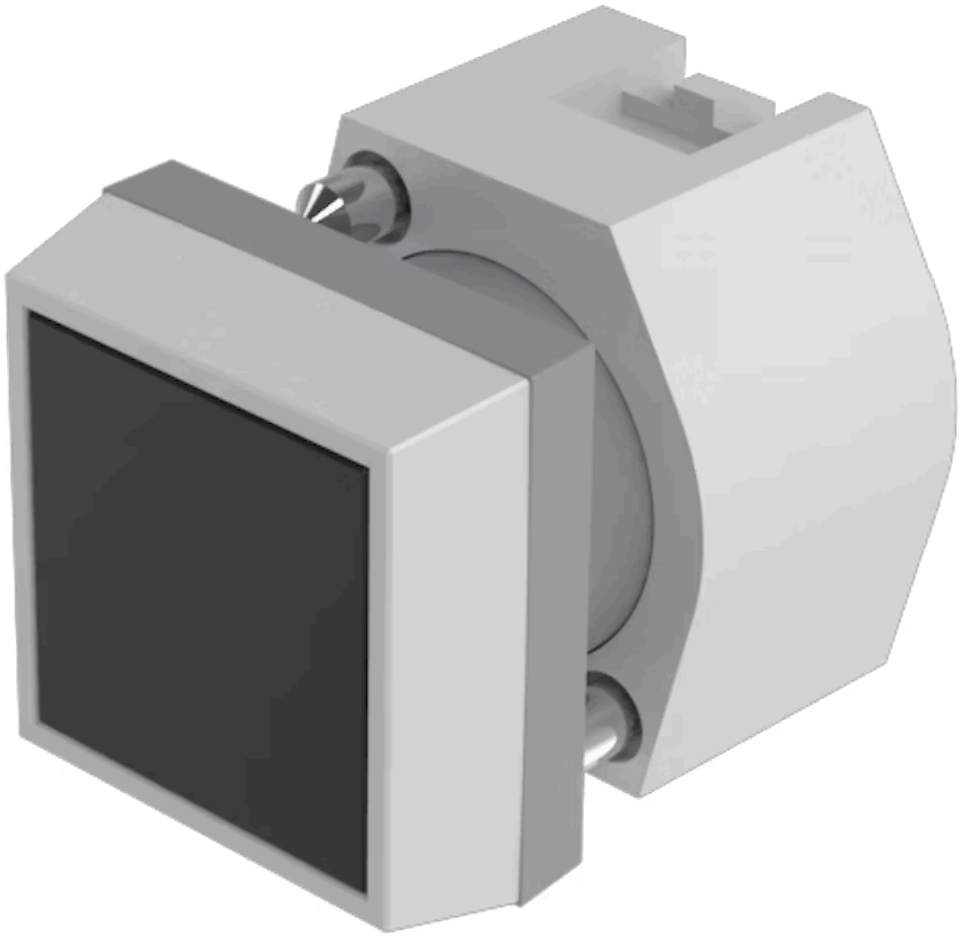

https://digikey.eao.com/p/704.210.0

Your product:



704.210.0
Actuator

Loading . .

FRONT

Front bezel material:	Plastic
Front form:	square
Front bezel colour:	Grey
Front dimension:	30 mm x 30 mm

MOUNTING

Design:	raised

OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens shape:	flush
Lens colour:	Black
Lens material:	Plastic
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the “Standards for low-voltage switching devices” DIN EN 60947-1

MECHANICAL CHARATERISTIC

Switching action:	Momentary
Operating force:	6.2 N
Mechanical lifetime:	≤3 Mio. cycles of operation

Weight:	0.04 kg
Operating Travel:	ca. 5.8 mm ± 0.2 mm


AMBIENT CONDITION

Storage temperature:	– 40 °C ... + 85 °C
Operating temperature:	– 40 °C ... + 55 °C
IP Protection:	IP65 front side


OTHER

max. number of switching elements:	3
Short Description:	Actuator, 30 mm x 30 mm, flush, non illuminative, Black, Plastic, opaque, square, Grey, Plastic, Momentary
Hints:	Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator,Max. 3 switching elements can be clipped on
Housing colour:	Black
Housing material:	Plastic


Wiring diagrams:

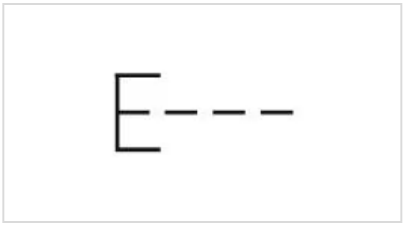

Mounting cut-outs:

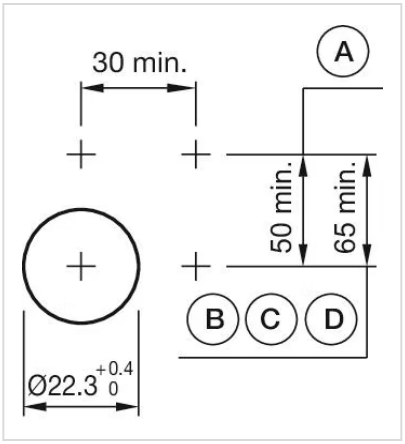

Dimension drawings:

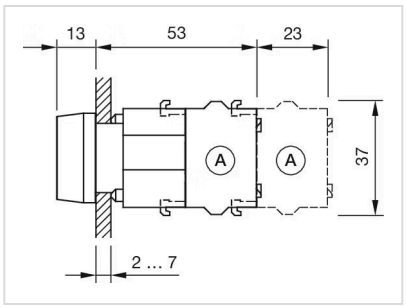
13
53
23
A
A
37
2 ... 7