


Actuator

704.210.7


Distribution by
DigiKey

DigiKey

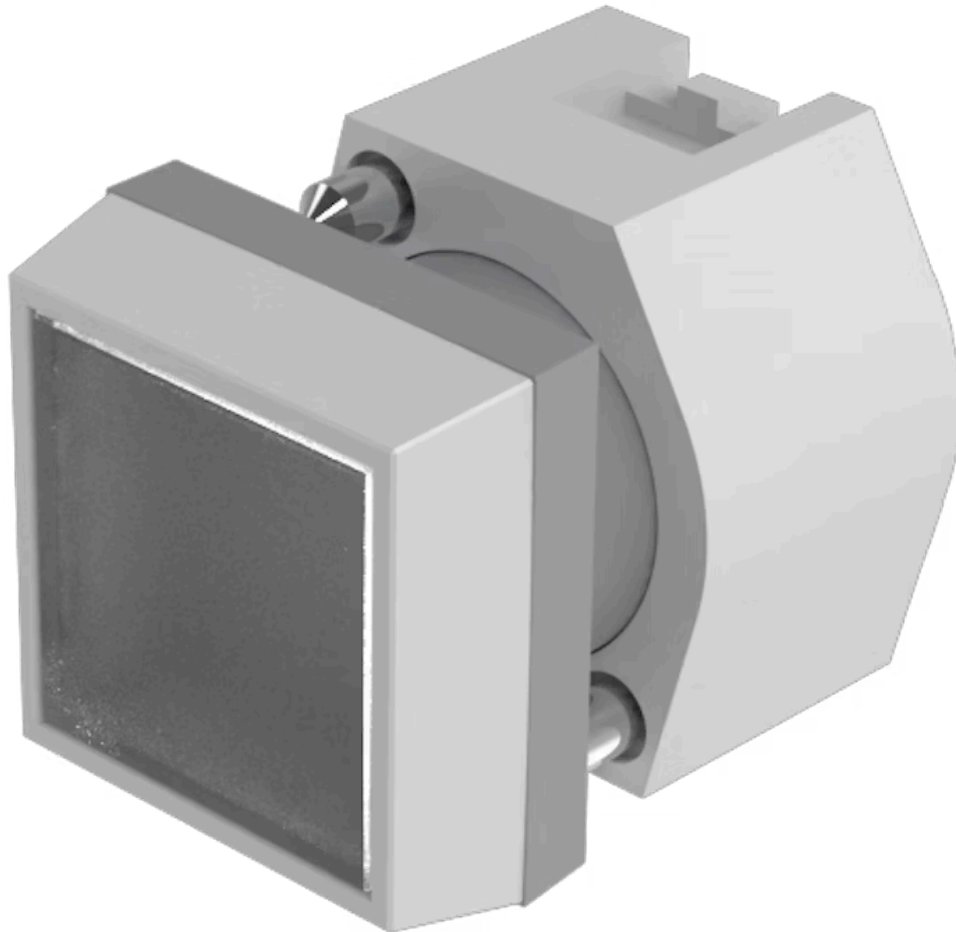

<https://digikey.eao.com/p/704.210.7>

Your product:



704.210.7 Actuator

FRONT

Front bezel colour:	Grey
Front bezel material:	Plastic
Front dimension:	30 mm x 30 mm
Front form:	square

MOUNTING

Design:	raised
----------------	--------

OPERATING-/INDICATION PART

Lens material:	Plastic
Lens shape:	flush
Lens colour:	Colourless
Lens optics:	transparent
Lens illumination:	non illuminative

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

MECHANICAL CHARACTERISTIC

Switching action:	Momentary
Operating force:	6.2 N
Weight:	0.04 kg

Operating Travel: ca. 5.8 mm ± 0.2 mm

Mechanical lifetime: ≤3 Mio. cycles of operation

AMBIENT CONDITION

Storage temperature: - 40 °C ... + 85 °C

IP Protection: IP65 front side

Operating temperature: - 40 °C ... + 55 °C

OTHER

Housing material: Plastic


Housing colour: Black

max. number of switching elements: 3


Hints: Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator, Max. 3 switching elements can be clipped on

Short Description: Actuator, 30 mm x 30 mm, flush, non illuminative, Colourless, Plastic, transparent, square, Grey, Plastic, Momentary

Mounting cut-outs:

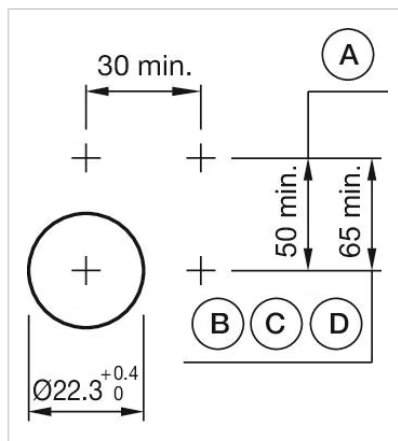

Dimension drawings:

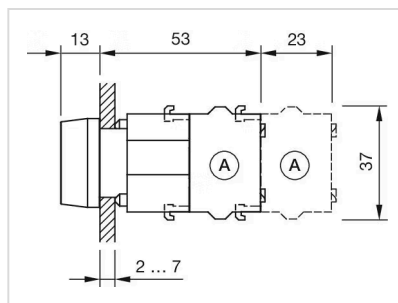

Wiring diagrams:

E---