

Actuator

704.029.2

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.029.2>

Your product:



704.029.2 Actuator

FRONT

Front bezel colour:	Black
Front form:	round
Front dimension:	Ø 29 mm
Front bezel material:	Plastic

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART

Lens shape:	flush
Lens material:	Plastic
Illumination colour:	Red
Lens colour:	Red
Lens optics:	transparent
Lens illumination:	illuminative

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC


Weight:	0.056 kg
Operating force:	8 N

Terminal:	Screw terminal
Mechanical lifetime:	≤3 Mio. cycles of operation
Switching action:	Momentary
Operating Travel:	ca. 5.8 mm ± 0.2 mm


AMBIENT CONDITION

Storage temperature:	– 40 °C ... + 85 °C
IP Protection:	IP65 front side
Operating temperature:	– 40 °C ... + 55 °C

OTHER

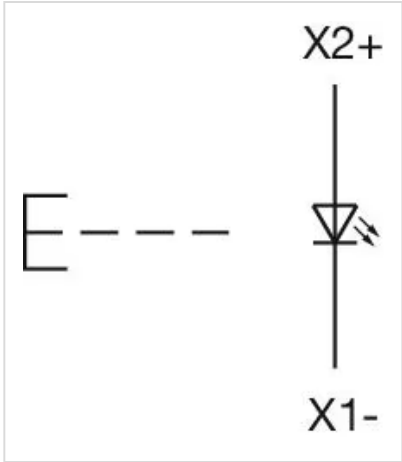Hints:	Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator,Max. 3 switching elements can be clipped on
Short Description:	Actuator, Ø 29 mm, flush, illuminative, Red, Plastic, transparent, round, Black, Plastic, Momentary, Screw terminal, Red
max. number of switching elements:	3
Housing colour:	Grey
Housing material:	Plastic
Wiring diagrams:	

Dimension drawings:

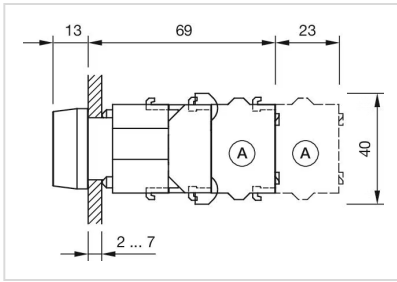

Mounting cut-outs:

