

Actuator

704.029.5

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.029.5>

Your product:



704.029.5 Actuator

FRONT

Front form:	round
Front dimension:	Ø 29 mm
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART

Lens material:	Plastic
Lens colour:	Green
Lens optics:	transparent
Lens illumination:	illuminative
Lens shape:	flush
Illumination colour:	Green

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Mechanical lifetime:	≤3 Mio. cycles of operation
Terminal:	Screw terminal


Weight:	0.056 kg
Operating force:	8 N
Operating Travel:	ca. 5.8 mm ± 0.2 mm
Switching action:	Momentary

AMBIENT CONDITION


Storage temperature:	– 40 °C ... + 85 °C
Operating temperature:	– 40 °C ... + 55 °C
IP Protection:	IP65 front side

OTHER

max. number of switching elements:	3
Housing material:	Plastic
Hints:	Fronting with protective cover to be mounted with a torque of 0.4 Nm onto actuator, Max. 3 switching elements can be clipped on
Housing colour:	Grey
Short Description:	Actuator, Ø 29 mm, flush, illuminative, Green, Plastic, transparent, round, Black, Plastic, Momentary, Screw terminal, Green
Dimension drawings:	

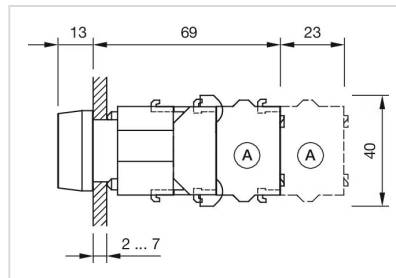

Mounting cut-outs:

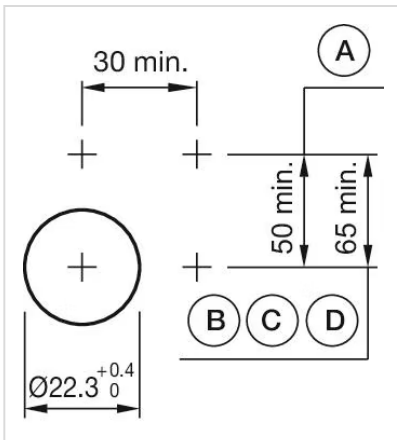

Wiring diagrams:

