


Actuator

704.210.708

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/704.210.708>

Your product:

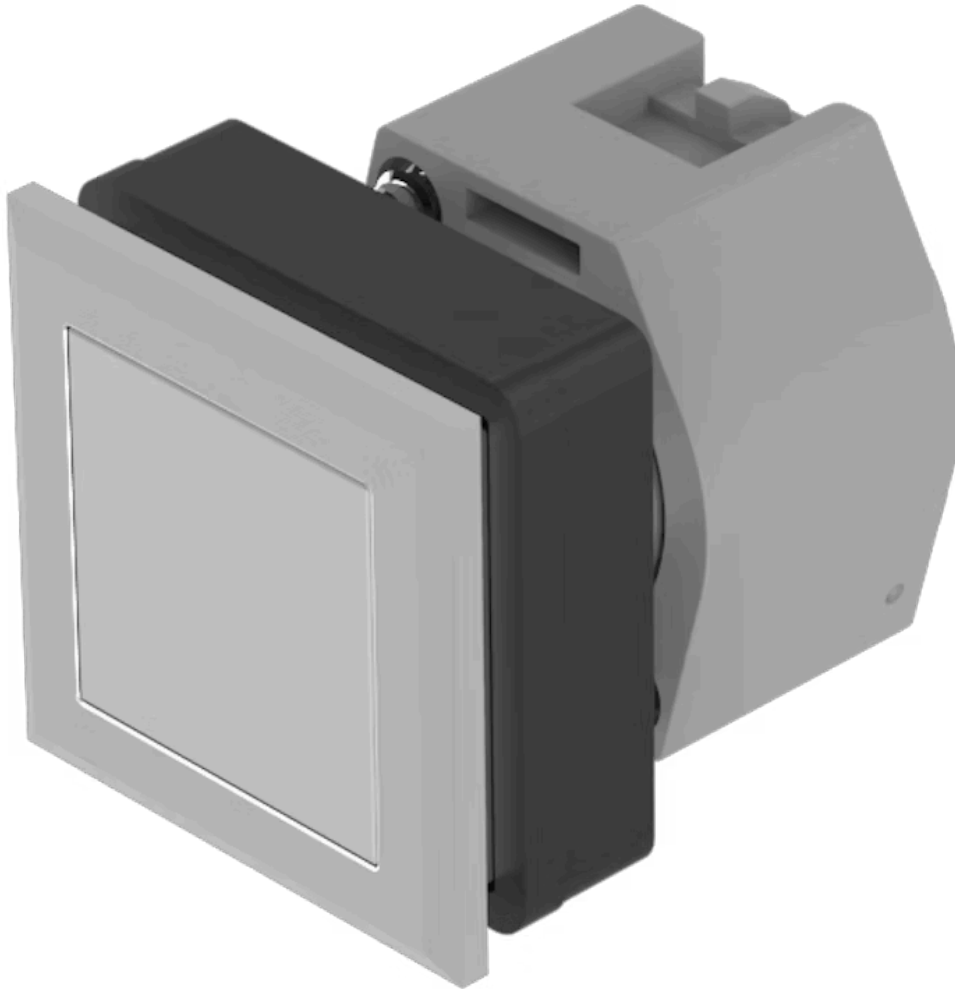

704.210.708 Actuator

FRONT

Front bezel material:	Plastic
Front bezel colour:	Silver
Front dimension:	35 mm x 35 mm
Front form:	square

MOUNTING

Mounting cut-out:	30 mm x 30 mm
Design:	flush

OPERATING-/INDICATION PART

Lens optics:	transparent
Lens illumination:	non illuminative
Lens colour:	Colourless
Lens shape:	flush
Lens material:	Plastic

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Operating Travel:	ca. 5.8 mm $\pm$ 0.2 mm
Mechanical lifetime:	$\leq$ 3 Mio. cycles of operation


Switching action:	Momentary
Operating force:	6.2 N
Weight:	0.051 kg

AMBIENT CONDITION


Operating temperature:	- 40 °C ... + 55 °C
Storage temperature:	- 40 °C ... + 85 °C
IP Protection:	IP65 front side

OTHER

Short Description:	Actuator, 30 mm x 30 mm, 35 mm x 35 mm, flush, non illuminative, Colourless, Plastic, transparent, square, Silver, Plastic, Momentary
Housing colour:	Black
Housing material:	Plastic
max. number of switching elements:	3
Hints:	Max. 3 switching elements can be clipped on
Mounting cut-outs:	

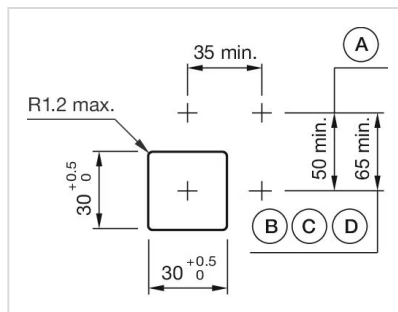

Wiring diagrams:

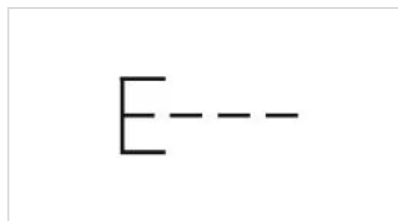

Dimension drawings:

