
Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

704.402.0I

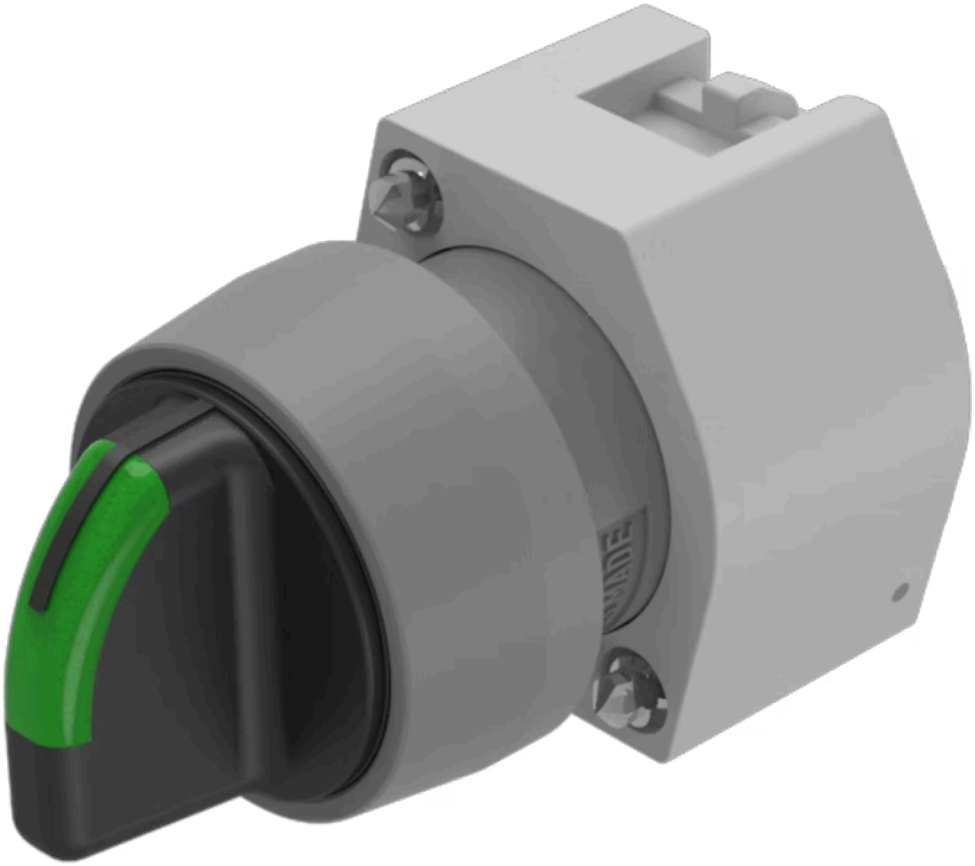

https://digikey.eao.com/p/704.402.0I

Your product:



704.402.0I
Actuator

FRONT

Front bezel colour:	Grey
Front dimension:	Ø 29 mm
Front bezel material:	Plastic

MOUNTING

Design:	raised

OPERATING-/INDICATION PART

Lever shape:	short
Lever colour:	Black
Lever material:	plastic

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the “Standards for low-voltage switching devices” DIN EN 60947-1

MECHANICAL CHARATERISTIC

Mechanical lifetime:	≤2.5 Mio. cycles of operation
Weight:	0.034 kg
Switching positions:	3 positions
Switching action:	Maintained - Rest - Maintained
Switching angle:	42° left / 42° right

AMBIENT CONDITION

Storage temperature: – 40 °C ... + 85 °C

IP Protection: IP65 front side

Operating temperature: – 40 °C ... + 55 °C

OTHER

Hints: Max. 3 switching elements can be clipped on


max. number of switching elements: 3

Short Description: Actuator, Ø 29 mm, optional illuminative, Black, short, Grey, Plastic, Maintained - Rest - Maintained


Wiring diagrams:



Switching positions:

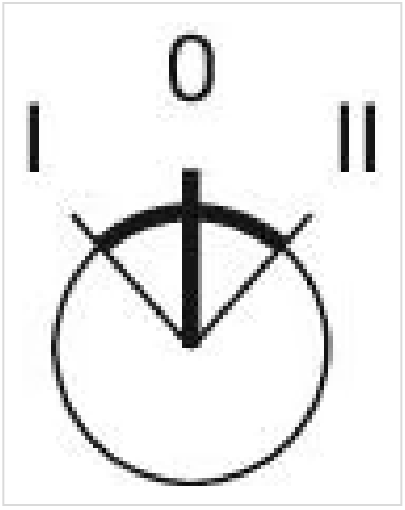

Mounting cut-outs:

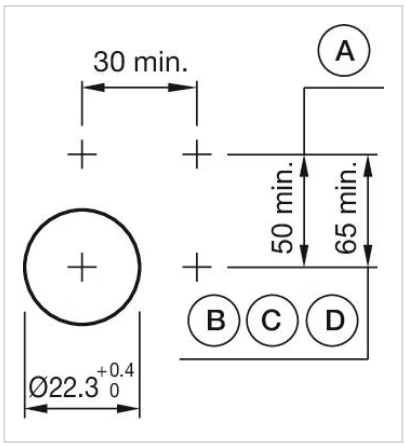

Dimension drawings:

