
Your Expert Partner for **Human Machine Interfaces**

Actuator


Distribution by
DigiKey

704.210.008

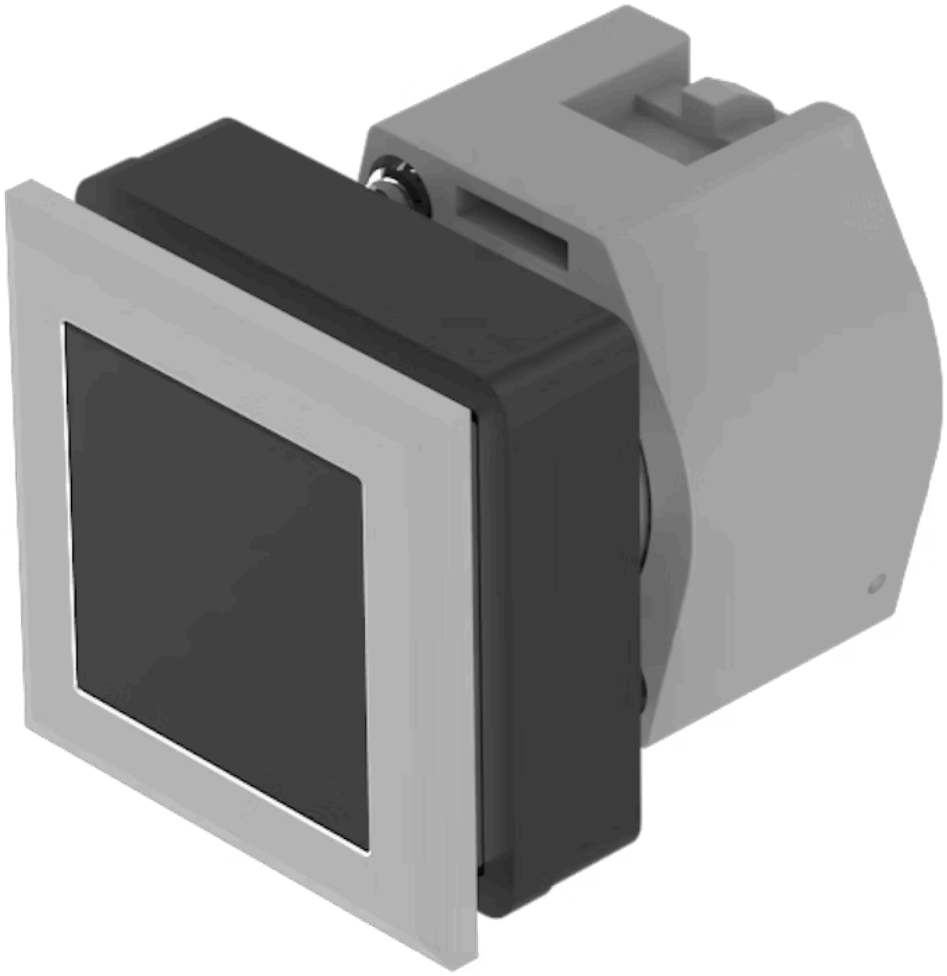

https://digikey.eao.com/p/704.210.008

Your product:



704.210.008
Actuator

FRONT

Front form:	square
Front bezel material:	Plastic
Front dimension:	35 mm x 35 mm
Front bezel colour:	Silver

MOUNTING

Mounting cut-out:	30 mm x 30 mm
Design:	flush

OPERATING-/INDICATION PART

Lens colour:	Black
Lens optics:	opaque
Lens shape:	flush
Lens illumination:	non illuminative
Lens material:	Plastic

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the “Standards for low-voltage switching devices” DIN EN 60947-1

MECHANICAL CHARATERISTIC

Operating Travel:	ca. 5.8 mm ± 0.2 mm
Operating force:	6.2 N

Switching action:	Momentary
Mechanical lifetime:	≤3 Mio. cycles of operation
Weight:	0.051 kg


AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C


OTHER

max. number of switching elements:	3
Housing material:	Plastic
Hints:	Max. 3 switching elements can be clipped on
Housing colour:	Black
Short Description:	Actuator, 30 mm x 30 mm, 35 mm x 35 mm, flush, non illuminative, Black, Plastic, opaque, square, Silver, Plastic, Momentary


Wiring diagrams:

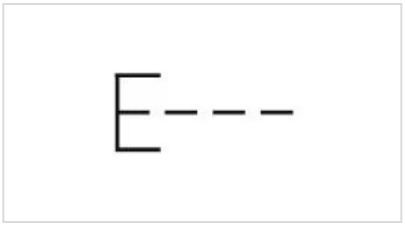

Dimension drawings:

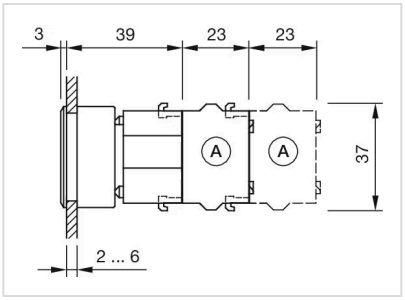

Mounting cut-outs:

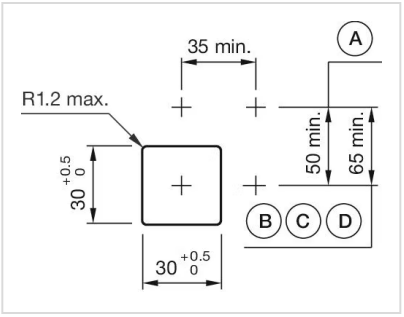
35 min.
A
R1.2 max.
50 min.
65 min.
30 +0.5 0
B
C
D
30 +0.5 0