
Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

704.260.208

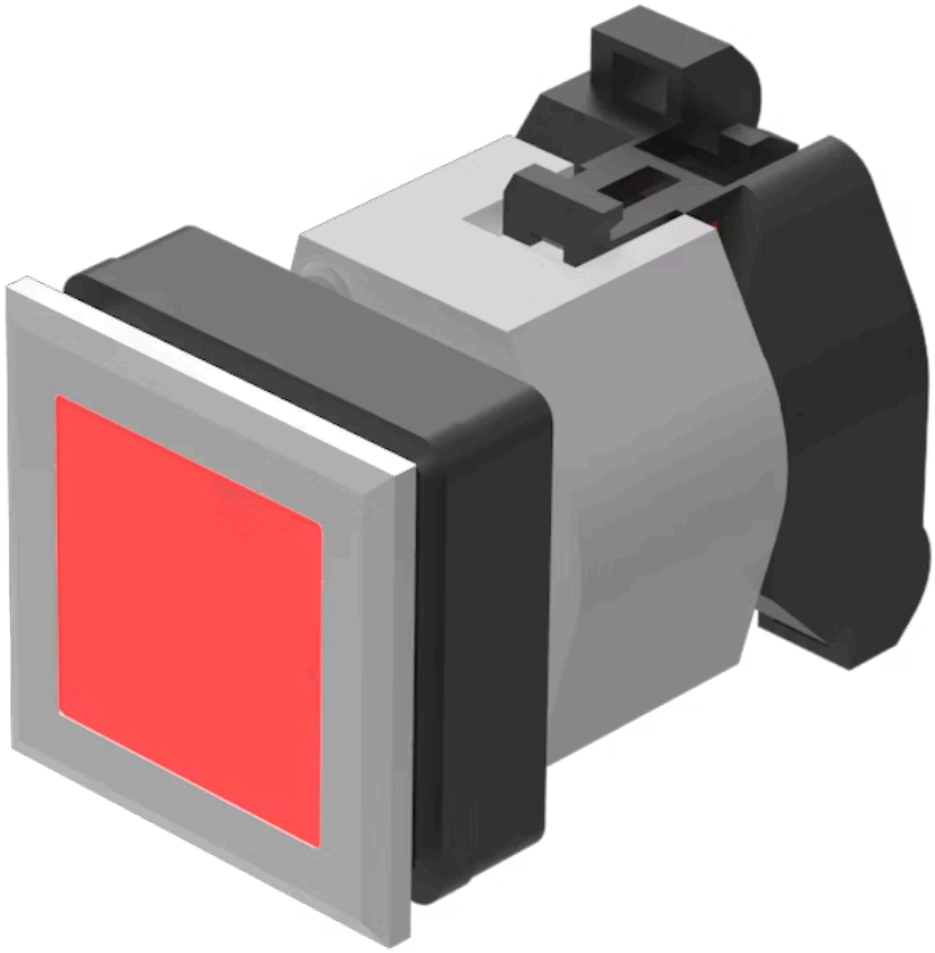

https://digikey.eao.com/p/704.260.208

Your product:



704.260.208
Actuator

FRONT

Front bezel material:	Plastic
Front dimension:	35 mm x 35 mm
Front bezel colour:	Silver
Front form:	square

MOUNTING

Mounting cut-out:	30 mm x 30 mm
Design:	flush

OPERATING-/INDICATION PART

Lens material:	Plastic
Lens shape:	flush
Lens optics:	transparent
Lens illumination:	illuminative
Lens colour:	Red
Illumination colour:	Red

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the “Standards for low-voltage switching devices” DIN EN 60947-1

MECHANICAL CHARATERISTIC

Operating force:	6.2 N

Weight:	0.051 kg
Terminal:	Screw terminal
Operating Travel:	ca. 5.8 mm ± 0.2 mm
Mechanical lifetime:	≤3 Mio. cycles of operation
Switching action:	Maintained


AMBIENT CONDITION

Storage temperature:	– 40 °C ... + 85 °C
Operating temperature:	– 40 °C ... + 55 °C
IP Protection:	IP65 front side


OTHER

max. number of switching elements:	3
Housing colour:	Black
Short Description:	Actuator, 30 mm x 30 mm, 35 mm x 35 mm, flush, illuminative, Red, Plastic, transparent, square, Silver, Plastic, Maintained, Screw terminal, Red
Hints:	Max. 3 switching elements can be clipped on,The lamp block will be delivered with screw terminal
Housing material:	Plastic


Mounting cut-outs:

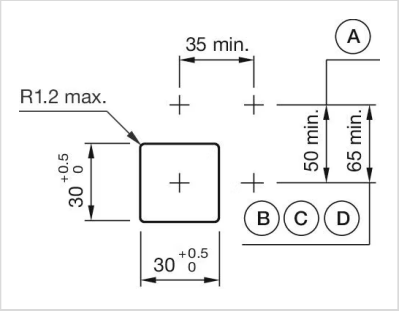

Dimension drawings:

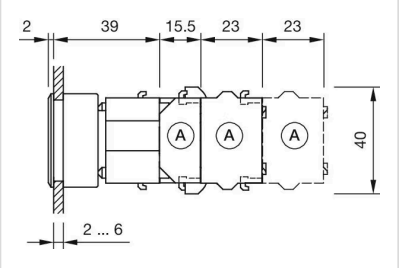

Wiring diagrams:

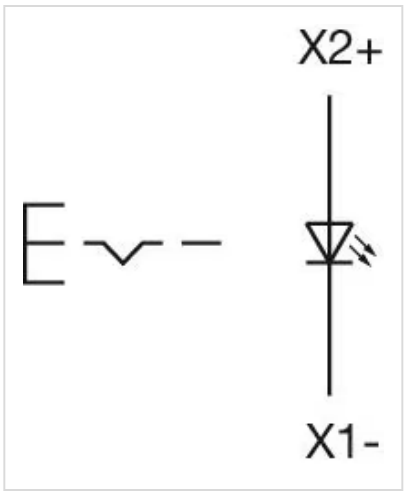
X2+
X1-