

# Actuator

704.413.010I

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/704.413.010I>

Your product:

---



## 704.413.010I Actuator

### FRONT

<b>Front dimension:</b>	Ø 35 mm
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Aluminium

### MOUNTING

<b>Design:</b>	flush
----------------	-------

### OPERATING-/INDICATION PART

<b>Lever material:</b>	plastic
<b>Lever colour:</b>	Black
<b>Lever shape:</b>	short

### ELECTRICAL CHARACTERISTICS

<b>Standards:</b>	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

### MECHANICAL CHARACTERISTIC

<b>Switching angle:</b>	42° right
<b>Weight:</b>	0.056 kg
<b>Mechanical lifetime:</b>	≤2.5 Mio. cycles of operation
<b>Switching positions:</b>	2 positions
<b>Switching action:</b>	Rest - Momentary

## AMBIENT CONDITION

<b>Storage temperature:</b>	- 40 °C ... + 85 °C
<b>IP Protection:</b>	IP65 front side
<b>Operating temperature:</b>	- 40 °C ... + 55 °C


## OTHER

**Short Description:** Actuator, Ø 35 mm, optional illuminative, Black, short, Black, Aluminium, anodised, Rest - Momentary


**max. number of switching elements:** 3

**Hints:** Max. 3 switching elements can be clipped on


**Mounting cut-outs:**

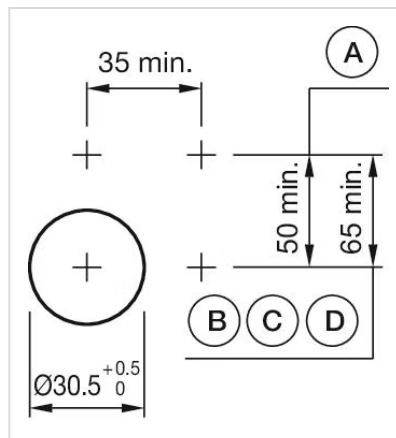

**Dimension drawings:**

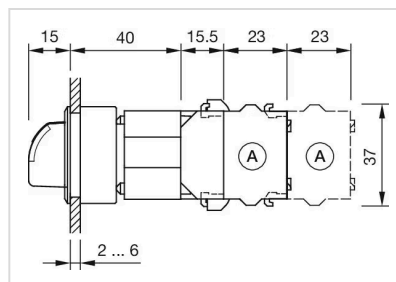

**Switching positions:**

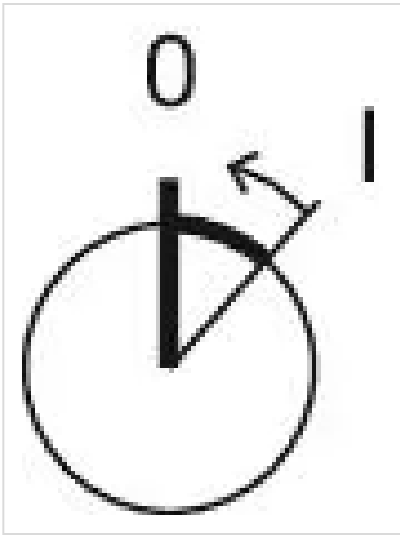

Wiring diagrams:

