

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: FT2

**Conductor**

Conductor count: 4  
 Gauge: 22 AWG 0.34 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.16 mm x 17  
 Resistance at 20 °C: 59.4 Ω /km max

**Insulator**

Material: mPPE  
 Color: red, black, white, green  
 Diameter: Ø 1.3 ±0.10 mm  
 Average thickness: 0.26 mm  
 Minimum thickness: 0.21 mm  
 Resistance at 20 °C: 100 MΩ /km min

**Shield**

Type: foil  
 Material: aluminum mylar  
 Coverage: 100%



**Outer jacket**

Material: mPPE, 85A  
 Color: black  
 Diameter: Ø 4.9 ±0.20 mm  
 Average thickness: 0.83 mm  
 Minimum thickness: 0.58 mm

**Wire marking:** E339579 UL AWM STYLE 21509 22 AWG 105°C  
 600V --- cUL AWM I A 105°C 600V FT2 LF TENSILITY

**Bend radius**

Minimum: 6 times diameter (29.4 mm)

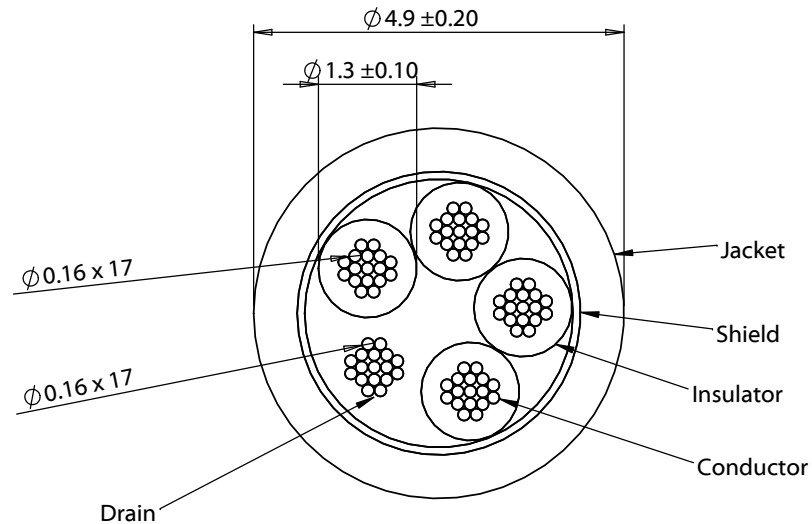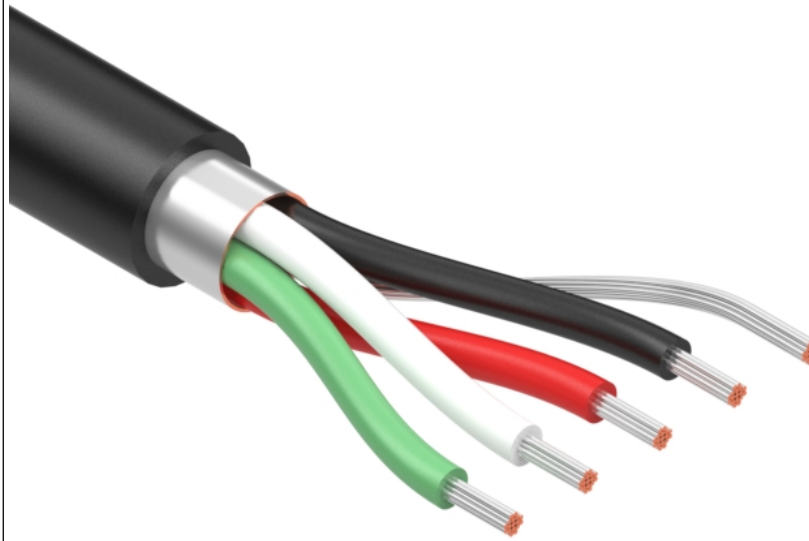

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Phthalate and halogen free	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	10/31/2023	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 4C TS, 22 AWG, 21509, 600V, 105C, 4.9 mm, shielded, FT2, mPPE	Size: Part number: A 30-03367
				Scale: 10:1	

5

4

3

2

1