



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **4.2 mm [ .165 in ]**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Rectangular Power Connector Type  | Header                |
| Connector & Housing Type          | Plug                  |
| Connector System                  | Wire-to-Board         |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                            |          |
|----------------------------|----------|
| Number of Positions        | 4        |
| PCB Mount Orientation      | Vertical |
| Number of Power Positions  | 0        |
| Number of Signal Positions | 4        |
| Number of Rows             | 2        |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 600 VAC |
|-------------------|---------|

Contact Features

|                |                             |
|----------------|-----------------------------|
| Contact Layout | Inline, Matrix, Square Grid |
|----------------|-----------------------------|



|                                                |                 |
|------------------------------------------------|-----------------|
| Contact Mating Area Plating Material           | Tin             |
| Contact Base Material                          | Brass Alloy     |
| Contact Current Rating (Max)                   | 13 A            |
| Contact Retention Within Housing               | With            |
| Contact Type                                   | Pin             |
| PCB Contact Termination Area Plating Material  | Tin             |
| Contact Mating Area Plating Material Thickness | 2.03 μm[80 μin] |

Termination Features

|                                             |                       |
|---------------------------------------------|-----------------------|
| Termination Post & Tail Length              | 3.5 mm[.138 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Mating Alignment Type   | Keyed       |
| Mating Retention        | With        |
| Mating Alignment        | With        |
| PCB Mount Alignment     | Without     |
| PCB Mount Retention     | Without     |
| Mating Retention Type   | Latch       |
| Connector Mounting Type | Board Mount |

Housing Features

|                    |                 |
|--------------------|-----------------|
| Centerline (Pitch) | 4.2 mm[.165 in] |
| Housing Color      | Natural         |
| Housing Material   | Nylon           |

Dimensions

|                                      |                              |
|--------------------------------------|------------------------------|
| Compatible Insulation Diameter (Max) | 2.39 mm                      |
| Connector Height                     | 12.8 mm[.504 in]             |
| PCB Thickness (Recommended)          | 1.6 mm[.063 in]              |
| Product Width                        | 9.75 mm[.384 in]             |
| Product Length                       | 9.6 mm[.378 in]              |
| Compatible Insulation Diameter Range | 1.2 - 3.1 mm[.047 - .122 in] |
| Wire Size                            | .12 - 1.4 mm²                |
| Row-to-Row Spacing                   | 4.2 mm[.165 in]              |

Usage Conditions

|  |  |
|--|--|
|  |  |
|--|--|



|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 - 105 °C[-40 - 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |       |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Identification Marking

|                                |      |
|--------------------------------|------|
| Circuit Identification Feature | With |
|--------------------------------|------|

Industry Standards

|                                             |                               |
|---------------------------------------------|-------------------------------|
| CSA Rating                                  | 208567                        |
| UL Rating                                   | Recognized                    |
| Compatible With Agency/Standards Products   | CSA, UL                       |
| Compatible With Approved Standards Products | UL E28476                     |
| UL Flammability Rating                      | UL 94V-0                      |
| Glow Wire Rating                            | Standard Part - Not Glow Wire |

Packaging Features

|                    |                  |
|--------------------|------------------|
| Packaging Quantity | 600              |
| Packaging Method   | Box & Tray, Tray |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Not Yet Reviewed                                                                                                              |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2024 (240)<br>Candidate List Declared Against: JAN 2019 (197)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not reviewed for solder process capability                                                                                    |

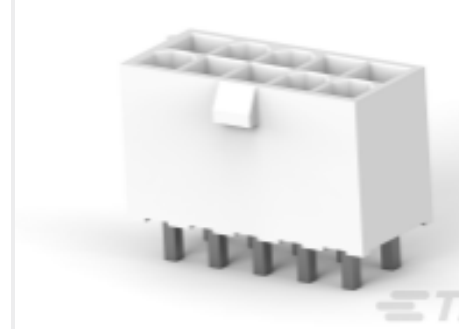
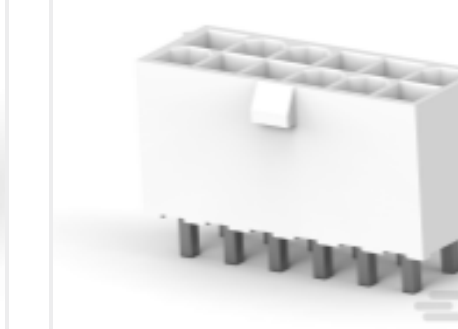
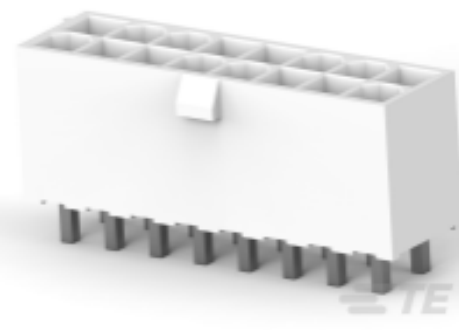
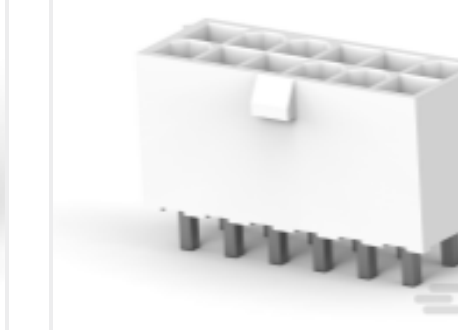
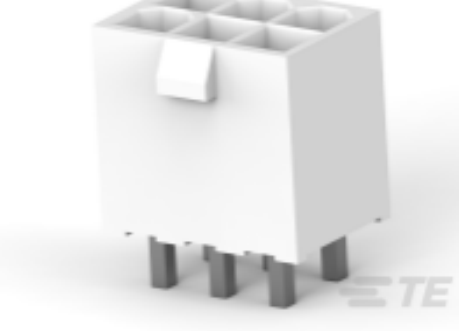
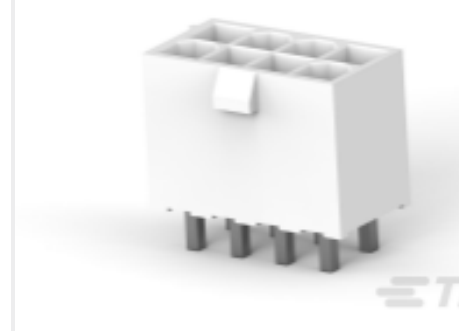
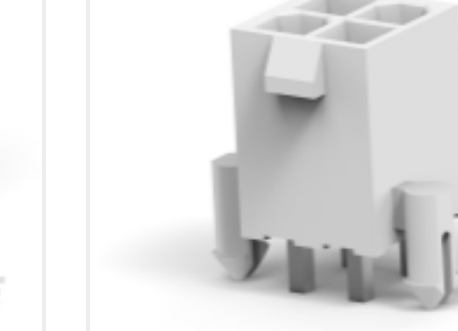
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

|                                                                                                                                                   |                                                                                                                                                   |                                                                                                                                                      |                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 2825260-2<br/>2P VRT HDR VAL-U-LOK HCS V0</p>      |  <p>TE Part # 1-2825260-0<br/>10P VRT HDR VAL-U-LOK HCS V0</p>   |  <p>TE Part # 1-2825260-2<br/>12P VRT HDR VAL-U-LOK HCS V0</p>    |  <p>TE Part # 1-2825260-4<br/>14P VRT HDR VAL-U-LOK HCS V0</p>     |
|  <p>TE Part # 1-2825260-6<br/>16P VRT HDR VAL-U-LOK HCS V0</p> |  <p>TE Part # 1-2825260-8<br/>18P VRT HDR VAL-U-LOK HCS V0</p> |  <p>TE Part # 1-2825272-2<br/>12P VERT HDR VAL-U-LOK HCS GW</p> |  <p>TE Part # 2-2825260-0<br/>20P VRT HDR VAL-U-LOK HCS V0</p>   |
|  <p>TE Part # 2825260-6<br/>6P VRT HDR VAL-U-LOK HCS V0</p>    |  <p>TE Part # 2825260-8<br/>8P VRT HDR VAL-U-LOK HCS V0</p>    |  <p>TE Part # 2825272-4<br/>4P VERT HDR VAL-U-LOK HCS GW</p>    |  <p>TE Part # 2825274-4<br/>4P VAL-U-LOK HCS VRTHDR W/PGS GW</p> |

Customers Also Bought

|                                                                                                                                                     |                                                                                                                                                  |                                                                                                                                                     |                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 325540009-00<br/>MS5540-CM 1BAR WHITE GEL TUBE</p> |  <p>TE Part # 292174-2<br/>CT BOX HDR V SMT 2P O/TAPE NAT</p> |  <p>TE Part # 3-640445-8<br/>08P MTA156 HDR ASSY FL/STR SN</p> |  <p>TE Part # 1-2129458-1<br/>DC Power Jack Conn DIP type 10.7A</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|



Documents

Product Drawings

4P VRT HDR VAL-U-LOK HCS V0

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2825260-4\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2825260-4\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2825260-4\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL

English