

Actuator

51-
456.036F

Distribution by
DigiKey

DigiKey

<https://digikey.eao.com/p/51-456.036F>

Your product:



51-456.036F Actuator

Loading . . .

MOUNTING

Design: flush

OPERATING-/INDICATION PART

Lens illumination: illuminative

ELECTRICAL CHARACTERISTICS

Contacts: 1 NC

Electric strength: 2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15

Switching voltage and switching current: 100 mA at 42 VAC/VDC

MECHANICAL CHARACTERISTIC

Tightening torque: Fixing nut max. 0.5 Nm

Mechanical lifetime: 5 Mio. cycles of operation

Operating force: 1,8 ... 3,5 N

Weight: 0.016 kg

Switching action: Momentary

Switching system: This low-level switching element was designed for switching low powers in electronic circuits. The mechanism assures reliable switching of loads ranging from a few $\mu\text{A}/\mu\text{V}$ up to 100 mA/ 42 VAC/DC. Single-break momentary contact, as normally open or normally closed with 4 independent points of contact. 2 momentary contacts per switching element; combination of normally open and normally closed is possible. Special features are the long life, extremely short rebound time and stable contact resistance.

Contact material: Gold

Operating Travel:

3 mm

Terminal: Universal terminal, 2 x 0.5 mm

Switching system: Low-level element

AMBIENT CONDITION

Operating temperature: – 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely

Storage temperature: – 40 °C ... + 85 °C

Shock resistance: 15 g for 11 ms, as per DIN / EN 60512-4-3, DIN / EN 60068-2-27 (Single impacts, semi-sinusoidal)


IP front protection: IP65, according to DIN EN 60529

OTHER


Short Description: Actuator, illuminative, 1 NC, Momentary, Universal terminal, 2 x 0.5 mm, IP65, according to DIN EN 60529

Housing colour: Black


Component layouts:

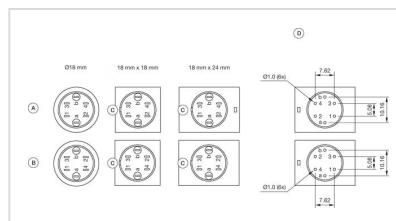

Dimension drawings:

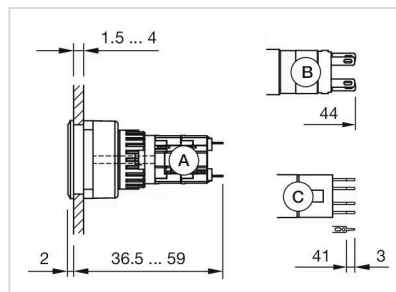

Wiring diagrams:

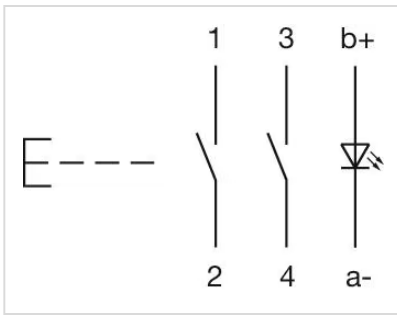

Mounting cut-outs:

