

Round Hooks



Description

Round hooks are general purpose, suitable for any sample with a loop, eyelet or similar feature. Often used with a digital force gauge to perform tensile tests on tension springs.

Applications


Used for general purpose tensile testing of:

- tension springs
- any sample with a loop or eyelet


Specifications

Part No.	Load Capacity	Thread 1	Diameter (ØB)	Max. Specimen Diameter (ØC)	Length (A)	Weight
432-118	50 N / 5 kgf / 11 lbf	10-32 UNF	3 mm 0.12"	8 mm 0.32"	39 mm 1.54"	20 g 0.04 lb
432-171	50 N / 5 kgf / 11 lbf	M6	3 mm 0.12"	8 mm 0.32"	38 mm 1.50"	8 g 0.02 lb
432-120	500 N / 50 kgf / 110 lbf	10-32 UNF	6 mm 0.24"	14 mm 0.55"	66 mm 2.60"	30 g 0.07 lb
432-169	500 N / 50 kgf / 110 lbf	M6	6 mm 0.24"	14 mm 0.55"	66 mm 2.60"	20 g 0.04 lb
432-122	2.5 kN / 250 kgf / 550 lbf	5-16 UNC	6 mm 0.24"	14 mm 0.55"	66 mm 2.60"	30 g 0.07 lb

Dimensions mm (inch)

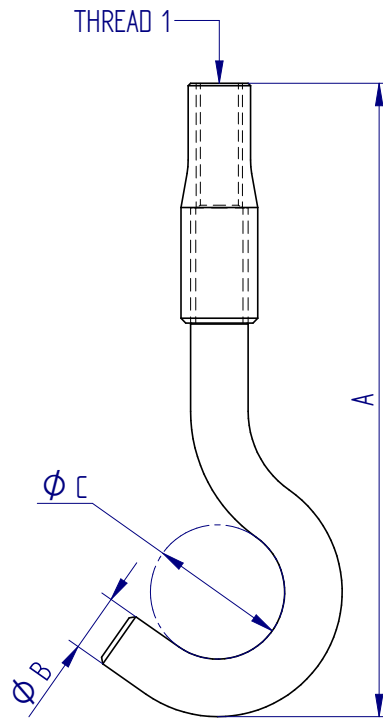

FS 58553
BS EN ISO 9001:2015

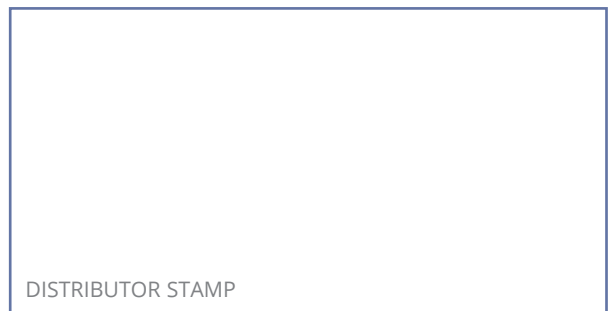

Mecmesin reserves the right to alter equipment specifications without prior notice.
E&OE

Head Office
Mecmesin Limited

w: www.mecmesin.com
e: sales@mecmesin.com

France
Mecmesin France

w: www.mecmesin.com/fr
e: contact@mecmesin.fr

Germany
Mecmesin GmbH

w: www.mecmesin.com/de
e: info@mecmesin.de

North America
Mecmesin Corporation

w: www.mecmesin.com/us
e: info@mecmesincorp.com

Asia
Mecmesin Asia Co., Ltd

w: www.mecmesin.com/th
e: sales@mecmesinasia.com

China
Mecmesin (Shanghai) Pte Ltd

w: www.mecmesin.com/zh
e: sales@mecmesin.cn