



DIMENSIONS:	
A	2.500" ± 0.063
B	2.685" ± 0.125
C	3.060" ± 0.063
D	2.000" ± 0.063
E	1.688" ± 0.063
G	0.203" x 0.375" ± 0.015

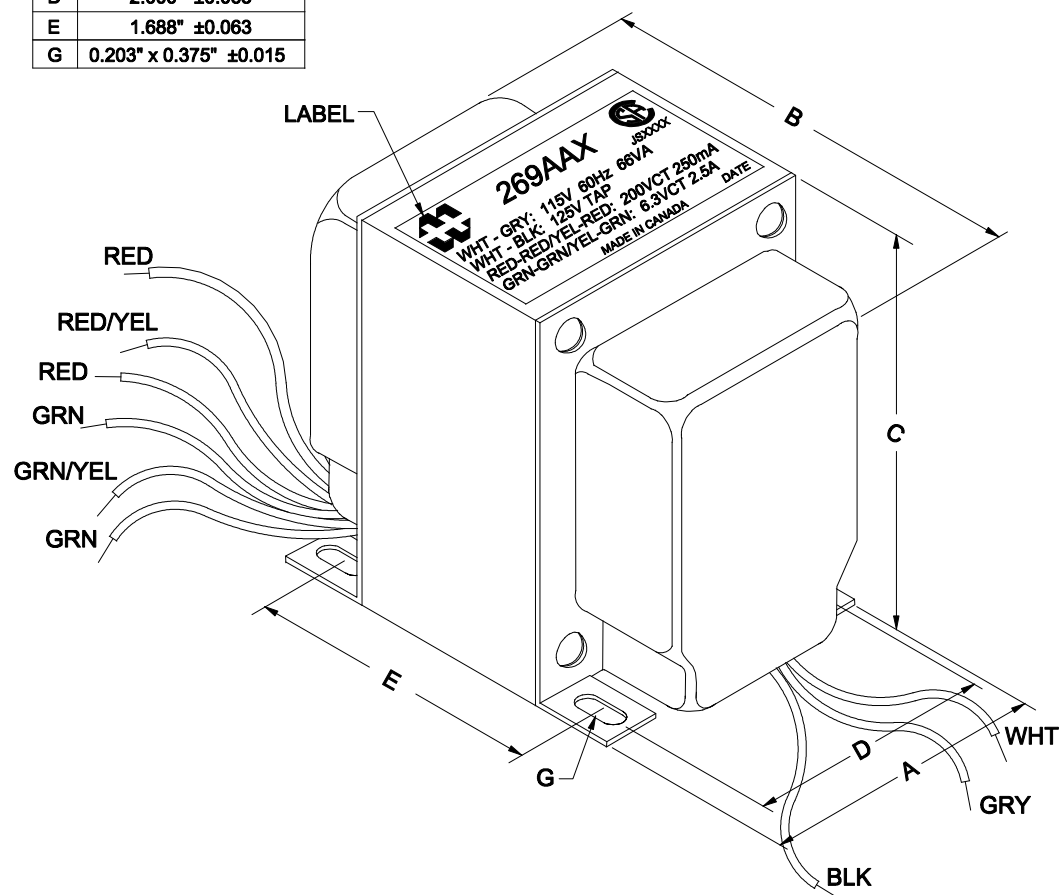

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

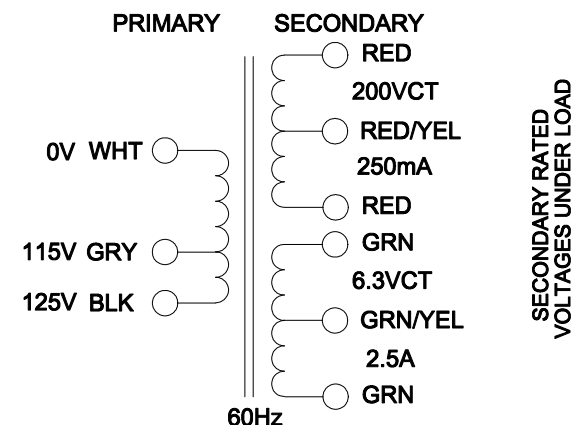

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 125V, 60Hz, WHT - BLK	186mA Max.
Sec. N.L.V	@ 125V, 60Hz, WHT - BLK	
	RED - RED =	213.3V $\pm 2\%$
	RED - RED/YEL = RED/YEL - RED =	106.7V $\pm 2\%$
	GRN - GRN =	6.757V $\pm 2\%$
	RED - RED/YEL = RED/YEL - RED =	3.378V $\pm 2\%$
DCR	@ 20°C, WHT - GRY =	5.557 Ω $\pm 20\%$
	@ 20°C, WHT - BLK =	6.134 Ω $\pm 20\%$
	@ 20°C, RED - RED =	24.90 Ω $\pm 20\%$
	@ 20°C, GRN - GRN =	0.095 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED. C.I.	12/08/20	MANUFACTURING 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 269AAX
			DATE: 12/08/20	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540