

KISSLING | KISSLING Series 29

TE Internal #: K1021410 Power Relays, Standard, Monostable, DC, 10 mW Coil Power Rating DC, 62 Ω Coil Resistance, Coil Suppression Diode, KISSLING Series 29

View on TE.com >

Relays & Contactors > Relays > Power Relays > Power Relay, 200A, Standard, Monostable, DC



Relay Type: Standard

Coil Magnetic System: Monostable, DC

Coil Power Rating DC: 10 mW

Coil Resistance: 62Ω

Coil Special Features: Coil Suppression Diode

All Power Relay, 200A, Standard, Monostable, DC (22)

Features

Product Type Features

Relay Type

enter tivity

Standard

Configuration Features

Coil Special Features	Coil Suppression Diode	
Contact Arrangement	1 Form X (SPST-NO-DM)	
Contact Number of Poles	1	
Electrical Characteristics		
Coil Power Rating DC	10 mW	
Coil Resistance	62 Ω	
Coil Voltage Rating	18 VDC, 32 VDC	
Contact Current Rating	200 A	
Contact Voltage Rating	28 VDC	
Contact Features		
Contact Material	AgSnO2	
Termination Features		
Relay Connection Type	Terminals	

29-211-12

Power Relays, Standard, Monostable, DC, 10 mW Coil Power Rating DC, 62 Ω Coil Resistance, Coil Suppression Diode, KISSLING Series 29



Terminal Configuration	Screw Terminals
Mechanical Attachment	
Product Mounting Feature Type	Mounting Brackets
Product Mount Type	Chassis
Dimensions	
Product Width	62 mm[2.44 in]
Product Length	101 mm[3.97 in]
Product Height	55.5 mm[2.18 in]
Operation/Application	
Coil Magnetic System	Monostable, DC
Other	
Contact Current Class	200 A
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions

	China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
	EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (92.5% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
	Halogen Content	Not Yet Reviewed for halogen content
	Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

29-211-12

Power Relays, Standard, Monostable, DC, 10 mW Coil Power Rating DC, 62 Ω Coil Resistance, Coil Suppression Diode, KISSLING Series 29



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-AL6-KSPR29200 Power Relay, 200A, Standard, Monostable, DC




TE Part # CAT-AL6-KSPR30200 Power Relay, 200A, Standard, Bistable, 2 Coils, Polarized

Also in the Series | KISSLING Series 29



Power Relays(122)

Customers Also Bought

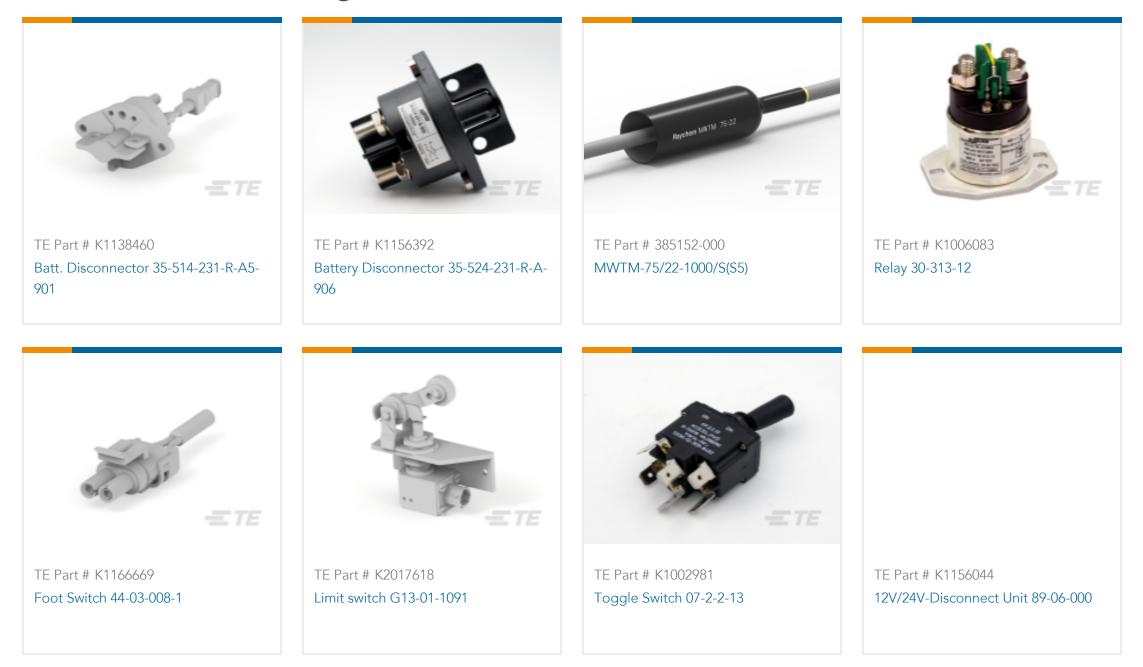

Documents

Product Drawings

C For support call +1 800 522 6752

29-211-12

Power Relays, Standard, Monostable, DC, 10 mW Coil Power Rating DC, 62 Ω Coil Resistance, Coil Suppression Diode, KISSLING Series 29



Relay 29-211-12

German

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_29-211-12_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_29-211-12_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_29-211-12_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages KISSLING SINGLE POLE POWER RELAYS Series 29 / 200A

English