

Relays & Contactors > Contactors > Mil-Aero Contactors > DC Contactors



Contact Arrangement: 1 Form X, SPST-NO DM

Wire Size: .34 mm²

Contact Current Rating: 500 A

Coil Resistance: 11 Ω

Features

Configuration Features

Auxiliary Switch Contact Arrangement	None
Contact Arrangement	1 Form X, SPST-NO DM
Number of Poles	1

Electrical Characteristics

Contact Current Rating	500 A
Coil Resistance	11 Ω
Coil Voltage Rating	12 VDC
Contact Switching Voltage (Max)	900 VDC

Body Features

Enclosure Type	Sealed
----------------	--------

Termination Features

Mains Termination Connection Type	M8 x 1.25
Auxiliary Termination Connection Type	Wire Connector
Coil Termination Connection Type	Connector

Mechanical Attachment

Torque (Main)	80 - 100 in-lbs
Product Mount Type	Chassis

Dimensions

Coil Wire Length	390 mm[15.3 in]
------------------	-----------------

Wire Size	.34 mm ²
-----------	---------------------

Operation/Application

Actuating System	DC
------------------	----

Packaging Features

Packaging Method	Individual
------------------	------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
------------------------------	---------------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
---	--------------------------------------

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Cd (7.5% in COMPONENT)
--	--

Article Safe Usage Statements:
Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.


Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

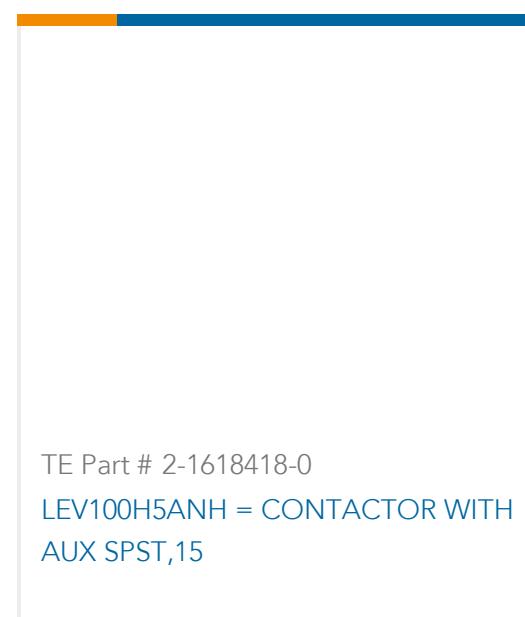
TE Part # 9-1618392-2
LEV200HLANA=RELAY, SPST-NOTE Part # 3-1618389-7
LEV100A4ANG=RELAY, 12Vdc SPST-NOTE Part # 6-1618412-9
LEV100H4ANG=CONTACTOR 12V,
AUX SPST,15"TE Part # 2-1618418-0
LEV100H5ANH = CONTACTOR WITH
AUX SPST,15TE Part # 6-1618415-2
LEV100H4FNG=CONTACTOR 12V,
AUX SPST,15"TE Part # 6-1618415-3
LEV100H5FNG = CONTACTOR WITH
AUX SPST

Also in the Series


Kilovac LEV200




DC Contactors(15)

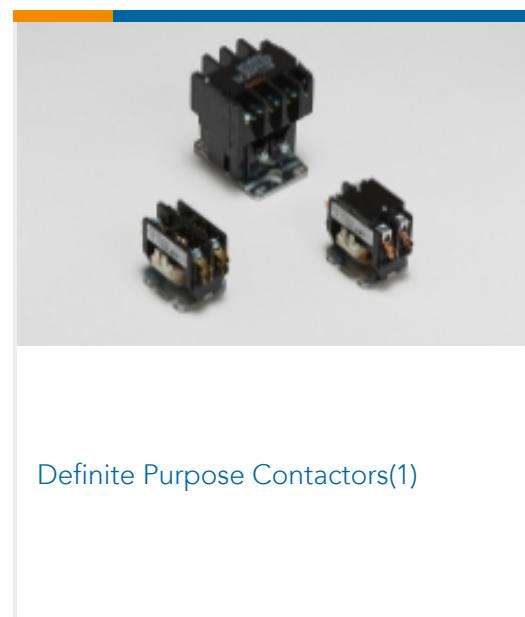

Definite Purpose Contactors(1)

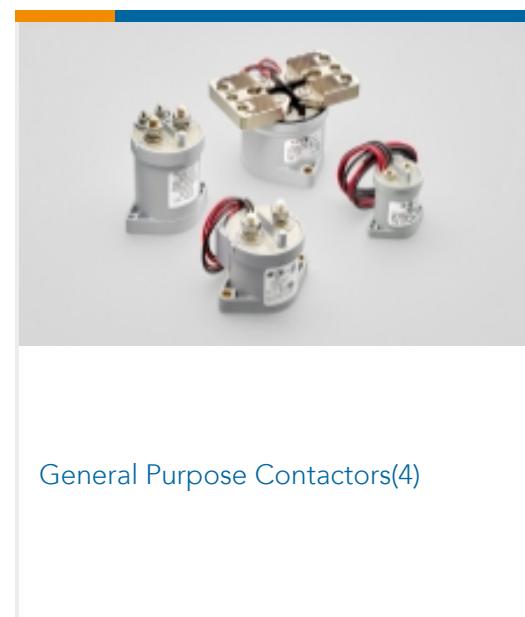

General Purpose Contactors(4)

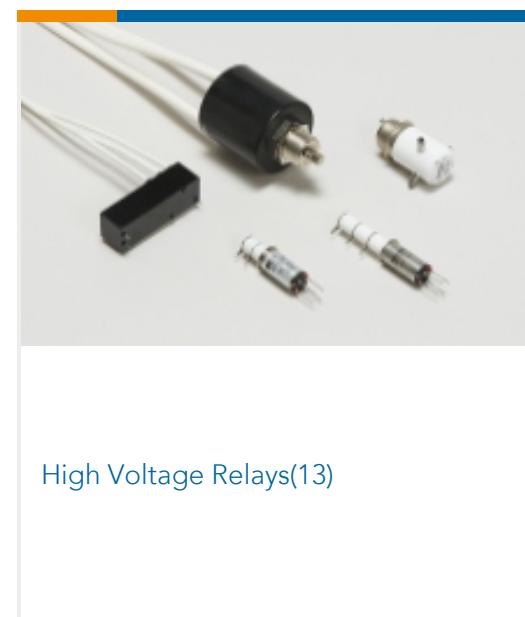

High Voltage Relays(13)

Customers Also Bought

TE Part # E42900-000
HMM-762508-2.5-8ATE Part # K1130516
Battery Disconnector 35-221-100-RTE Part # 2141608-4
5POS,AMP MCP6.3/4.8K,REC HSG,ATE Part # 5677964005
RNF-3000-39/13-X-SPTE Part # 282109-3
MINI MIC TAB CONTACTTE Part # 1534162-1
AMP MCP 1.5K, CONTACT, SWSTE Part # 2103157-1
SHIELD, PLUG, SIZE 1, Sn, HVA280TE Part # 3-968696-2
MOS STIFT-GEH 4P



Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_6-1618390-8_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6-1618390-8_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6-1618390-8_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[5-1773450-5_sec7_LEV200](#)

English