
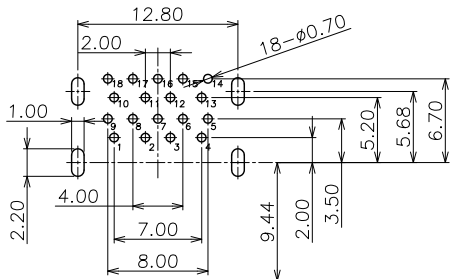
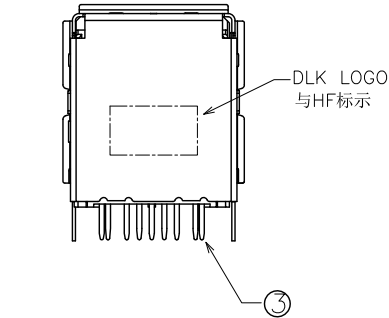


符合"DLK环境管理物质技术标准"

符合USB3.0协会规范标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
—	A	20181016	NEW RELEASE	—	—
KSECN23033	B	20231118	修改外壳脚形状及尺寸 $\triangle$ *1	覃智森	段国强

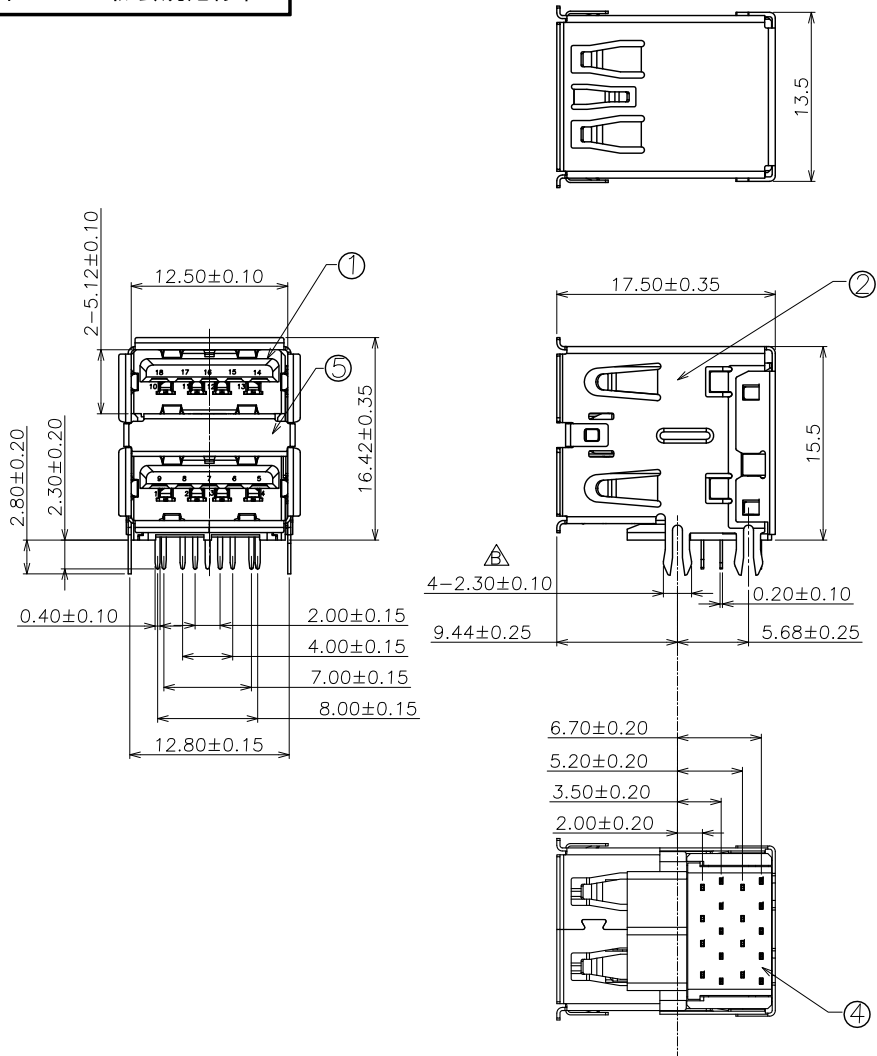

NOTE:

- MATERIAL:
  - Housing: LCP UL94v-0, color: Blue
  - Contact: Copper alloy
  - Shell: Stainless steel
- PLATING:
  - Contact: 1u" Au plated on contact Area, 50u" Min. Matte Tin plated on solder tail, 50u" Min. Nickel underplated
  - Shell: Nickel plated overall
- MECHANICAL:
  - Mating force: 3.57kgf Max.
  - Unmating force: 1.02kgf Min.
  - Durability: 1500 cycles Min.
- ELECTRICAL:
  - Current Rating: 1.5A
  - Voltage Rating: 36V
  - Dielectric strength: 500V AC FOR 1 minute
  - Insulation Resistance: 1000M $\Omega$  Min.
  - Contact Resistance: 30m $\Omega$  Max
- PACKING: Tray

NO.	ITEM	Q'TY	DESCRIPTION	FINISH
5	MIDDLE SHELL	1	Stainless steel	Ni PLATED
4	COVER	1	LCP	UL94V-0
3	CONTACT	18	Copper alloy	Au PLATED
2	SHELL	1	Stainless steel	Ni PLATED
1	HOUSING	1	LCP	UL94V-0

GENERAL TOLERANCE UNLESS OTHERWISE NOTED	
Angle	$\pm 5^\circ$
X.	$\pm 0.35$
.X	$\pm 0.25$
.XX	$\pm 0.15$
.XXX	$\pm 0.10$

**DLK** 德力康电子科技有限公司  
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	USB 3.0 AF DIP 双层 90° DIP			
	档案名称 FILE NAME:	C-U3A20-00-04	料号 PART NO:	22018L01241	
	DRAWING	王永辉	CHECKED	APPROVED	严成旺
	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1