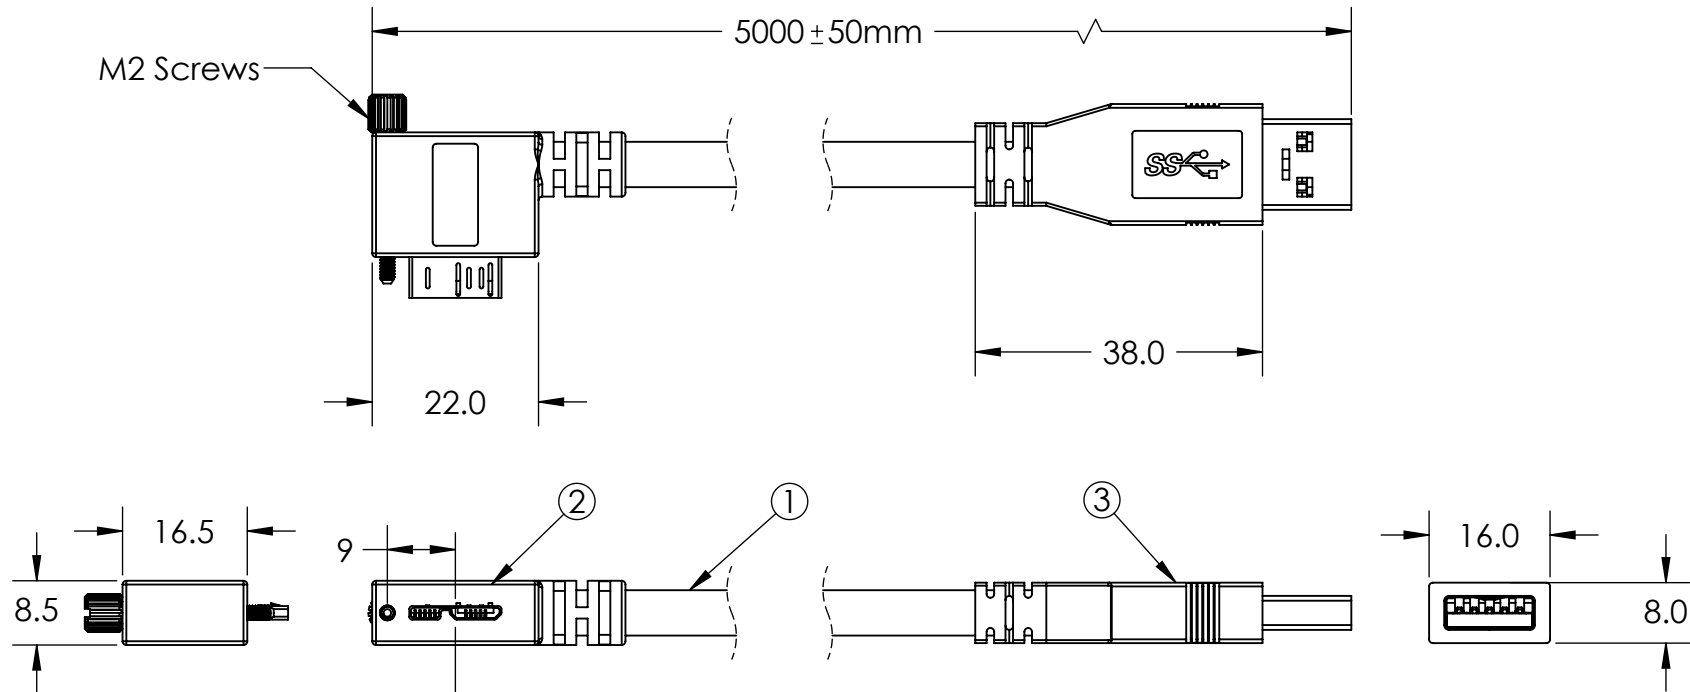


NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME**CUSTOMER SIGNATURE****DATE****COMMENTS:****WIRING STRUCTURE**

A	SIGNAL	MicroB
1	PWR	1
2	D-	2
3	D+	3
4	GND	5
5	SDP1-	6
6	SDP1+	7
7	DRAIN	8
8	SDP2-	9
9	SDP2+	10
SHELL	BRAID	SHELL

Notes:

1. Cable: USB 3.0 Black PVC Jacket.
2. Connector: USB 3.0 Angled Micro B Male Locking.
3. Connector: USB 3.0 A Male.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
± NA X ± 0.5
XX ± 0.25
XXX ± 0.125

PROJ. SCALE: 1:1

REV. A

TITLE: USB 3.0 Angled Micro B Male Locking to A Male, 5m, Black.

DATE: 2/6/2017

DRAWN BY:

APPROVED BY:

PART NUMBER:

US226AMCBR2I5M

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS:

Drawing generated

*100% OPEN, SHORT, MISWIRE TESTING;

*RoHS COMPLIANT PRODUCT;

*BOTH SHELL CLAM AND COPPER FOIL HAVE 360 DEGREE CONTACT WITH BRAIDING;