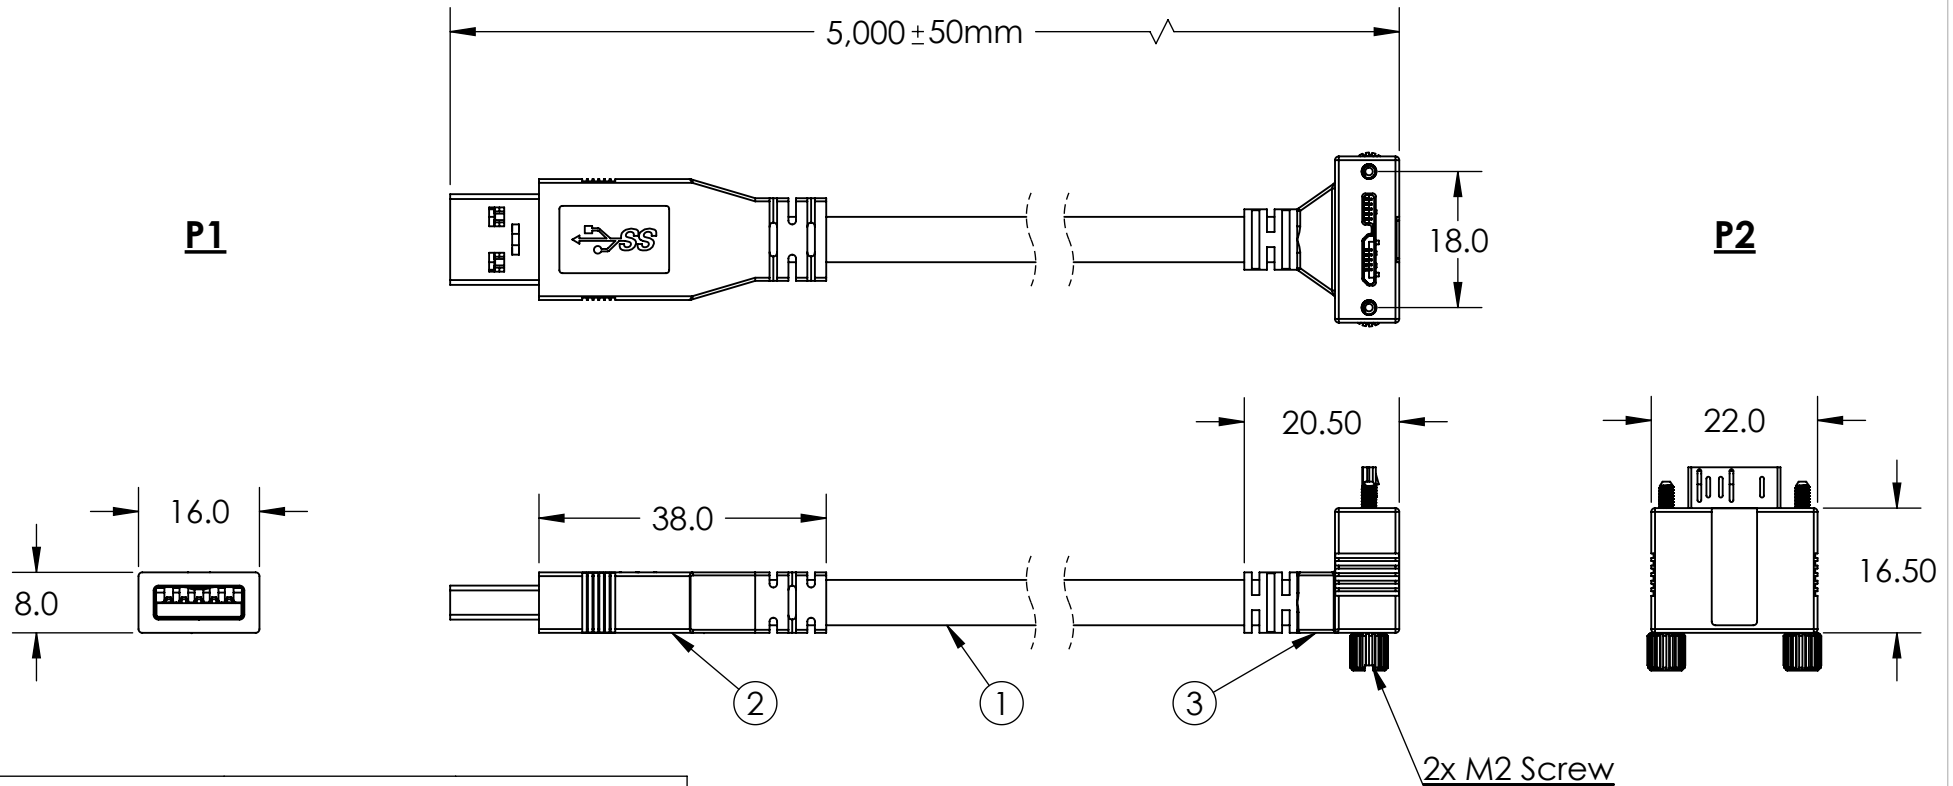


**NEWNEX PROPRIETARY**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

**COMPANY NAME****CUSTOMER SIGNATURE****DATE****COMMENTS:****P1****P2****WIRING STRUCTURE**

P1	SIGNAL	P2
1	PWR	1
2	D-	2
3	D+	3
4	GND	5
5	SDP1-	6
6	SDP1+	7
7	DRAIN	8
8	SDP2-	9
9	SDP2+	10
SHELL	BRAID	SHELL

**Notes:**

1. Cable: USB 3.0 Black PVC Jacket.
2. Connector: USB 3.0 A Male.
3. Connector: USB 3.0 Angled Micro-B Male Dual Screw Locking.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MILLIMETERS  
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES  
± NA .X ± 0.5  
.XX ± 0.25  
.XXX ± 0.125



SCALE: 1:1

REV. A

TITLE: USB 3.0 A Male to Angled Micro B Male with Dual Screw Locking, 5M, Black.

DRAWN BY:

APPROVED BY:

DATE: 11/12/2014

PART NUMBER:

US226AMCBR115M

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS:

Drawing generated

\*100% OPEN, SHORT, MISWIRE TESTING

\*RoHS compliant product

\*Both shell clam and copper foil have 360 degree contact with braiding