
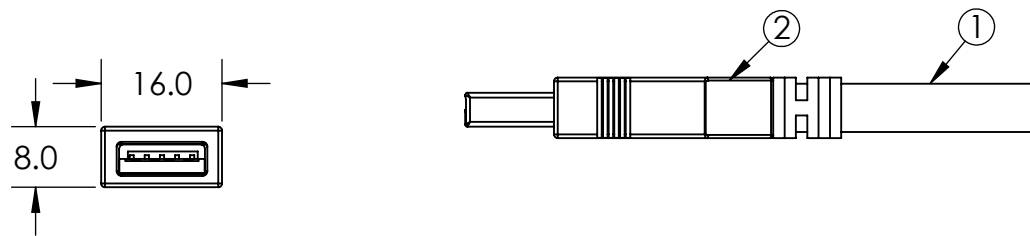
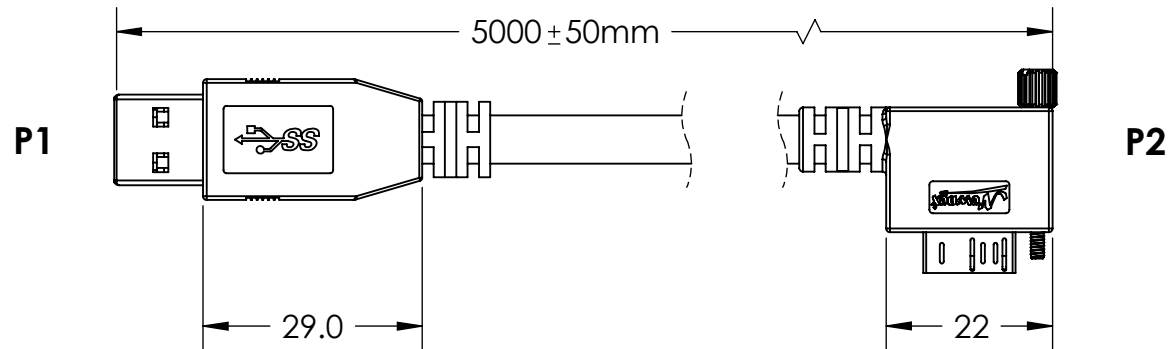


**NEWNEX PROPRIETARY**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

**COMPANY NAME****CUSTOMER SIGNATURE****DATE****COMMENTS:****WIRING STRUCTURE**

P1	SINGAL	P2
1	PWR	1
2	D-	2
3	D+	3
4	GND	5
5	SDP1-	6
6	SDP1+	7
7	DRAIN	8
8	SDP2-	9
9	SDP2+	10
SHELL	BRAID	SHELL

**Notes:**

1. Cable: USB 3.0 Black PVC Jacket.
2. Connector: USB 3.0 A Male.
3. Connector: USB 3.0 Angle Micro B Male Locking.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MILLIMETERS  
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES  
± NA .XX ± 0.5  
.XXX ± 0.125 ± 0.5°

PROJ. SCALE: 1:1

REV. A

DATE: 6/19/2017

TITLE: USB 3.0 A Male to Angle Micro  
B Male Locking, 5m, Black.

DRAWN BY: XW

APPROVED BY: ZL

PART NUMBER: US226AMCBR4I5M

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS:

Code: CWG: custom wire guage; CWI: custom wiring ;NOV: new overmold; CSW: custom screw

\*100% OPEN, SHORT, MISWIRE TESTING

\*RoHS compliant product

\*Both shell clam and copper foil have 360 degree contact with braiding