

Power Cord 5-15P to 5-15R SJT 16/3

Technical Data Sheet

Length	Black
1 ft.	CM-210159BKBSTK
3 ft.	CM-210160BKBSTK
6 ft.	CM-210321BKBSTK
10 ft.	CM-210322BKBSTK
15 ft.	CM-210323BKBSTK
25 ft.	CM-210324BKBSTK

Specifications

- NEMA 5-15P to 5-15R
- AC125V 13A 1625W
- 16AWG / 3



Compliance

- UL Approved
- RoHS Compliant


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

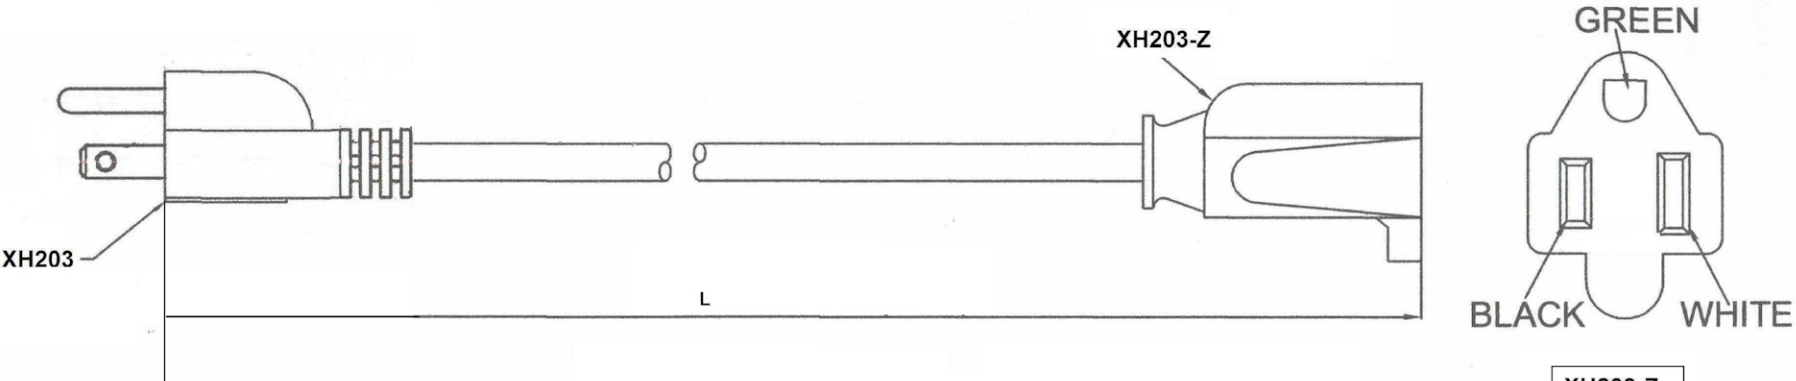

XH203-Z
XUANHUA
E257089

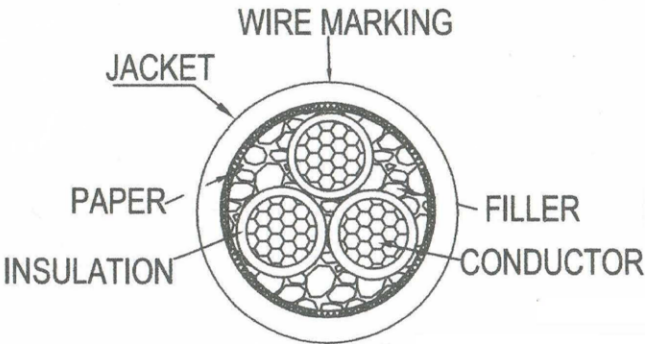


WIRE MARKING: (Hollow)		UL c(UL) SJT 3C 16 AWG(1.31mm ²) 60C VW-1 300V E313867 100030-765 FT1 NINGBO XUANHUA					
Conductor		Insulation			Jacket		Overall diameter
AWG		Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Thick	
16AWG 26/0.25						0.76mm	8.6+-0.2mm
(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)							

CABLEMAX

Item No	Length (ft)	Tolerance (inches)
CM-210159BKBSTK	1	±0.79
CM-210160BKBSTK	3	±0.79
CM-210321BKBSTK	6	±0.79
CM-210322BKBSTK	10	±0.79
CM-210323BKBSTK	15	±0.79
CM-210324BKBSTK	25	±0.79

DRAWN BY:	DATE: 2016-01-21	DESCRIPTION: POWER CORD 5-15P TO 5-15R BLACK SJT 16/3		
CHECKED BY:	SHEET 1 of 1	ITEM NO.		
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm	

NOTE: CARTON MATERIAL MUST BE A=A

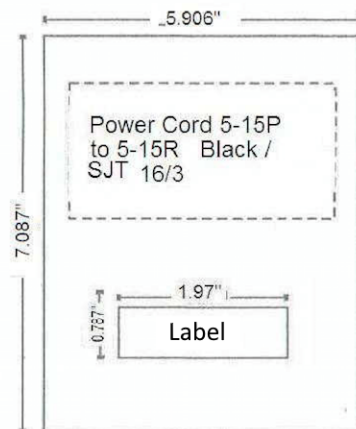

PART NO.	PE BAG SIZE INCHES	LENGTH (FT)	CARTON SIZE INCHES	QTY	GW LBS
CM-210159BKBSTK	5.91* 7.09	1	20.08*12.20* 8.66	100	37.48
CM-210160BKBSTK	5.91* 7.09	3	20.08*12.20* 9.06	100	41.37
CM-210321BKBSTK	5.91* 7.09	6	20.08*12.20* 8.66	50	37.48
CM-210322BKBSTK	5.91* 7.09	10	20.08*12.20* 9.45	50	41.37
CM-210323BKBSTK	5.91* 7.09	15	20.08*12.20* 9.45	30	37.48
CM-210324BKBSTK	5.91* 7.09	25	20.08*12.20* 9.45	15	37.48

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

Side Mark

↑↑

☂

RoHS Compliant

P/N:
QTY: PCS
N.W.: KGS
G.W.: KGS
Date Code: 04-2016
Vender Code: PS01051

Main Mark

P/O:
P/N:
QTY:
C/NO.:

MADE IN CHINA



CABLEMAX

DRAWN BY	DATE: 2015/12/15	DESCRIPTION:
CHECKED BY	SHEET 1 of 2	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00
	UNIT:mm	