


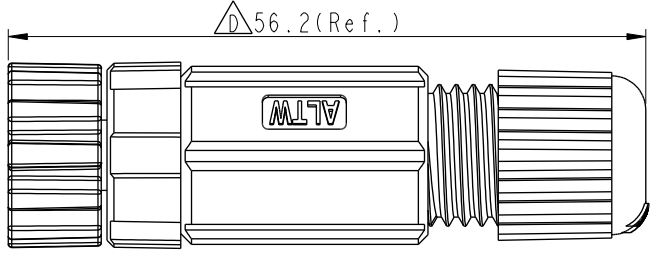



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C192160	2019/12/19	Peng	△ XI
E	C210686	2021/05/07	Vicky	△ X5
F	C221880	2022/12/06	Vicky	△ XI

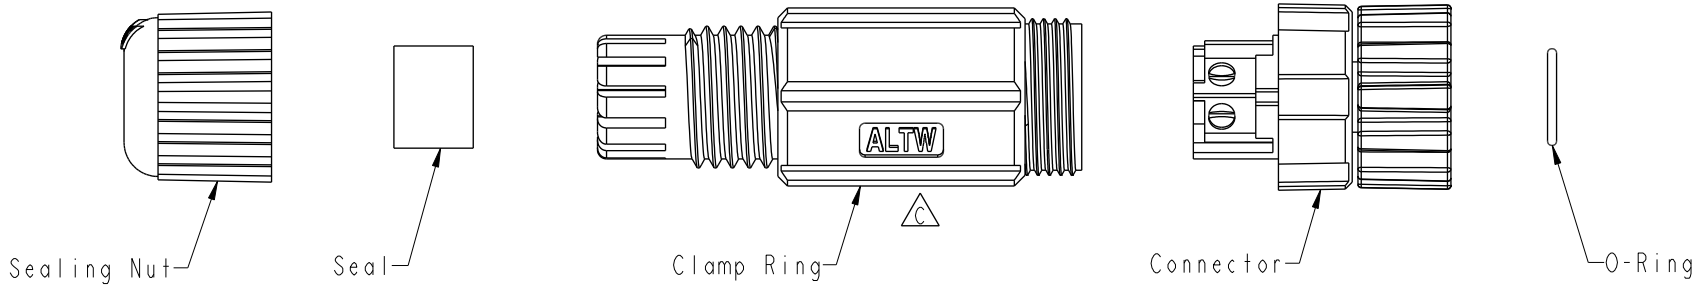

- △ E Note:
- * RoHS Compliant
 - * ∅ Important Dimension
 - △ F * Waterproof rate: IP67, mated Connector
 - * Housing: Thermoplastic, Black
 - * Pin: Copper alloy, Gold plated
 - * Extension Nut: Thermoplastic, Black
 - * Nut: Thermoplastic, Black
 - * O-Ring: Rubber, Black
 - * O-Ring: Rubber, Green
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber, Black, OD: ∅4.5mm-∅6.5mm
 - * One set unassembled in one pe bag

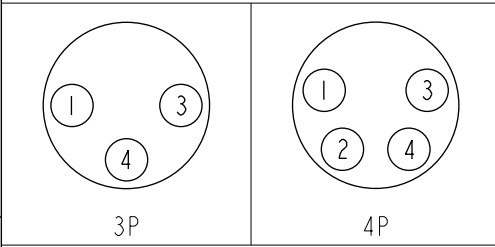

△ E 8P-XXBFFB-SL7001
 XX: No. Of Pin

△ E Pin Assignments Front View

UNIT: mm			TITLE O SEN, M8 PLASTIC CABLE W/O SR, F, F, FI SCREW IN
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 2:1	SIZE A4	SHEET 1 OF 1
REV. F	WC-REV. A.3	∅ Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO ALTW	DRAWN BY Ruru	DATE 2017-06-01
DWG NO △ E 8P-XXBFFB-SL7001	CHECKED BY Rita	DATE 2017-06-01
CUSTOMER	APPROVED BY Max	DATE 2017-06-01