AQ4021 Series 2.5pF, 25A Discrete TVS Diode


AUTOMOTIVE GRADE HF RoHS Pb GREEN



Description

The AQ4021 components integrate low capacitance steering diodes with one or two avalanche breakdown diodes for unidirectional or bidirectional protection, respectively, to protect against ESD and lightning induced surge events. These components can safely absorb up to 25A per IEC 61000-4-5 2nd edition (t_p=8/20µs) without performance degradation and a minimum ±30kV ESD per IEC 61000-4-2 International Standard. The low loading capacitance and high surge capability make it ideal for protecting telecommunication ports such as Ethernet and other high speed data interfaces.


Pinout

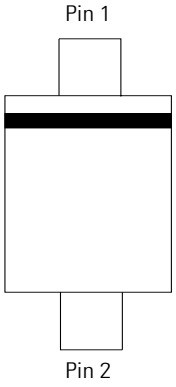

Features

- ESD, IEC 61000-4-2, ±30kV contact, ±30kV air
- EFT, IEC 61000-4-4, 40A (5/50ns)
- Lightning, IEC 61000-4-5 2nd edition, 25A (t_p=8/20µs)
- Low capacitance of 2.5pF (@ V_R=0V)
- Low leakage current
- Unidirectional and bidirectional configuration
- Small SOD323 package fits 0805 footprints
- AEC-Q101 Qualified
- Moisture Sensitivity Level(MSL -1)
- Halogen free, lead free and RoHS compliant

Functional Block Diagram

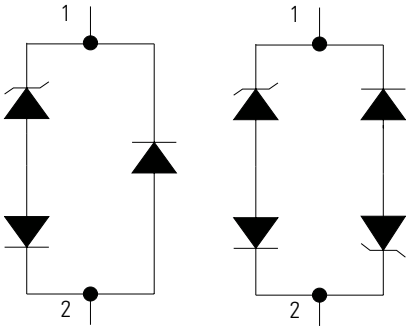

Unidirectional
AQ4021-01FTG

Bidirectional
AQ4021-01FTG-C

Applications

- 10/100/1000 Ethernet
- T1/E1/T3/E3
- USB 1.1/2.0
- Power Ports
- Computers and Peripherals
- Instrumentation
- Medical Equipment
- CAN Bus protection
- Automotive applications

Life Support Note:

Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

© 2021 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 03/12/21

TVS Diode Array

Lightning Surge Protection- AQ4021 Series

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
I_{PP}	Peak Current (t_p=8/20µs)	25	A
P_{Pk}	Peak Pulse Power (t_p=8/20µs)	600	W
T_{OP}	Operating Temperature	-40 to 150	°C
T_{STOR}	Storage Temperature	-55 to 150	°C


Notes:
CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Electrical Characteristics (T_{OP}=25°C)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Breakdown Voltage	V_{BD}	I_R=2uA	6.3			V
Reverse Standoff Voltage	V_{RWM}	I_R≤1µA			5.0	V
Leakage Current	I_{LEAK}	V_R=5.0V			0.5	µA
Clamp Voltage[1]	V_C	I_{PP}=1A, t_p=8/20µs, Fwd		9.3		V
		I_{PP}=10A, t_p=8/20µs, Fwd		14.0		V
		I_{PP}=25A, t_p=8/20µs, Fwd		20.5		V
Dynamic Resistance [2]	R_{DYN}	TLP, t_p=100ns, I/O to GND		0.35		Ω
ESD Withstand Voltage[1]	V_{ESD}	IEC 61000-4-2 (Contact Discharge)	±30			kV
		IEC 61000-4-2 (Air Discharge)	±30			kV
Diode Capacitance[1]	C_D	Reverse Bias=0V, f=1MHz		2.5		pF

Note:
1. Parameter is guaranteed by design and/or component characterization.
2. Transmission Line Pulse (TLP) with 100ns width, 2ns rise time, and average window t1=70ns to t2= 90ns

Normalized Capacitance vs. Bias Voltage

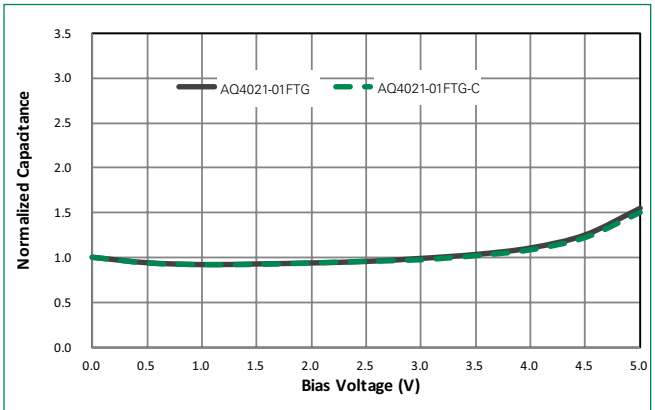

8/20µs Pulse Waveform

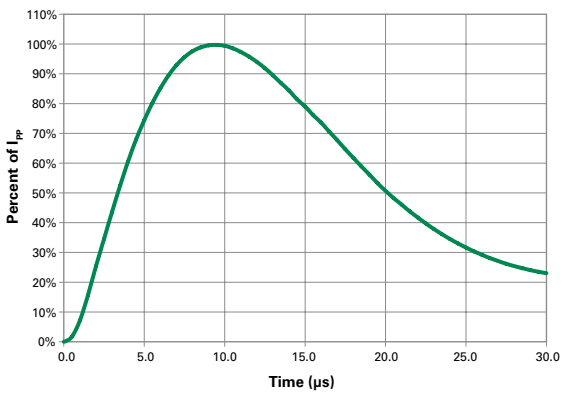


© 2021 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 03/12/21


TVS Diode Array

Lightning Surge Protection- AQ4021 Series


Postive Transmission Line Pulsing (TLP) Plot

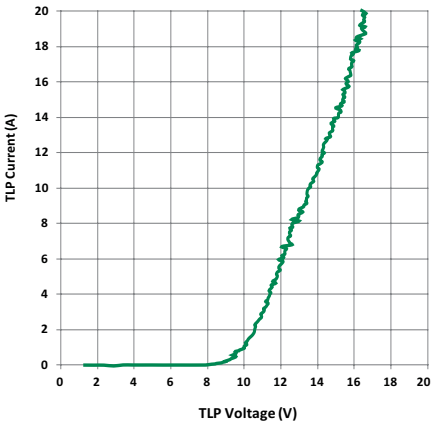

Negative Transmission Line Pulsing (TLP) Plot

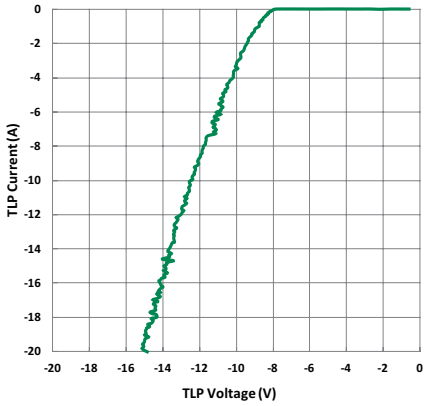


Clamping Voltage vs. I_{PP}

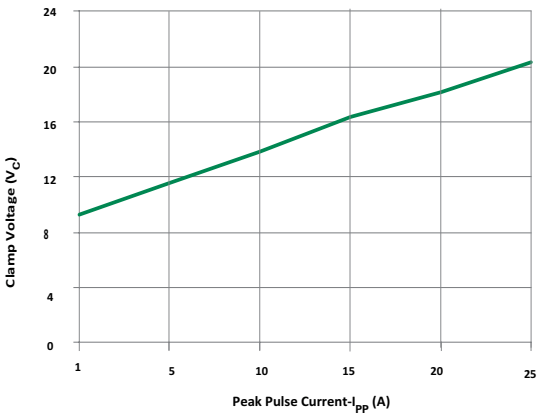

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	**- Temperature Min ($T_{s(min)}$)**	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T_L) to peak		3°C/second max
$T_{S(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	**- Temperature (T_L) (Liquidus)**	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		$260^{+0/-5}$ °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

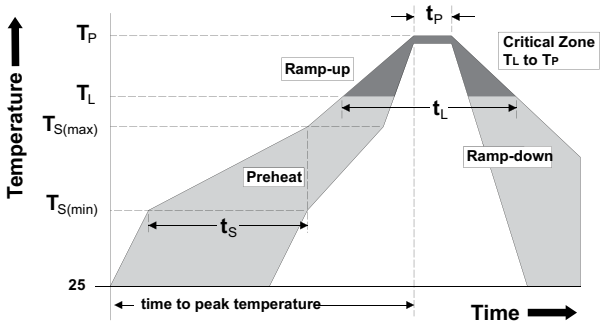


© 2021 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 03/12/21

TVS Diode Array


Lightning Surge Protection- AQ4021 Series

Part Marking System

AQ4021-01FTG



AQ4021-01FTG-C



Product Characteristics

Lead Plating	Matte tin
Lead Material	Copper Alloy
Lead Coplanarity	0.0004 inches (0.102mm)
Substrate material	Silicon
Body Material	Molded Compound
Flammability	UL Recognized compound meeting flammability rating V-0

Notes :
1. All dimensions are in millimeters
2. Dimensions include solder plating.
3. Dimensions are exclusive of mold flash & metal burr.

Part Numbering System


AQ 4021 - 01 F T G - C

- AQ: Automotive Grade TVS Diode Arrays (SPA® Diodes)
- 4021: Series
- 01: Number of Channels
- F: Package — F: SOD323
- T: Tape & Reel
- G: Green
- C: Blank = Unidirectional; C= Bidirectional

Ordering Information

Part Number	Package	Marking	Min. Order Qty.
AQ4021-01FTG	SOD323	05	3000
AQ4021-01FTG-C	SOD323	5C	3000

Package Dimensions -SOD323

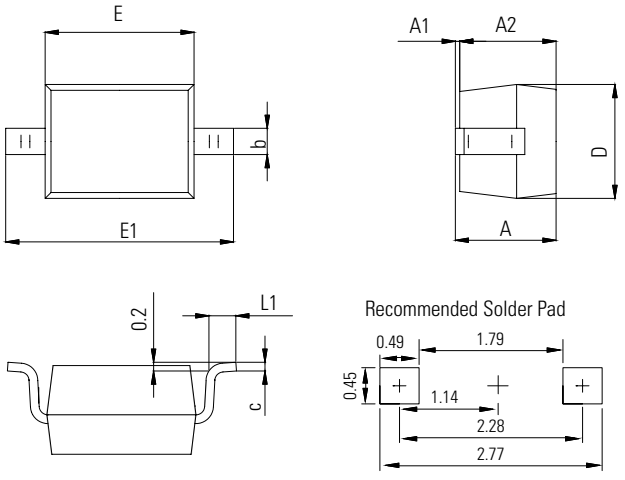



Unit: mm


Symbol	SOD323			
	Millimeters		Inches	
	Min	Max	Min	Max
A	0.80	1.00	0.031	0.039
A1	0.00	0.10	0.000	0.004
A2	0.80	0.90	0.031	0.035
b	0.25	0.35	0.010	0.014
c	0.08	0.15	0.003	0.006
D	1.20	1.40	0.047	0.055
E	1.60	1.80	0.063	0.071
E1	2.50	2.70	0.098	0.106
L1	0.25	0.40	0.010	0.016

© 2021 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 03/12/21


Embossed Carrier Tape & Reel Specification — SOD323

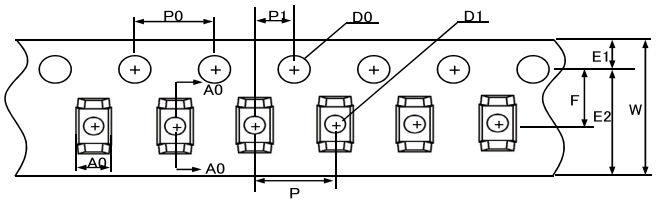





Symbol	Millimeters
A0	1.46+/-0.10
B0	2.90+/-0.10
W	8.0+0.3/-0.10
D0	1.50+0.10
D1	0.45min/1.15max
E1	1.75+/-0.10
E2	-
F	3.50+/-0.10
P0	4.00+/-0.10
P	4.00+/-0.10
P1	2.00+/-0.05
K0	1.25+/-0.10
T	0.254+/-0.02

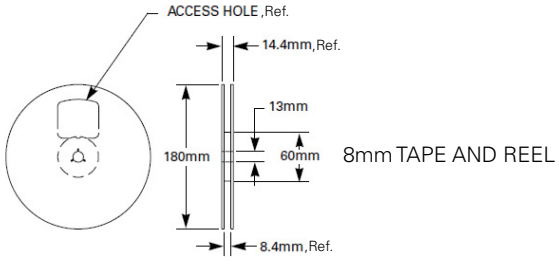

8mm TAPE AND REEL

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.

© 2021 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 03/12/21