



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 - 1.65 mm²**

Mating Tab Width: **2.8 mm [.11 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

	.038 in
Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.25 mm[.01 in]
Product Length	14 mm[.551 in]
Compatible Insulation Diameter Range	2.01 - 3.1 mm[.079 - .122 in]
Wire Size	.51 - 1.65 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Packaging Features

Packaging Quantity	1000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2150017-1
OCEAN_2.0_Applicator-E-070F130F-REM

TE Part # 7-2150017-7
OCEAN_2.0_SPARE_PART_KIT-070F130F

TE Part # 2150017-2
OCEAN_2.0_Applicator-E-070F130F-REA

TE Part # 7-2150017-1
OCEAN_2.0_Applicator-E-070F130F

TE Part # 7-2150017-2
OCEAN_2.0_Applicator-E-070F130F

Also in the Series | FASTIN-FASTON 110

Automotive Housings(6)

Automotive Terminals(5)

Crimp Terminal Housings(34)

Insertion & Extraction Tools(3)

Quick Disconnects(83)

Customers Also Bought



TE Part # 1456989-1
2x8 Fem unsealed LP assy Key A



TE Part # 9-1676123-6
1/2W SM M/OX 5% 7K5



TE Part # 41801
250 FASTON FLAG REC 18-12 AWG BR



TE Part # 5-967630-1
FLACHSTE-GEH2,8 21P



TE Part # 0021036033
RBK-ILS-125-NR3-0-25MM




TE Part # 6776556004
RPPM-NR510-X-50MM



TE Part # 965383-1
MQS SICHERGSCHIEBER 8POS



TE Part # 1-1393204-0
V23148-B0007-A101

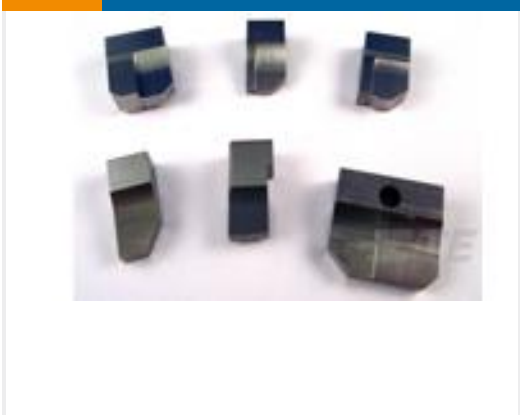

TE Part # 690618-8
ANVIL-SPLICE TYPE



TE Part # 925014
2 P FF 110(2.8 MM) HOUSING RECEPTACLE

Documents

Product Drawings

FASTON 110 REC 20-15 AWG PTPB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_160655-2_AJ.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_160655-2_AJ.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_160655-2_AJ.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



EB**General Application Specification for Open Barrel Terminals

English

Application Specification

English