

170454-1 ✓ ACTIVE

Positive Lock | Positive Lock 250

TE Internal #: 170454-1

Quick Disconnects, Receptacle, 18 - 14 AWG Wire Size, .82 - 2.08 mm² Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight, Brass, Positive Lock 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 - 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
---------------------	--------

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Quick Disconnect Terminal Type	Receptacle
--------------------------------	------------

Mating Tab Width	6.35 mm [.25 in]
------------------	------------------

Mating Tab Thickness	.81 mm [.032 in]
----------------------	------------------

Terminal Orientation	Straight
----------------------	----------

Contact Base Material	Brass
-----------------------	-------

Terminal Plating Material	Unplated
---------------------------	----------

Crimp Type	F-Crimp
------------	---------

Barrel Type	Open
-------------	------

Termination Features



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Extraction Force	4.9 - 29.4 Newton
------------------	-------------------

Wire Insulation Support	With
-------------------------	------

Mating Retention Type	Dimple
-----------------------	--------

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
-----------------------------	-----------------

Product Length	22.8 mm[.89 in]
----------------	-----------------

Compatible Insulation Diameter Range	2.21 - 3.4 mm[.087 - .134 in]
--------------------------------------	-------------------------------

Wire Size	.82 - 2.08 mm ²
-----------	----------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
-----------------------------	----------------------------

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	3000
--------------------	------

Packaging Method	Loose Piece/Carton
------------------	--------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 172863-2
POSITIVE LOCK (PL) .250 (6.3 MM)



TE Part # 172434-2
POSITIVE LOCK 250 (6.3 MM)
HOUSING



TE Part # 172320-2
POSITIVE LOCK 250 (6.3 MM)
HOUSING



TE Part # 174090-2
PL .250 (6.3 MM) HOUSING



TE Part # 724659-2
EXT TOOL FOR POSITIVE .250



TE Part # 172320-1
POSITIVE LOCK 250 (6.3 MM)
HOUSING



TE Part # 172864-2
250 HSG. REC. 6mm 2P BLACK



TE Part # 174090-1
1P POSITIVE LOCK HSG



TE Part # 172320-4
POSITIVE LOCK 1P GREEN



TE Part # 172433-2
250 AUTOMOTIVE POSITIVE LOCK 2P



TE Part # 172434-1
POSITIVE LOCK 250 (6.3 MM)
HOUSING



TE Part # 9-172320-2
POSIT LOCK HSG 1P BLACK VO94



TE Part # 2150378-1
OCEAN_2.0_Applicator-E-110F170F-
REM



TE Part # 2150378-2
OCEAN_2.0_Applicator-E-110F170F-
REA



TE Part # 7-2150378-7
OCEAN_2.0_SPARE_PART_KIT-
110F170F



TE Part # 7-2150378-1
OCEAN_2.0_Applicator-E-110F170F

Also in the Series | Positive Lock 250



Automotive Terminals(1)



Crimp Terminal Housings(191)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)




Quick Disconnects(186)


Customers Also Bought



TE Part # 1318756-2
TH/.025 CONNECTOR SYSTEM,
HOUSING

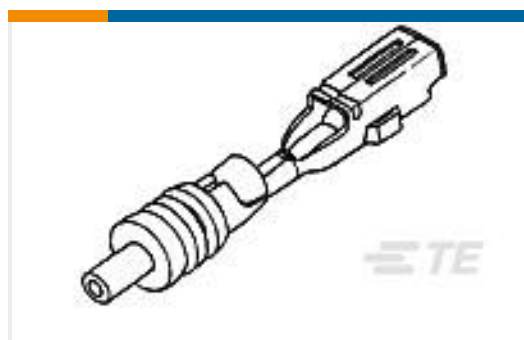

TE Part # 171630-5
E-J MK-2 070 REC CONT

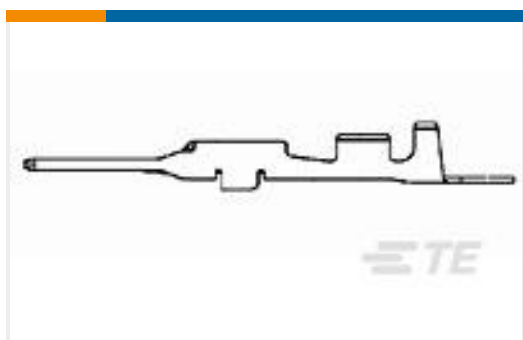

TE Part # 1565963-1
040III TAB NON SEALED TIN



TE Part # 636901P004
QS1500-NO.3-F7-0-30MM



TE Part # 1827120-1
SQUIB LOCKING BUTTON



TE Part # 1674311-7
0.64 III RCPT 3 Serrations Pre-Tin



TE Part # 2174114-1
WIRE COVER ASSEMBLY 50POS 0.5/1.
0 SEALED



TE Part # 170046-1
250 FASTON, REC., 16-14 AWG, BR

Documents

Product Drawings

[PL 250 AUTOMOTIVE REC 18-14 0.40 X 21 BR](#)

English

CAD Files

[3D PDF](#)

[3D](#)



Customer View Model

[ENG_CVM_CVM_170454-1_T.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_170454-1_T.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_170454-1_T.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Crimping of 250 Series, Automotive Positive Lock Receptacle Contact](#)

English

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

[Instruction Sheet \(non U.S.\)](#)

Japanese