




Relays & Contactors > Relays > Power Relays > P&B SSR OUTPUT DC MODULES

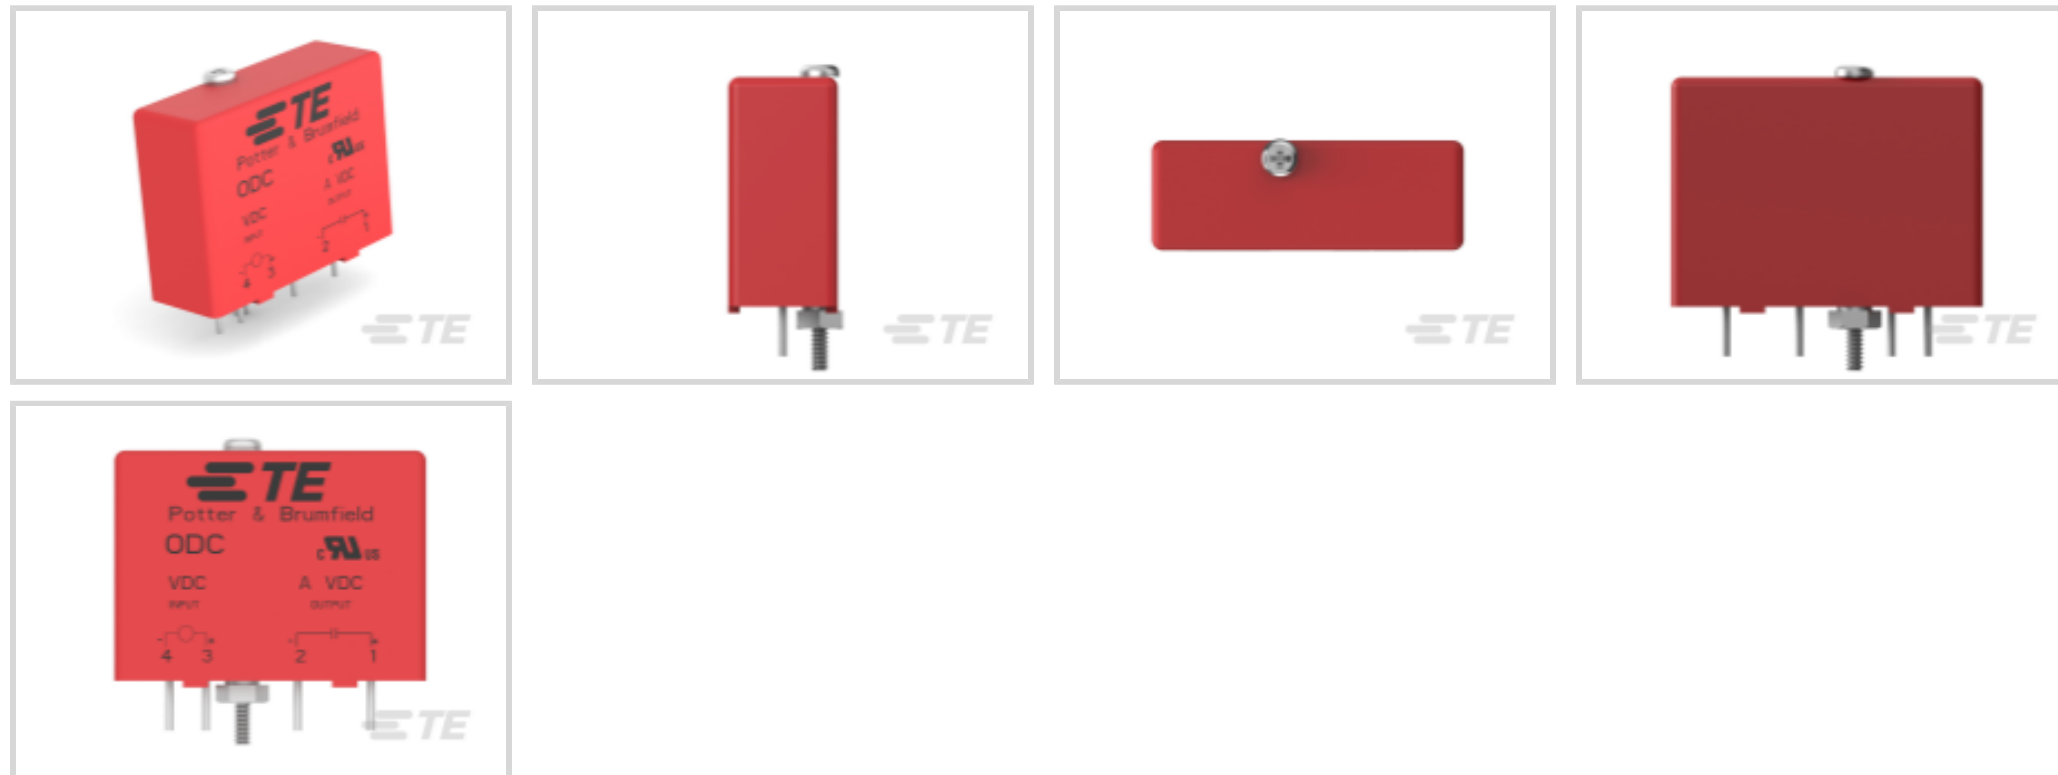

Relay Type: **Solid State**

Contact Arrangement: **1 Form A (SPST-NO)**

Product Mount Type: **Printed Circuit Board**

Relay Connection Type: **PCB Termination**

Terminal Configuration: **Solder Pins**

[All P&B SSR OUTPUT DC MODULES \(6\)](#)

## Features

### Product Type Features

Relay Type	Solid State
------------	-------------

### Configuration Features

Contact Arrangement	1 Form A (SPST-NO)
---------------------	--------------------

### Electrical Characteristics

Output Current Rating	.01 - 3 A
Output Voltage (Max)	60 V
Output Voltage Rating (DC Relays)	3 - 60 VDC
Output Current (Min)	.01 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Input Voltage	3 - 8 VDC

### Body Features

Primary Product Color	Red
Product Weight	35 g[1.38 oz]



**Termination Features**

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

**Mechanical Attachment**

Product Mounting Feature Type	Hex Nut
Product Mount Type	Printed Circuit Board

**Dimensions**

Product Width	15.15 mm[.596 in]
Product Length	42.3 mm[1.66 in]
Product Height	31.7 mm[1.24 in]

**Usage Conditions**

Operating Temperature Range	-30 - 80 °C
-----------------------------	-------------

**Operation/Application**

Output Switching	Zero
Output Current Type	DC

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (88% in Component Part) <b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




TE Part # 4-1393028-5  
ODC-5A = PCB MOUNT,1A, 250V DC-DC I/p



TE Part # 2319263-2  
OAC-5R = PCB MOUNT, 5A,240V AC-DC I/p

## Also in the Series | Potter & Brumfield ODC

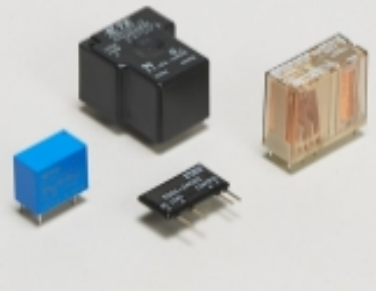

Power Relays(6)

## Customers Also Bought



TE Part # 5050871-8  
SOCKET,MIN-SPR SN SER-5




TE Part # 5050865-5  
SOCKET,MIN-SPR SN-AU SER-4



TE Part # 2-1825011-2  
ASF42G04=4PDT AUTOSLIDE



TE Part # 2-520273-2  
ULTRAFast 110 ASSY REC 22-18 TPBR LP

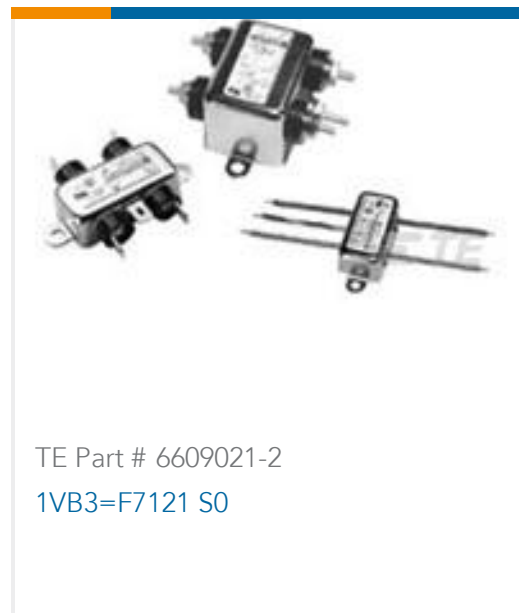

## Documents

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393028-4\\_C1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393028-4\\_C1.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393028-4\\_C1.2d\\_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[ODC\\_Datasheet](#)

English

[ODC DC Output Module Data Sheet](#)

English

### Agency Approvals

[UL](#)

English