PT570110 ✔ ACTIVE

SCHRACK | SCHRACK Miniature Relay PT

TE Internal #: 8-1419111-3

Power Relays, Industrial Panel Plug-In, Monostable, 750 mW Coil Power Rating DC, 16133 Ω Coil Resistance, SCHRACK Miniature Relay PT

View on TE.com >

Relays & Contactors > Relays > Power Relays







Relay Type: **Industrial Panel Plug-In**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **750 mW**

Coil Resistance: **16133 Ω**

Coil Special Features: **UL Coil Insulation Class F**

Features

Product Type Features

Relay Type	Industrial Panel Plug-In

Configuration Features

Insulation Special Features	5000V Initial Surge Withstand Voltage between Contacts & Coil
Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	4 Form C (4 CO)
Contact Number of Poles	4

Electrical Characteristics

Insulation Initial Dielectric Between Contacts & Coil	1200 Vrms
Insulation Initial Dielectric Between Open Contacts	1200 Vrms
Contact Limiting Making Current	12 A
Contact Limiting Short-Time Current	300 A
Insulation Initial Dielectric Between Adjacent Contacts	2500 Vrms
Contact Limiting Breaking Current	6 A
Coil Power Rating DC	750 mW
Coil Resistance	16133 Ω
Coil Voltage Rating	110 VDC
Contact Current Rating	6 A

Contact Switching Load (Min)	10mA @ 12V
Contact Switching Voltage (Max)	240 VAC
Contact Voltage Rating	240 VAC

Body Features

Product Weight	30 g[1.058 oz]

Contact Features

Contact Material	AgNi90/10

Termination Features

Relay Connection Type	Plug-In

Mechanical Attachment

Product Mount Type	Socket

Dimensions

Insulation Clearance Between Contact & Coil	3 mm
Insulation Creepage Between Contact & Coil	4 mm[.157 in]
Product Width	22.5 mm[.885 in]
Product Length	28 mm[1.1 in]
Product Height	29 mm[1.14 in]

Usage Conditions

Environmental Ambient Temperature (Max)	70 °C[158 °F]
Operating Temperature Range	-40 - 70 °C

Operation/Application

Actuating System	DC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Carton & Tube

Other

Length Class (Mechanical)	25 - 30 mm
Insulation Creepage Class	3 - 5.5 mm
Insulation Clearance Class	2.5 - 4 mm
Height Class (Mechanical)	25 - 30 mm
Coil Power Rating Class	600 - 800 mW

Width Class (Mechanical)	20 - 25 mm
Contact Current Class	5 - 10 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Hand solderable with lead free solder

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 1-1415526-1
PT78742



TE Part # 2-1415526-1
PT17021



TE Part # 6-1415037-1
PT17040



TE Part # 1860000-1
PT7874P



TE Part # 1816124-1
PT17024



TE Part # 9-1415036-1
PTMT00A0



TE Part # 4-1415033-1
PT78740



TE Part # 5-1415037-1
PT17016




TE Part # 5-1419111-9
PT28800



TE Part # 3-1415043-1
PT78604



TE Part # 1393162-1
PT28802

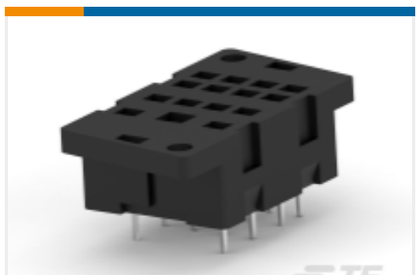


TE Part # 4-1415043-1
PT78600



TE Part # 5-1415034-1
PT78741



TE Part # 1-1415539-4
PTML0220

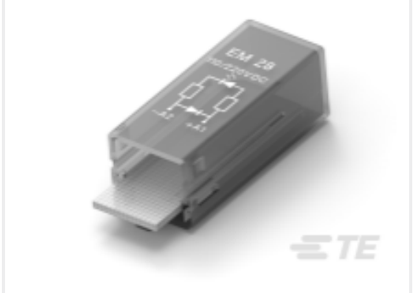

TE Part # 1-1415539-6
PTMG0220




TE Part # 1415037-1
PTMT00L0



TE Part # 1-1415539-7
PTMG0110



TE Part # 1860214-1
PT170P1 Jumper Link

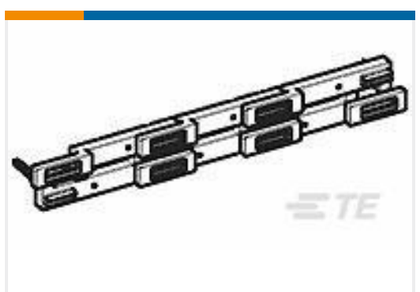


TE Part # 1860517-5
PT170R6 Jumper Bar



TE Part # 2-1415392-1
PTML0110

Also in the Series | SCHRACK Miniature Relay PT

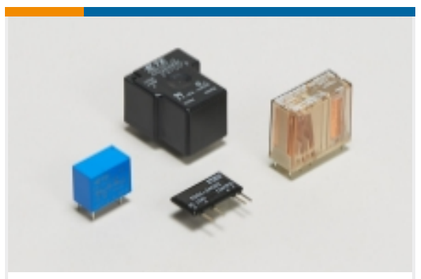

Power Relays(158)

Customers Also Bought

Power Relays, Industrial Panel Plug-In, Monostable, 750 mW Coil Power Rating DC, 16133 Ω Coil Resistance, SCHRACK Miniature Relay PT



TE Part # 8-1419111-8
PT570548



TE Part # 6-1419111-9
PT370730



TE Part # 1-1393154-2
PT570024



TE Part # 6-1415035-1
RT78726



TE Part # 9-1419111-1
PT570730



TE Part # 9-1415071-1
PT78730



TE Part # 7-1393243-5
RT424110



TE Part # 2022104-1
XT17017



TE Part # 4-1393235-7
RP821F606

Documents

CAD Files

3D PDF

3D

Customer View Model
ENG_CVM_CVM_8-1419111-3_99.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_8-1419111-3_99.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_8-1419111-3_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditionsof use.

Datasheets & Catalog Pages

Miniature Relay PT

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English