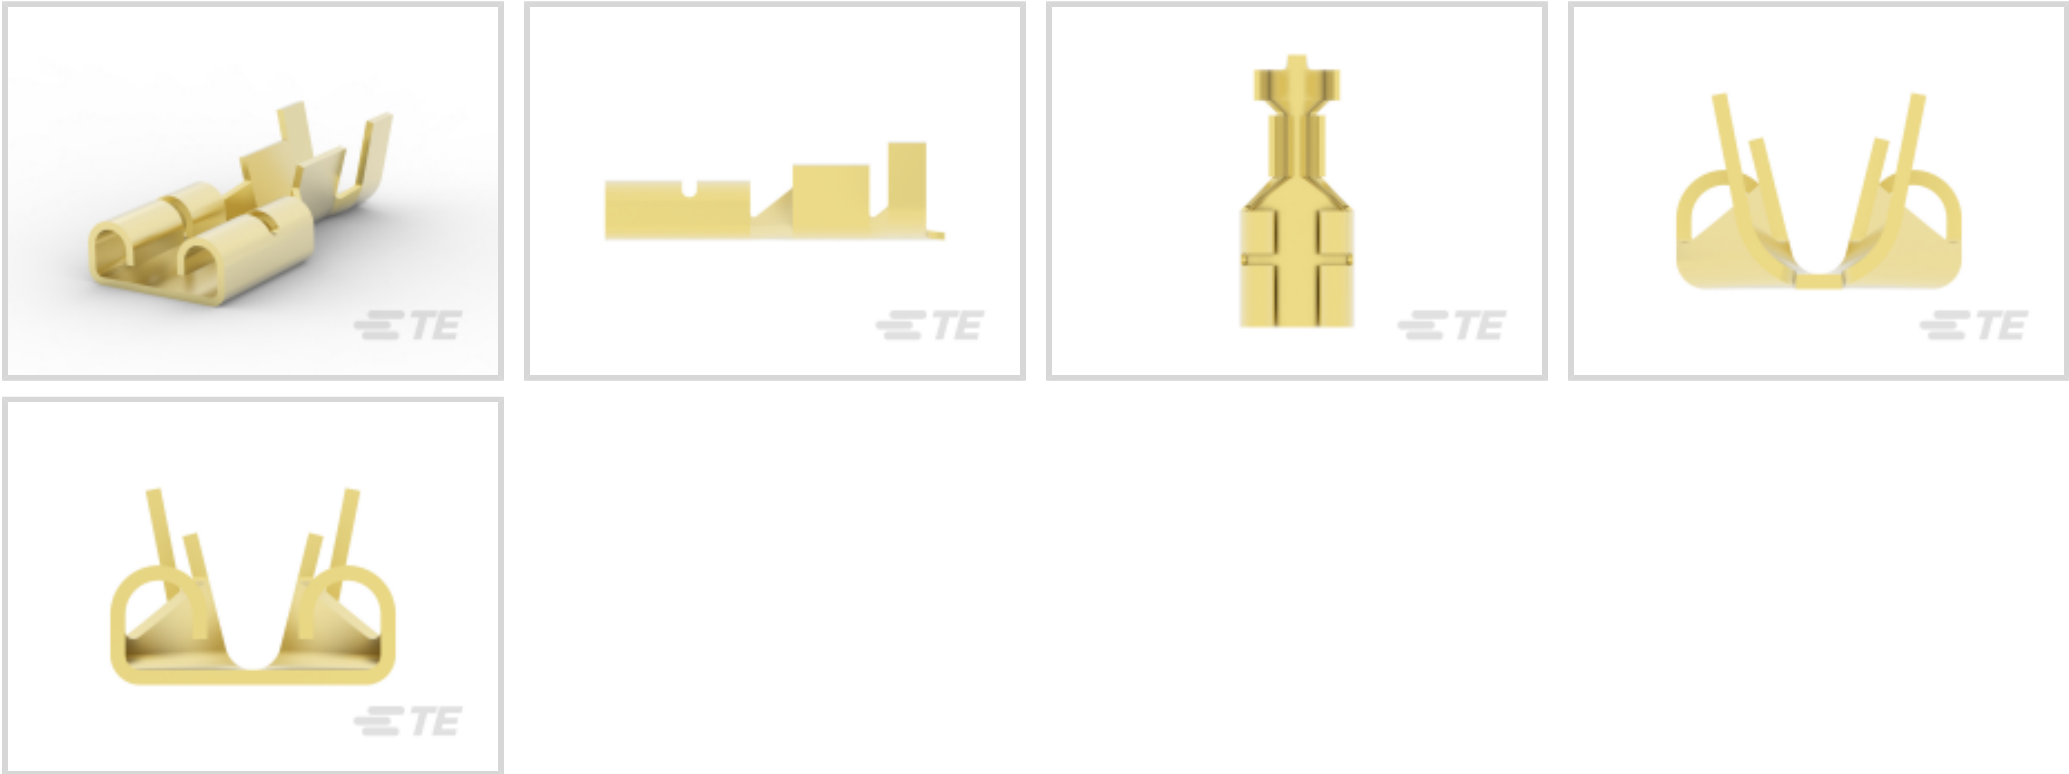




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1 - 2.5 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------



Mechanical Attachment

Extraction Force	20 - 70 Newton
Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	17.2 mm[.677 in]
Compatible Insulation Diameter Range	3 - 4.3 mm[.118 - .169 in]
Wire Size	1 - 2.5 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	10000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability




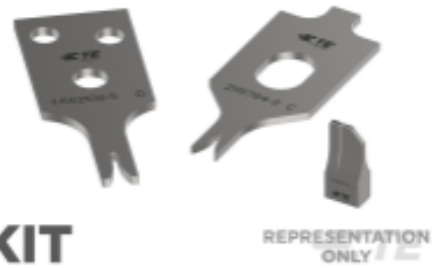
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

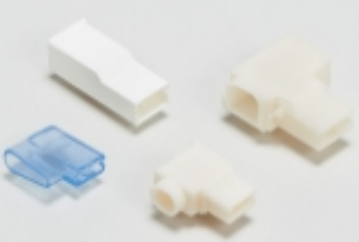


EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 444334-3 250 FASTON REC 22-18 AWG BR	 TE Part # 444334-2 250 FASTON REC 22-18 AWG TPBR	 TE Part # 2150004-1 OCEAN_2.0_Applicator-E-110F180F-REM	 TE Part # 2150004-2 OCEAN_2.0_Applicator-E-110F180F-REA
 KIT TE Part # 7-2150004-7 OCEAN_2.0_SPARE_PART_KIT-110F180F	 TE Part # 7-2150004-1 OCEAN_2.0_Applicator-E-110F180F	 TE Part # 7-2150004-2 OCEAN_2.0_Applicator-E-110F180F	 KIT TE Part # 7-1893897-1 KIT FOR APPLICATOR

Also in the Series | FASTON 250

 Compression Connectors(4)	 Crimp Terminal Housings(133)	 Insertion & Extraction Tools(6)	 Magnet Wire Terminals(1)
 PCB Terminals(134)	 Quick Disconnects(441)	 Splices(4)	



Customers Also Bought



TE Part # 368576-1
PDL 6P PLUG 3.96 D/R(GWT) NAT



TE Part # 1971600-1
POWER DBL LOCK CAP HSG 8P(GWT)



TE Part # 2005253-1
PDL 6P CAP 3.96 D/R F/H(GWT) N



TE Part # 8-735075-0
250 FASTON HSG. REC. 1P NATURAL



TE Part # 1-2133346-4
250 FASTON HSG.,REC.,1 POS,BLACK



TE Part # 1-881623-1
FASTON 187 REC 0.5-1.0MM2 0.32X13.97 BR



TE Part # 2-2133394-1
187 FASTON HSG.,REC.,1 POS, NATRUAL



TE Part # 626279-2
RING TONGUE 0.5-1.50 MM2 TPBR

Documents

Product Drawings

250 FASTON REC 16-14 AWG BR

English

CAD Files

Customer View Model

ENG_CVM_CVM_444335-3_J1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_444335-3_J1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_444335-3_J1.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

EB**General Application Specification for Open Barrel Terminals

English

Application Specification

English

Agency Approvals

Agency Approval Document

444335-3

Quick Disconnects, Receptacle, 16 - 14 AWG Wire Size, 1 - 2.5 mm² Wire Size, Mating
Tab Width 6.35 mm [.25 in], Straight, Brass, FASTON 250



English