




Connectors > RF Connectors > RF Terminators

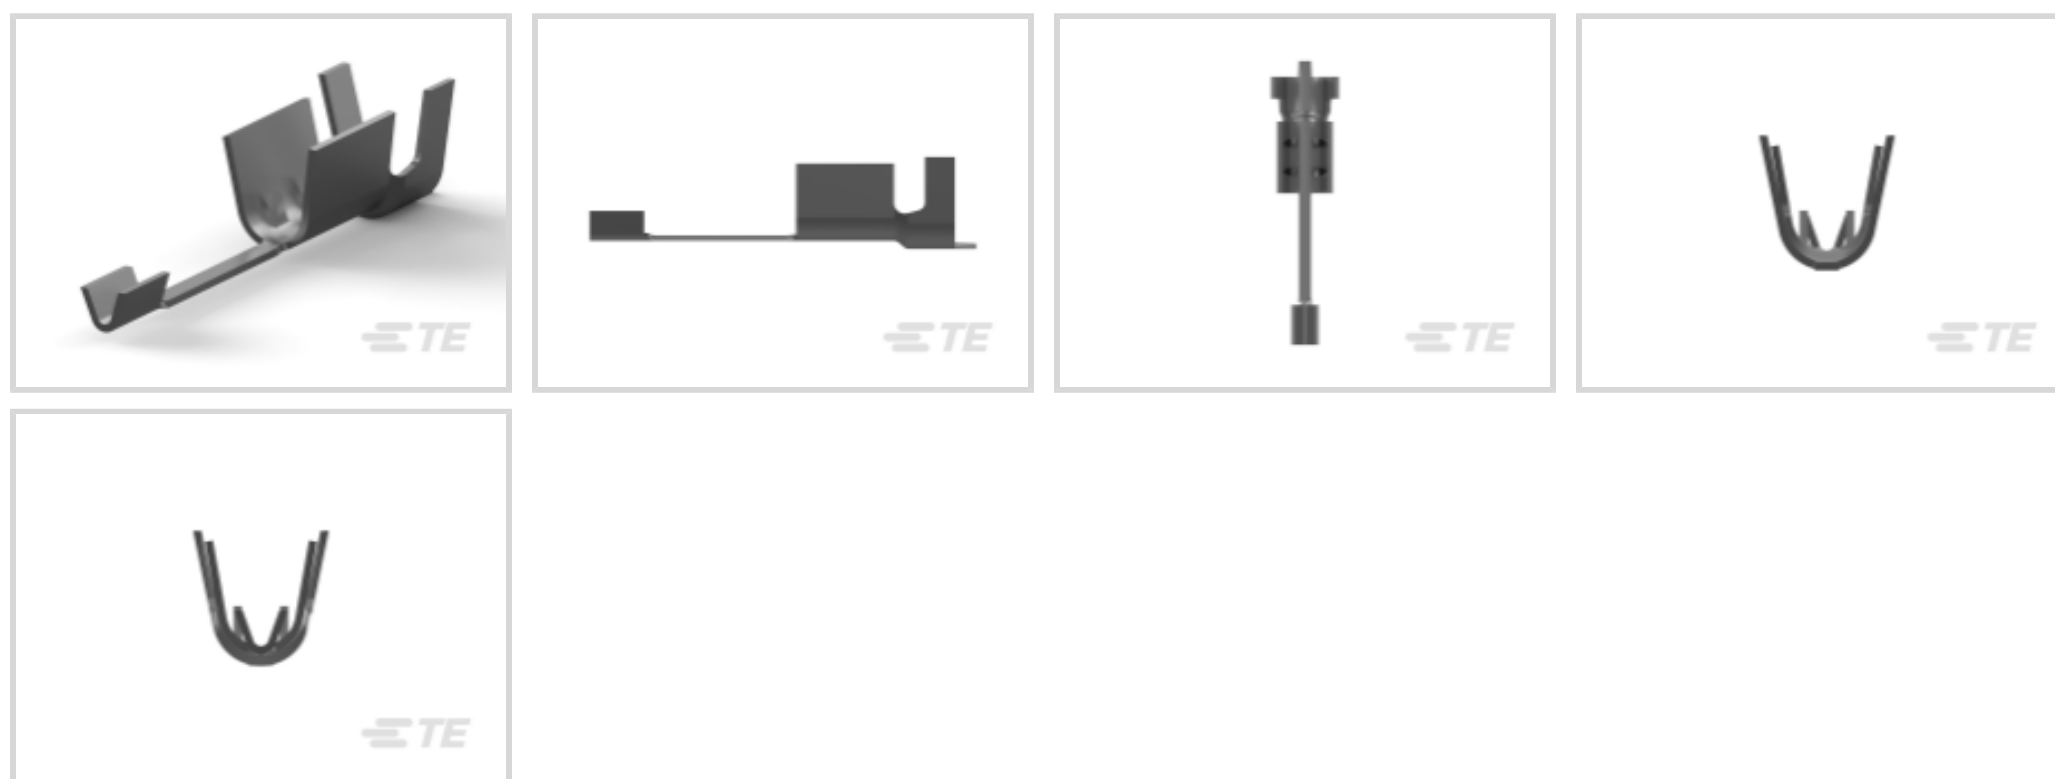

Operating Temperature Range: -55 - 80 °C [-67 - 176 °F]

### Features

#### Body Features

Body Plating Material	Tin
Body Material	Brass

#### Contact Features

RF Connector Center Contact Plating Material	Tin-Lead
Crimp Type	Braid & Center Conductor Termination
RF Connector Center Contact Material	Brass
Contact Current Rating (Max)	1 A

#### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-55 - 80 °C[-67 - 176 °F]

#### Operation/Application

Circuit Application	Signal
---------------------	--------

#### Packaging Features

Packaging Method	Strip
------------------	-------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
------------------------------	---------------



EU ELV Directive 2000/53/EC

Not Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024 (240)  
 Candidate List Declared Against: JAN 2024 (240)  
 SVHC > Threshold:  
 Pb (40% in Component Part)

**Article Safe Usage Statements:**  
 Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Customers Also Bought



TE Part # 1757820-7  
 AMPLIMITE,ASY,RCPT,STD,109,ZN,2,CT



TE Part # 205559-2  
 RECEPT ASSY,25 POSN,AMPLIMITE



TE Part # 1-1625812-2  
 3631B 47UH 15% FIO



TE Part # 7-2176089-2  
 RP 1J 0.166W 63K4 0.1% 25PPM 1K RL



TE Part # 9-2176088-6  
 RP 1J 0.166W 8K87 0.1% 25PPM 1K RL



TE Part # 2176339-7  
 CRGCQ 0603 33R 1%



TE Part # 443975-2  
 AMPLIMITE,RCPT ASY,POSTD,109,2



TE Part # 1987328-1  
 RJ45 COMMON CORE, 4x2 POS.



## Documents

### Product Drawings

#### COAX PCB PICK TYPE TERMIN

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_226177-2\\_AH.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_226177-2\\_AH.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_226177-2\\_AH.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

#### Product Specification

English

#### COAXICON PC Board Contact (Permanent Mound, Pick Type)

English

### Instruction Sheets

#### Instruction Sheet (U.S.)

English

#### AMP\* BRAID-PIC TERMINALS FOR PRINTED CIRCUIT BOARD APPLICATIONS

English