
FLYER

DM3NW Series

Height 1.15mm

Push-Push, Ultra Low Profile, micro SD™ Card Connector

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

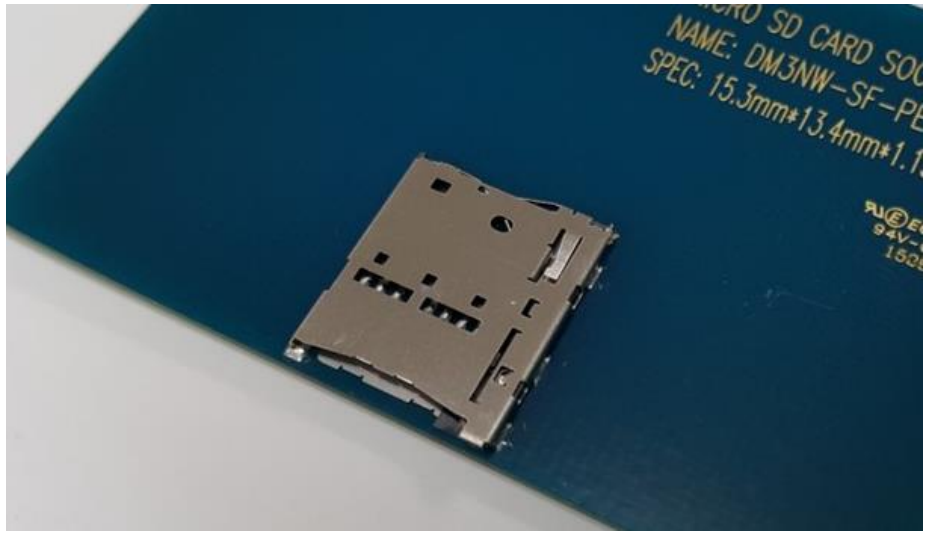

Features


1. **Ultra Low profile 1.15mm height**
2. **Prevents incorrect card insertion**
3. **Excellent card lock mechanism**
4. **Prevents mis card insertion**
5. **Card detection switch (Normally close)**

micro SD™ | Push / Push | Ultra Low Profile


The world 's lowest profile in its Class 1.15 mm*

* As push-push type micro SD™ connector as of June 2016.


Dimensions

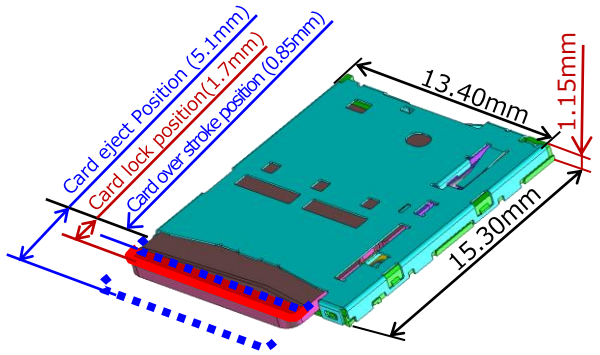

Prevents card jamming if nano SIM inserted



Easy to remove the card when accidentally inserted

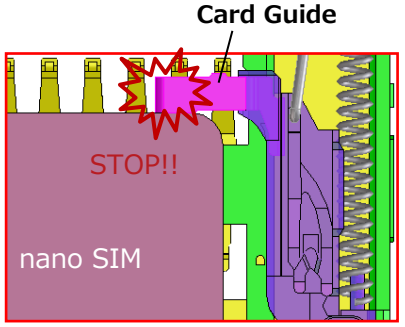

Specifications

Rated Current	0.5A
Rated Voltage	10V AC
Operating Temperature	-30℃ to +85℃
Contact Resistance	60mΩ Max. (Signal) 200mΩ Max.(Detection)
Withstanding Voltage	500V AC for 1 minute
Insulation Resistance	1,000MΩ Min. (500V DC)
Mating Durability	10,000 times

・RoHS compliant, Halogen-free product*

*This product satisfies halogen free requirements defined as 900ppm maximum chlorine.900ppm maximum bromine, and 1,500ppm maximum total of chlorine and bromine

※ Please contact Hirose's sales representative prior to adopting the products to in-vehicle devices.

HIROSE ELECTRIC CO.,LTD.

EN_F_DM3NW_1_16-9, Feb. 5, 2018 ©2018 HIROSE ELECTRIC CO., LTD. All rights reserved. Specifications herein are subject to change without notice. Contact Hirose for the latest specifications, drawings, and availabilities.