


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

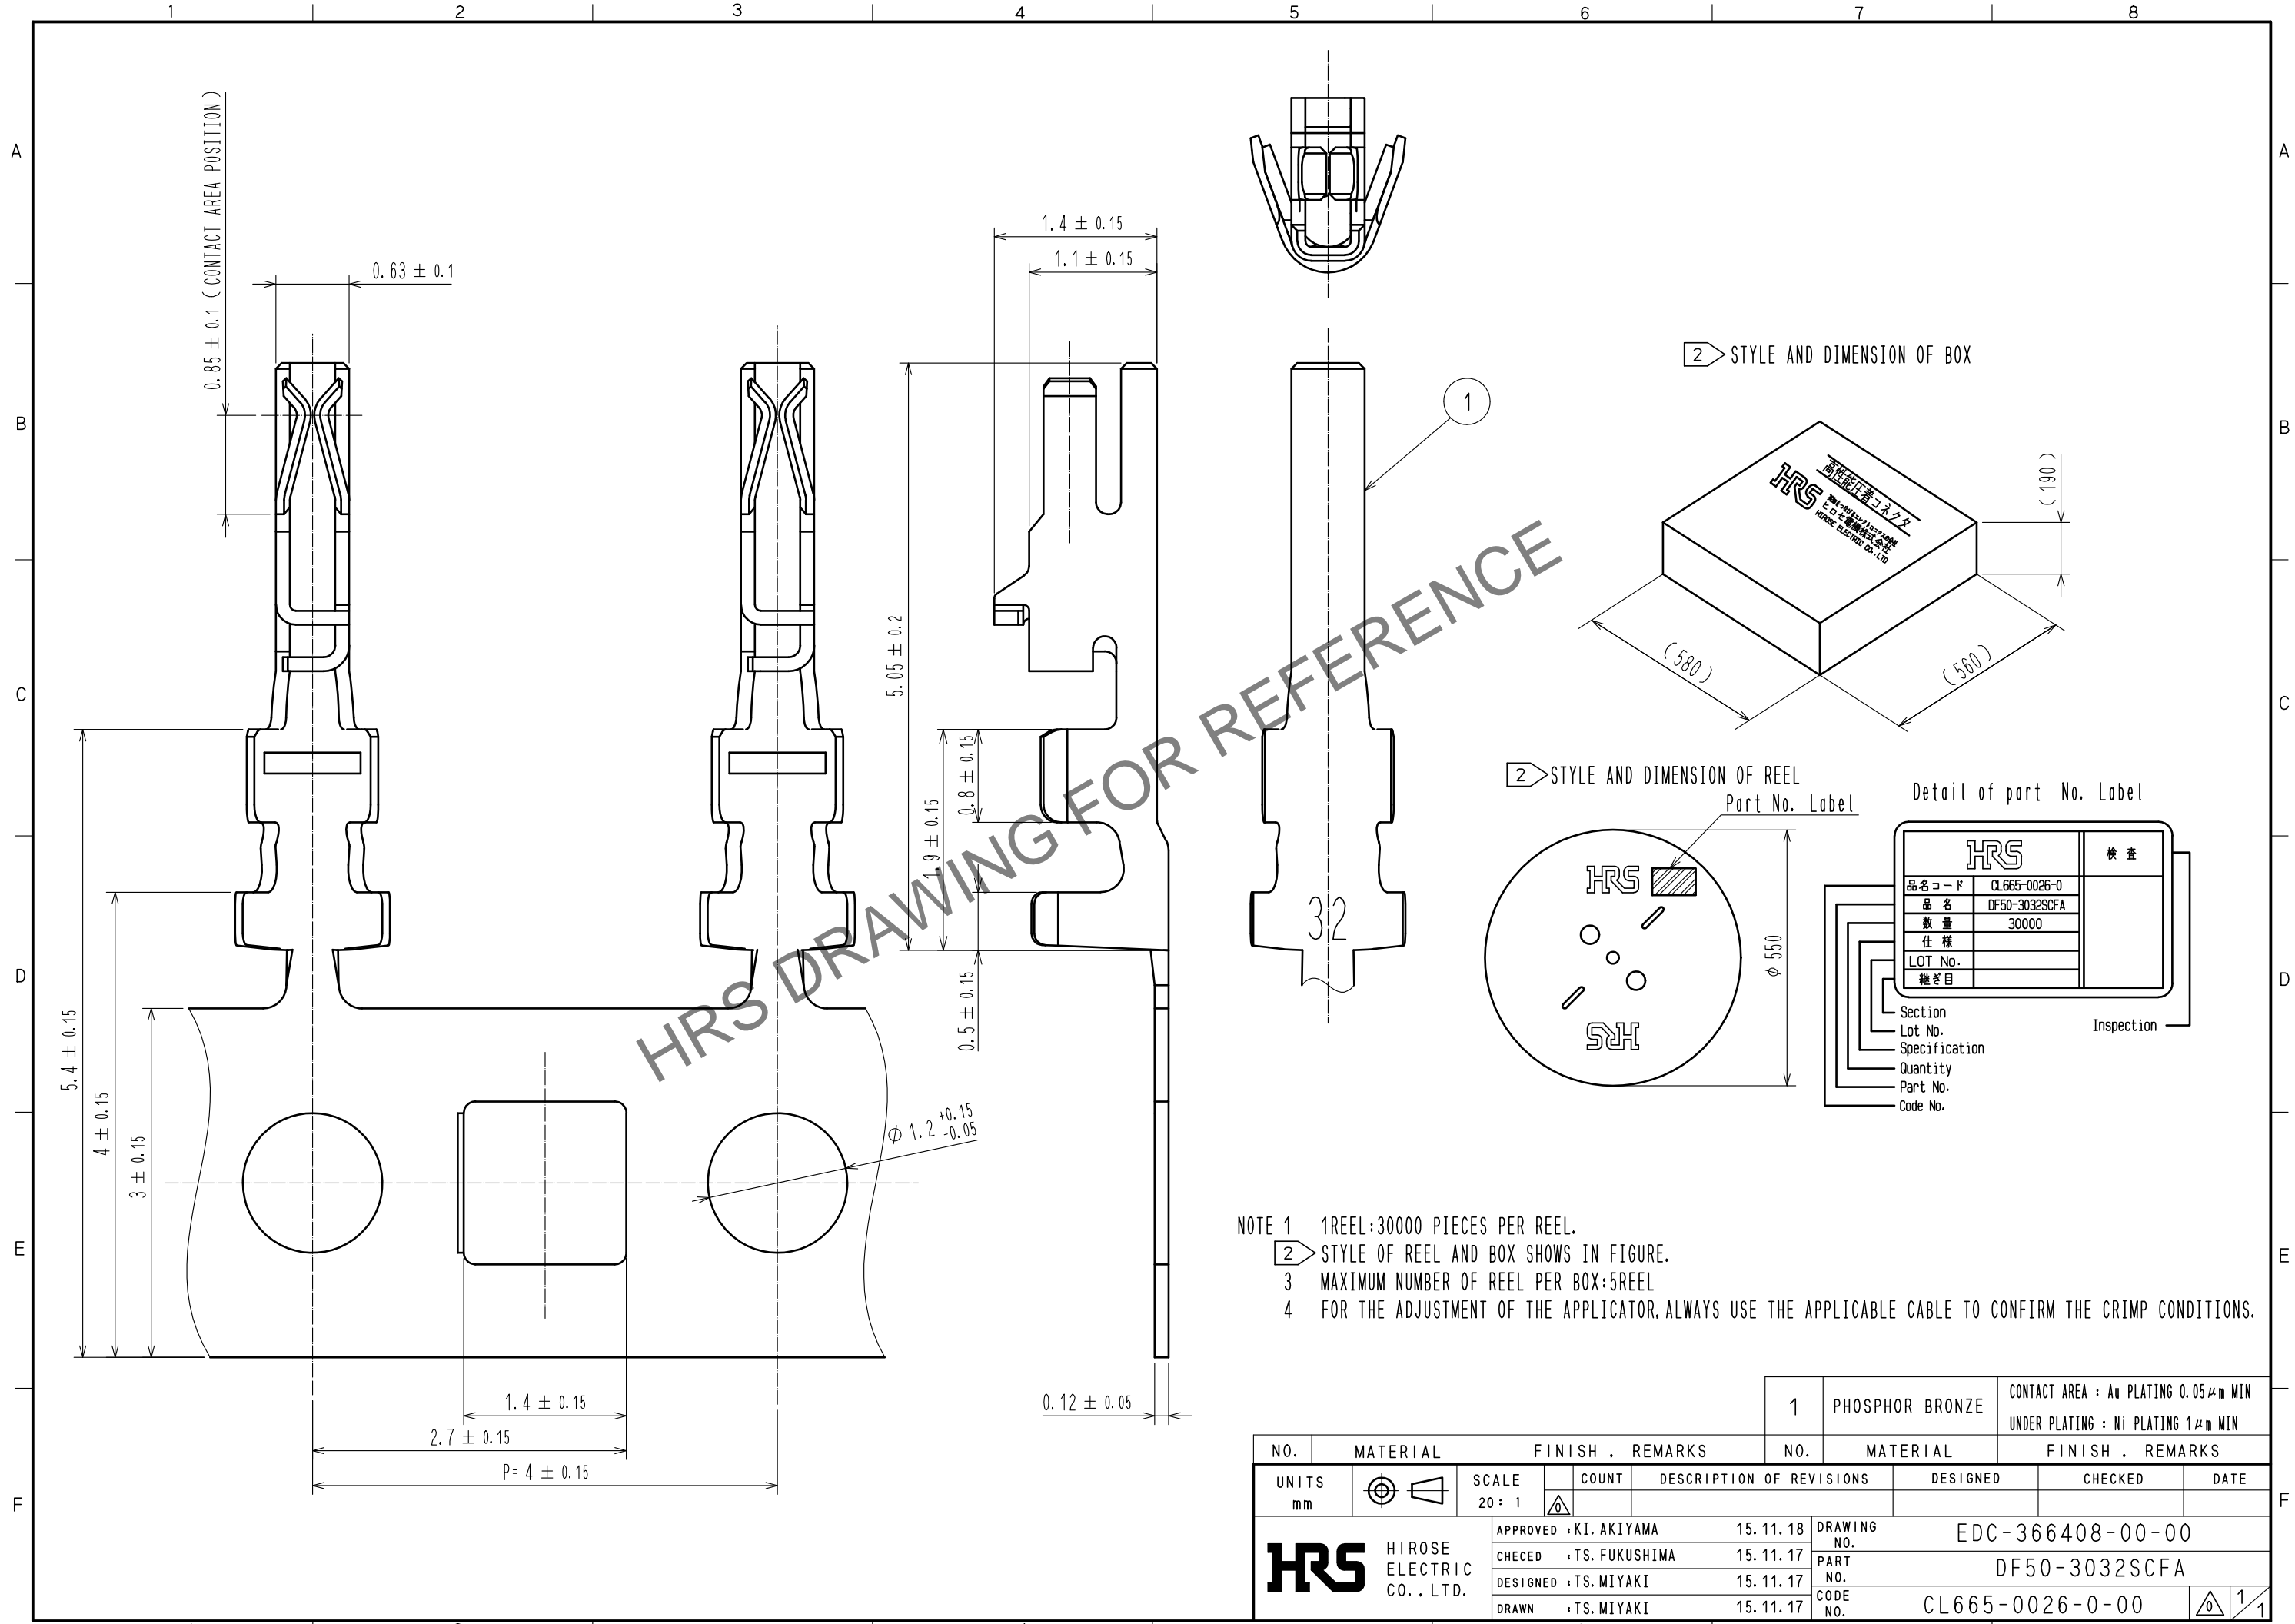

NOTE 1 1REEL:30000 PIECES PER REEL.
 2 STYLE OF REEL AND BOX SHOWS IN FIGURE.
 3 MAXIMUM NUMBER OF REEL PER BOX:5REEL
 4 FOR THE ADJUSTMENT OF THE APPLICATOR, ALWAYS USE THE APPLICABLE CABLE TO CONFIRM THE CRIMP CONDITIONS.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.05 μ m MIN UNDER PLATING : Ni PLATING 1 μ m MIN			

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	20 : 1					
APPROVED : KI. AKIYAMA			15.11.18	DRAWING NO. EDC-366408-00-00		
CHECKED : TS. FUKUSHIMA			15.11.17	PART NO. DF50-3032SCFA		
DESIGNED : TS. MIYAKI			15.11.17	CODE NO. CL665-0026-0-00		
DRAWN : TS. MIYAKI			15.11.17	1/1		