High Voltage Standard Rectifier

V_{RRM}	=	2200 V
I_{FAV}	=	30 A
V_F	=	1.24 V

Single Diode

Part number

DNA30E2200PA

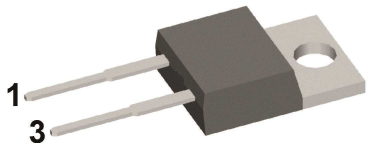

Backside: anode



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very low forward voltage drop
- Improved thermal behaviour

Applications:

- Diode for main rectification
- For single and three phase bridge configurations

Package: TO-220

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

© 2019 IXYS all rights reserved

Rectifier				Ratings			
Symbol	**Definition**	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
V_{RSM}	*max. non-repetitive reverse blocking voltage*		T_{VJ} = 25°C			2300	V
V_{RRM}	*max. repetitive reverse blocking voltage*		T_{VJ} = 25°C			2200	V
I_R	*reverse current*	V_R = 2200 V	T_{VJ} = 25°C			40	µA
		V_R = 2200 V	T_{VJ} = 150°C			1.5	mA
V_F	*forward voltage drop*	I_F = 30 A	T_{VJ} = 25°C			1.26	V
		I_F = 60 A				1.53	V
		I_F = 30 A	T_{VJ} = 150°C			1.24	V
		I_F = 60 A				1.63	V
I_{FAV}	*average forward current*	T_C = 140°C	T_{VJ} = 175°C			30	A
		rectangular d = 0.5					
V_{F0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 175°C			0.83	V
r_F	*slope resistance*					13.4	mΩ
R_{thJC}	*thermal resistance junction to case*					0.7	K/W
R_{thCH}	*thermal resistance case to heatsink*				0.5		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			210	W
I_{FSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			370	A
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			400	A
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			315	A
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			340	A
I^2t	*value for fusing*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			685	A^2s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			665	A^2s
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			495	A^2s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			480	A^2s
C_J	*junction capacitance*	V_R = 700 V; f = 1 MHz	T_{VJ} = 25°C		7		pF

© 2019 IXYS all rights reserved

Package TO-220			Ratings			
Symbol	**Definition**	**Conditions**	**min.**	**typ.**	**max.**	**Unit**
I_{RMS}	*RMS current*	per terminal			35	A
T_{VJ}	*virtual junction temperature*		-55		175	°C
T_{op}	*operation temperature*		-55		150	°C
T_{stg}	*storage temperature*		-55		150	°C
Weight				2		g
M_D	*mounting torque*		0.4		0.6	Nm
F_C	*mounting force with clip*		20		60	N

Product Marking

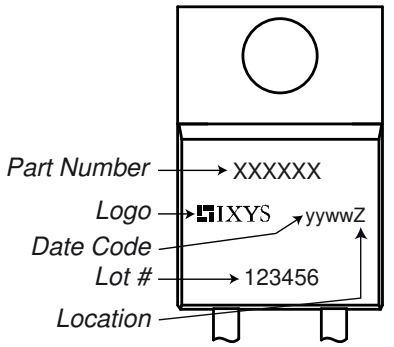

Part description

D = Diode
N = High Voltage Standard Rectifier
A = (>= 2000V)
30 = Current Rating [A]
E = Single Diode
2200 = Reverse Voltage [V]
PA = TO-220AC (2)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DNA30E2200PA	DNA30E2200PA	Tube	50	507762

Similar Part	Package	Voltage class
DNA30E2200PZ	TO-263AB (D2Pak) (2HV)	2200
DNA30EM2200PZ	TO-263AB (D2Pak) (2HV)	2200
DNA30E2200FE	i4-Pac (2HV)	2200
DNA30E2200IY	TO-262 (2HV) (I2PAK)	2200

Equivalent Circuits for Simulation

** on die level* $T_{VJ} = 175°C$



Rectifier

$V_{0\,max}$	*threshold voltage*	0.83	V
$R_{0\,max}$	*slope resistance **	10.2	mΩ

© 2019 IXYS all rights reserved

Outlines TO-220

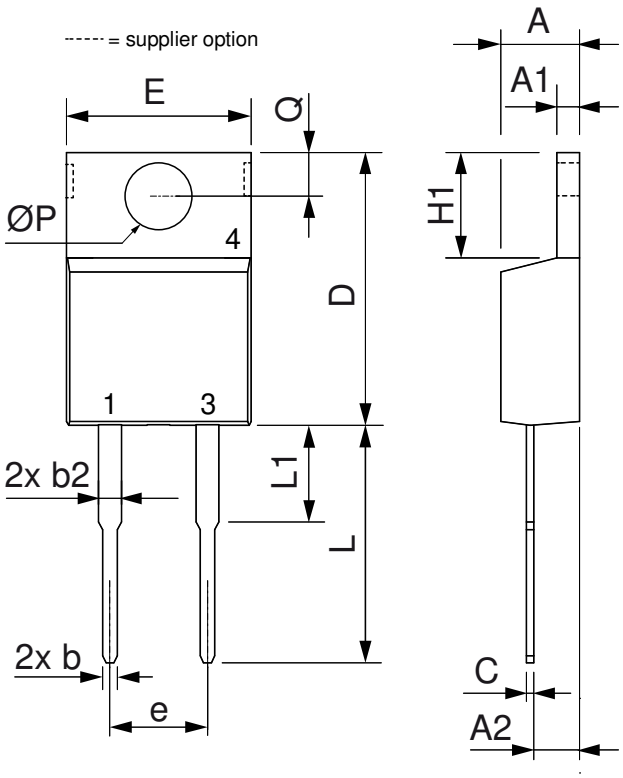

Dim.	Millimeter Min.	Millimeter Max.	Inches Min.	Inches Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	5.08	BSC	0.200	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
ØP	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125



© 2019 IXYS all rights reserved

Rectifier

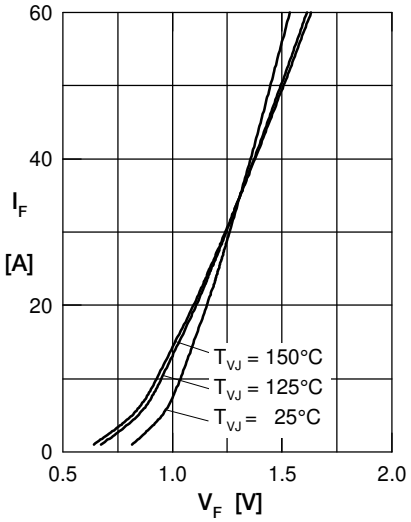

Fig. 1 Forward current versus voltage drop per diode

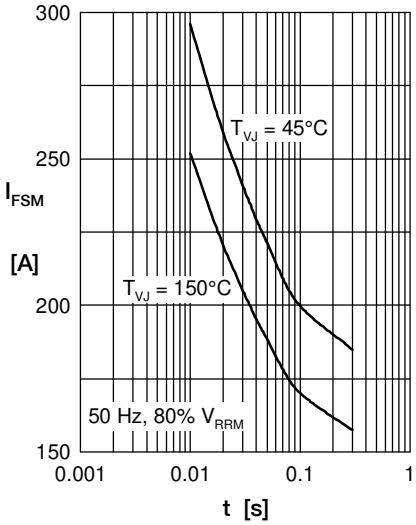

Fig. 2 Surge overload current

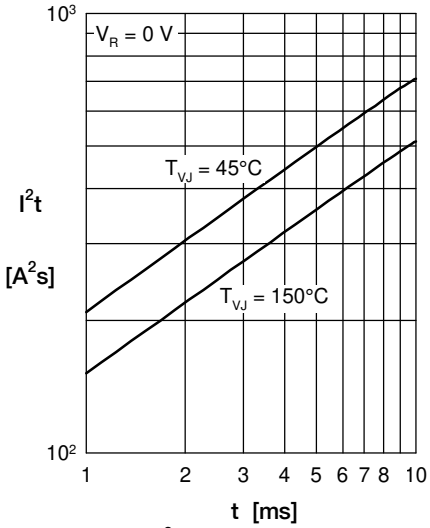

Fig. 3 I^2t versus time per diode

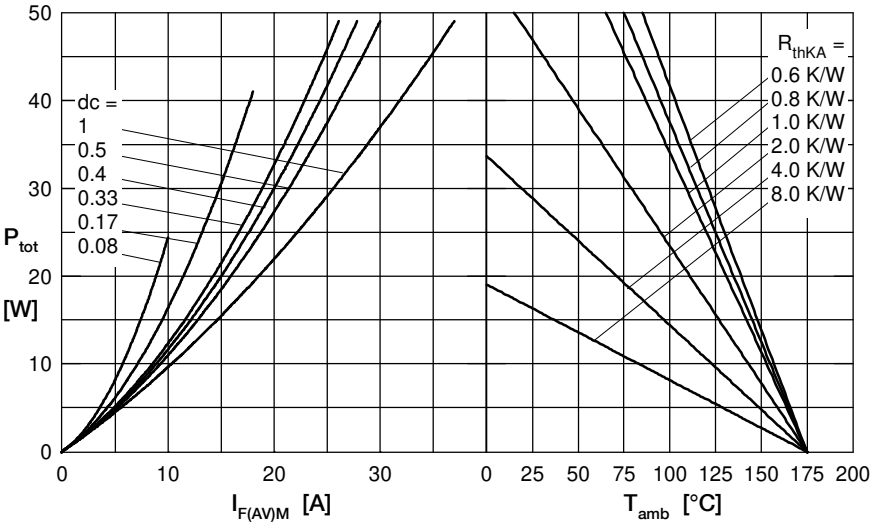

Fig. 4 Power dissipation versus direct output current and ambient temperature

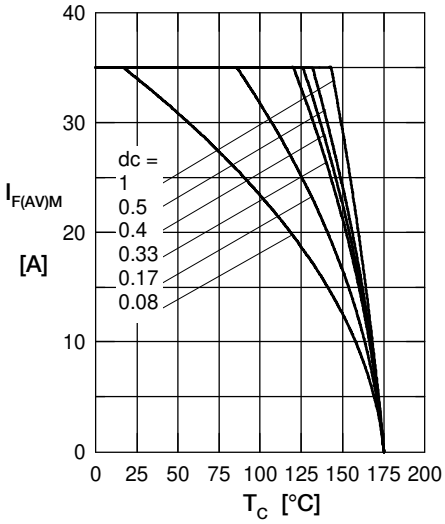

Fig. 5 Max. forward current versus case temperature

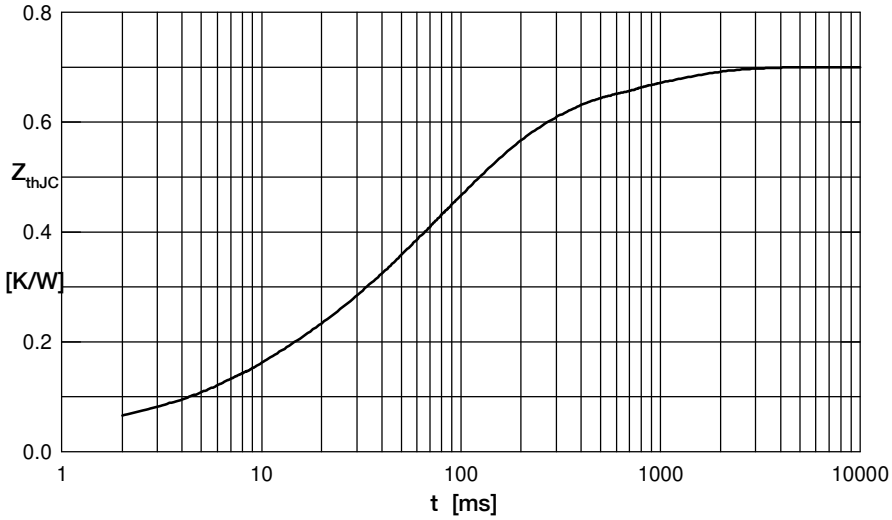

Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.03	0.0003
2	0.072	0.0065
3	0.131	0.027
4	0.367	0.105
5	0.1	0.8

© 2019 IXYS all rights reserved