



Mini-CT

TE Internal #: 2058943-5
MINI-CT Pigtail Cable Assembly, 6 Position, .521 ft [.159 m],
Operating Voltage 70 VAC, Operating Voltage 70 VDC, MINI-CT
Receptacle, White End A

[View on TE.com >](#)

Cable Assemblies > Copper Cable Assemblies > Lighting Cable Assemblies



Wire Color (Base): Red, Black, Blue, Orange, Yellow, White
Cable Assembly Length: .159 m [.521 ft]
Connector Type (End A): MINI-CT Receptacle
Number of Positions: 6
Cable Assembly Type: MINI-CT Pigtail

Features

Product Type Features

Sealable	No
Connector System	Wire-to-Board
Connector Type (End A)	MINI-CT Receptacle
Cable Assembly Type	MINI-CT Pigtail

Configuration Features

Number of Rows	1
Number of Positions	6

Electrical Characteristics

Operating Voltage	70 VDC
-------------------	--------

Body Features

Wire Color (Base)	Red, Black, Blue, Orange, Yellow, White
Connector Color (End A)	White

Contact Features

Contact Type	Socket
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	3 A



Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
Mating Retention Type	Locking Latch

Housing Features

Housing Material	Nylon
Centerline (Pitch)	1.5 mm[.059 in]

Dimensions

Connector Length	6.9 mm
Outside Cable Diameter	1.12 mm
Connector Height	4.7 mm
Connector Width	15.11 mm
Compatible Insulation Diameter Range	.7 - 1.03 mm[.027 - .04 in]
Wire Size	.205 mm ²

Usage Conditions

Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Bag/Box
------------------	---------

Other

Cable Assembly Length	.159 m[.521 ft]
-----------------------	-----------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 292206-6
MINI CT SGL DIP H 6P NAT



TE Part # 2106091-5
6 pos Inverted Thru Board SMT Header



TE Part # 292227-6
1.5 MINI CT SGL H SMT W BOSS 6

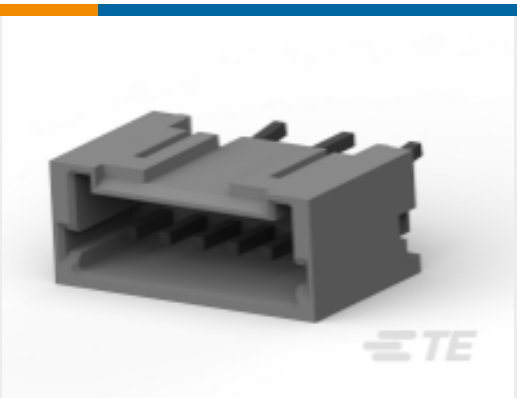

TE Part # 292207-6
MINI CT SGL DIP V 6P NAT



TE Part # 292228-6
1.5 MINI CT SGL H SMT W/O BOSS



TE Part # 1903108-1
MINI CT CABLE ASSY 3P REC GOLD PLT.

Also in the Series | Mini-CT




Connector Contacts(1)



Connector Hardware(10)



Lighting Cable Assemblies(2)

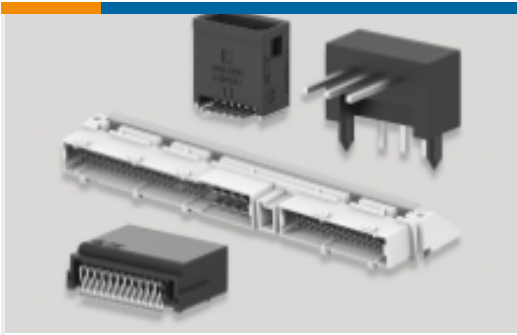

PCB Headers & Receptacles(9)



Rectangular Power Connectors(1)

Customers Also Bought



TE Part # MS580302BA01-00
MS5803-02BA01 DIGIT PRESSURE
SENSOR TUBE



TE Part # 5745173-4
CABLE CLAMP KIT,SZ 3



TE Part # 103308-5
020 LOPRO HDR SP 15DP



TE Part # 1-1825136-4
A101MD9AQ04



TE Part # 34852
TERMINAL,PG R 12-10 6




TE Part # 170203-2
187 FASTON,REC.,24-20 AWG,TPBR



TE Part # 292207-2
MINI CT SGL DIP V 2P NAT



TE Part # 292207-5
MINI CT SGL DIP V 5P NAT

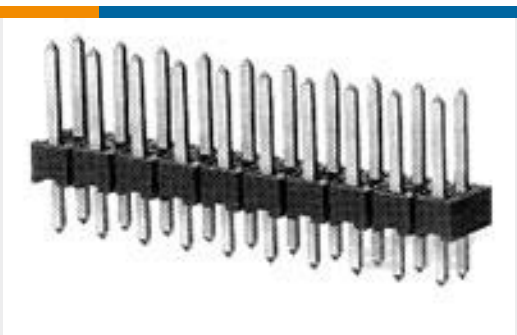

TE Part # 1-826656-0
10P AMPMODU II STIFT LEI



TE Part # T4112012081-000
M12 F, 8P GOLD A_CODE RA
SHIELDED PG9

Documents



Product Drawings

Cable Assembly Mini CT 6 pos.

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2058943-5_E_c-2058943-5-e.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2058943-5_E_c-2058943-5-e.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2058943-5_E_c-2058943-5-e.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

INVERTED_SMT_THRU_BOARD_CONNECTOR

English

Product Specifications

Application Specification

English