

794954-4 ✓ ACTIVE




VAL-U-LOK

TE Internal #: 794954-4

Rectangular Power Connectors, Housing, Receptacle, Wire-to-Board / Wire-to-Wire, 4 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-2

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

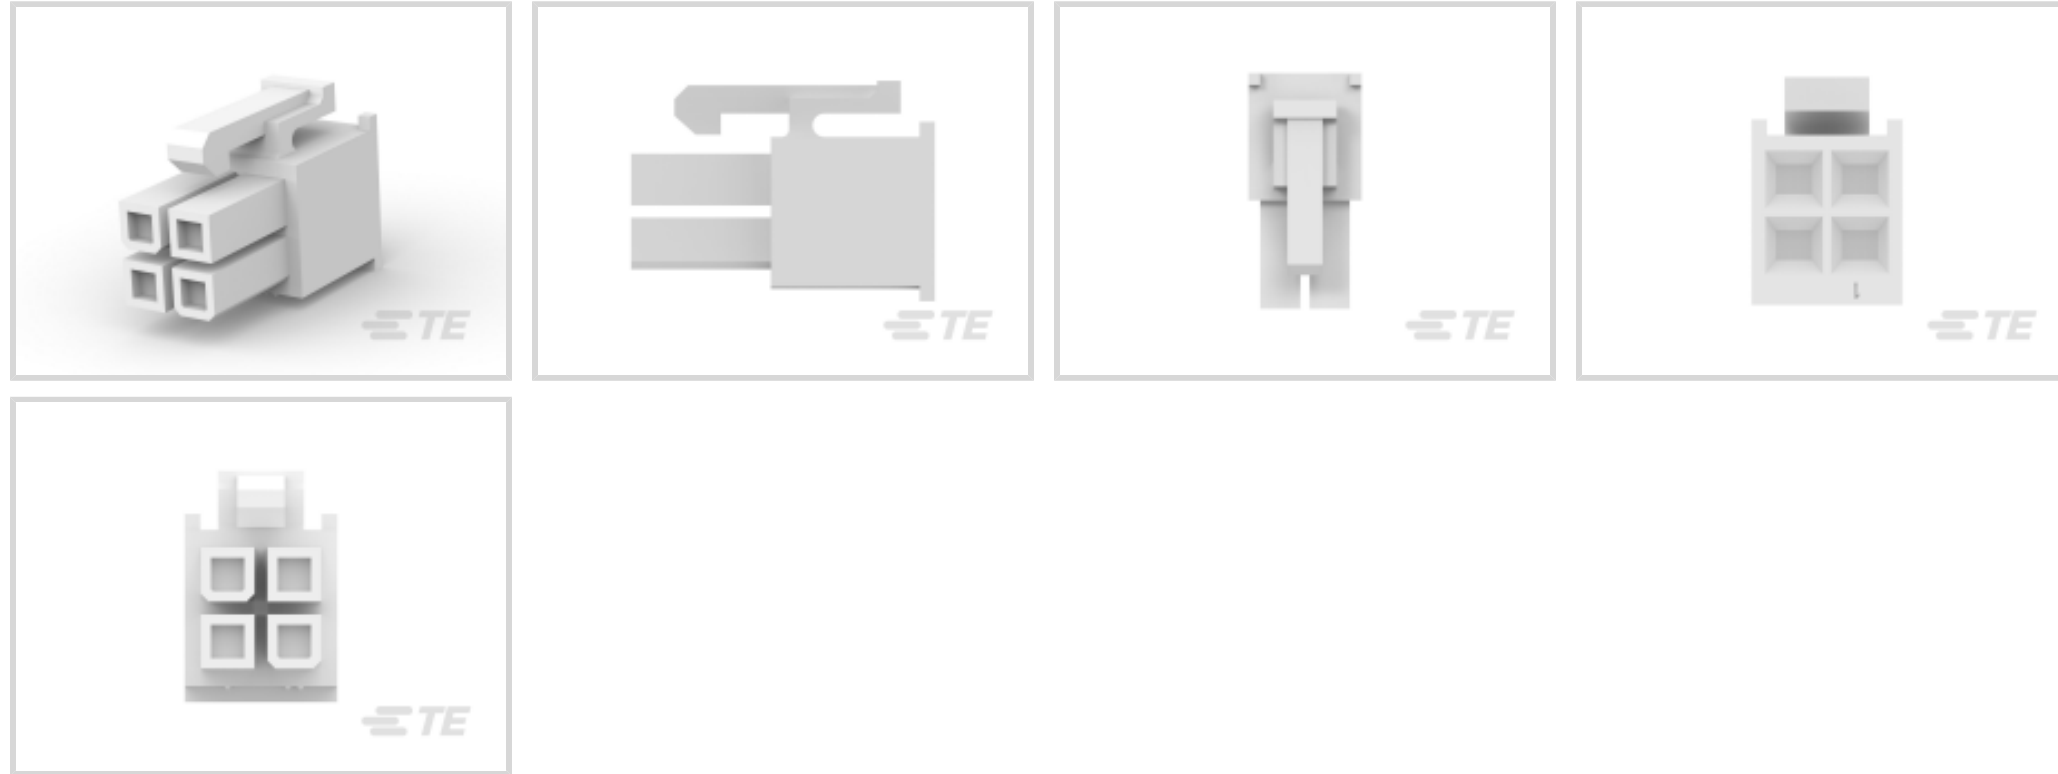

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board, Wire-to-Wire**

Number of Positions: **4**

Centerline (Pitch): **4.2 mm [.165 in]**

**Features**

**Product Type Features**

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

**Configuration Features**

Insertion Force	15 Newton
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	4
Number of Rows	2

**Electrical Characteristics**

Operating Voltage	600 VAC
-------------------	---------

**Contact Features**

Multiple Contact Types	Without
------------------------	---------



Contact Layout	Matrix, Square Grid
----------------	---------------------

Contact Retention Within Housing	Without
----------------------------------	---------

Contact Type	Receptacle
--------------	------------

### Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

### Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

### Housing Features

Centerline (Pitch)	4.2 mm [.165 in]
--------------------	------------------

Housing Color	Natural
---------------	---------

Housing Material	Nylon
------------------	-------

### Dimensions

Connector Height	11.8 mm [.464 in]
------------------	-------------------

Product Width	20 mm [.787 in]
---------------	-----------------

Product Length	9.6 mm [.378 in]
----------------	------------------

Compatible Insulation Diameter Range	1.2 - 3.1 mm [.047 - .122 in]
--------------------------------------	-------------------------------

Row-to-Row Spacing	4.2 mm [.165 in]
--------------------	------------------

### Usage Conditions

Operating Temperature Range	-40 - 105 °C [-40 - 221 °F]
-----------------------------	-----------------------------

### Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

### Identification Marking

Circuit Identification Feature	With
--------------------------------	------

### Industry Standards

CSA Rating	208567
------------	--------

UL Rating	Recognized
-----------	------------

Compatible With Agency/Standards Products	CSA, UL
---	---------

Compatible With Approved Standards Products	UL E28476
---	-----------

UL Flammability Rating	UL 94V-2
------------------------	----------

Glow Wire Rating	Standard Part - Not Glow Wire
------------------	-------------------------------

### Packaging Features



Packaging Quantity	500
Packaging Method	Bag

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts


 <p>TE Part # 1586000-4 4P FH PLUG VAL-U-LOK V2</p>	 <p>TE Part # 794953-4 4P PM PLUG VAL-U-LOK V2</p>	 <p>TE Part # 1586039-4 4P VAL-U-LOK VRT HDR W/P V2</p>	 <p>TE Part # 1586037-4 4P VERT HDR VAL-U-LOK V2</p>
--	---	--	---




TE Part # 1586041-4  
4P VAL-U-LOK R/A HDR V2



TE Part # 1586586-4  
4P VAL-U-LOK BMI VRT HDR V2

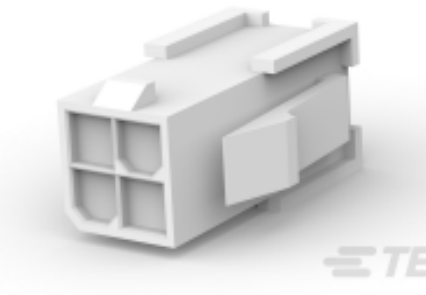


TE Part # 1969599-4  
4P PM PLUG VAL-U-LOK V2



TE Part # 2029100-4  
4P RCPT VAL-U-LOK V0 BLUE



TE Part # 1586043-4  
4P VAL-U-LOK R/A HDR SCR MT V2



TE Part # 794550-4  
04P DUAC PLUG HSG 94V-2 PAN MT



TE Part # 1969598-4  
4P FH PLUG VAL-U-LOK V2



TE Part # 2825272-4  
4P VERT HDR VAL-U-LOK HCS GW




TE Part # 2415884-4  
4P VERT HDR VAL-U-LOK V2


### Customers Also Bought




TE Part # 3-1418483-1  
2POS,AMP MCP2.8,REC. HSG

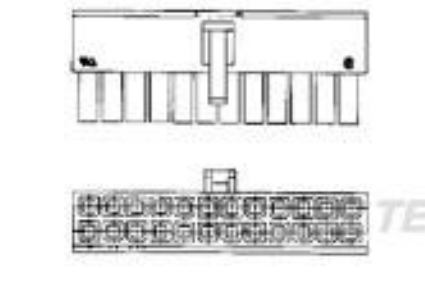


TE Part # 1-794954-0  
10P RCPT VAL-U-LOK V2

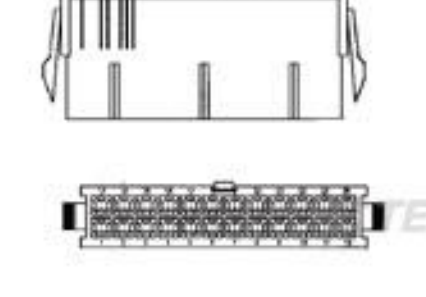


TE Part # 794953-4  
4P PM PLUG VAL-U-LOK V2

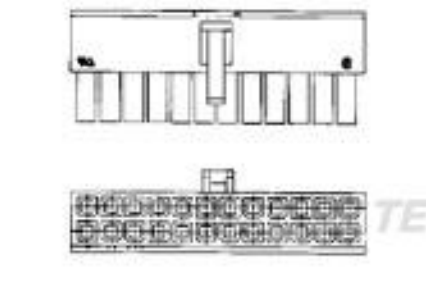


TE Part # 794954-8  
8P RCPT VAL-U-LOK V2

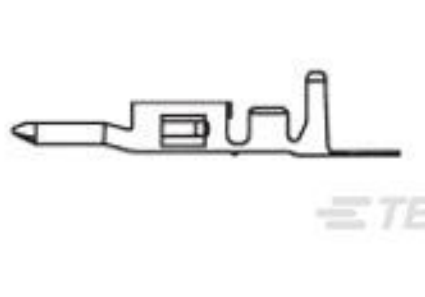

TE Part # 794955-1  
VAL-U-LOK PIN BR SN 22-18AWG

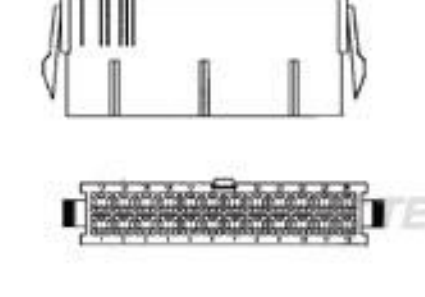


TE Part # 794953-2  
2P PM PLUG VAL-U-LOK V2

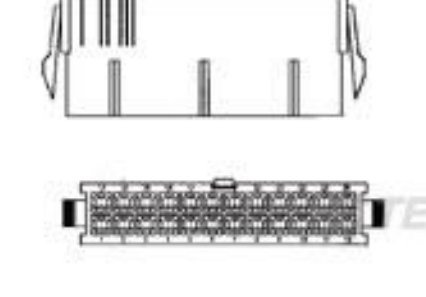

TE Part # 794953-6  
6P PM PLUG VAL-U-LOK V2



TE Part # 2176443-1  
HCF110 100W 6R8 5% LEAD

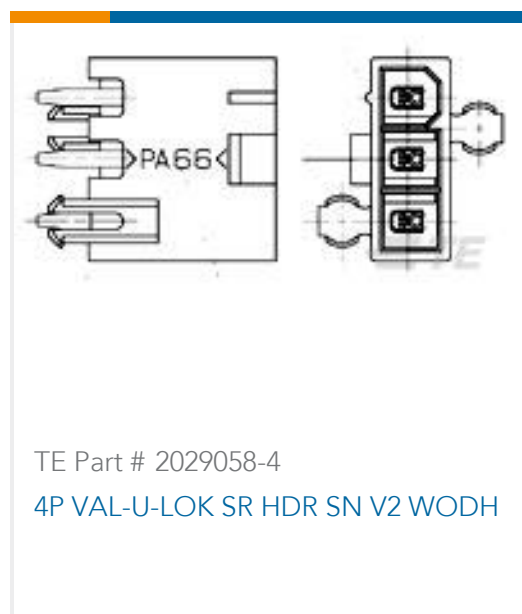

## Documents

### Product Drawings

#### 4P RCPT VAL-U-LOK V2

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_794954-4\\_E.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_794954-4\\_E.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_794954-4\\_E.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### SOFT\_SHELL\_PIN\_AND\_SOCKET\_CONNECTORS\_CATALOG

English

### Product Specifications

#### Application Specification

English

### Agency Approvals

#### UL Report

English