




Terminals & Splices > PCB Terminals

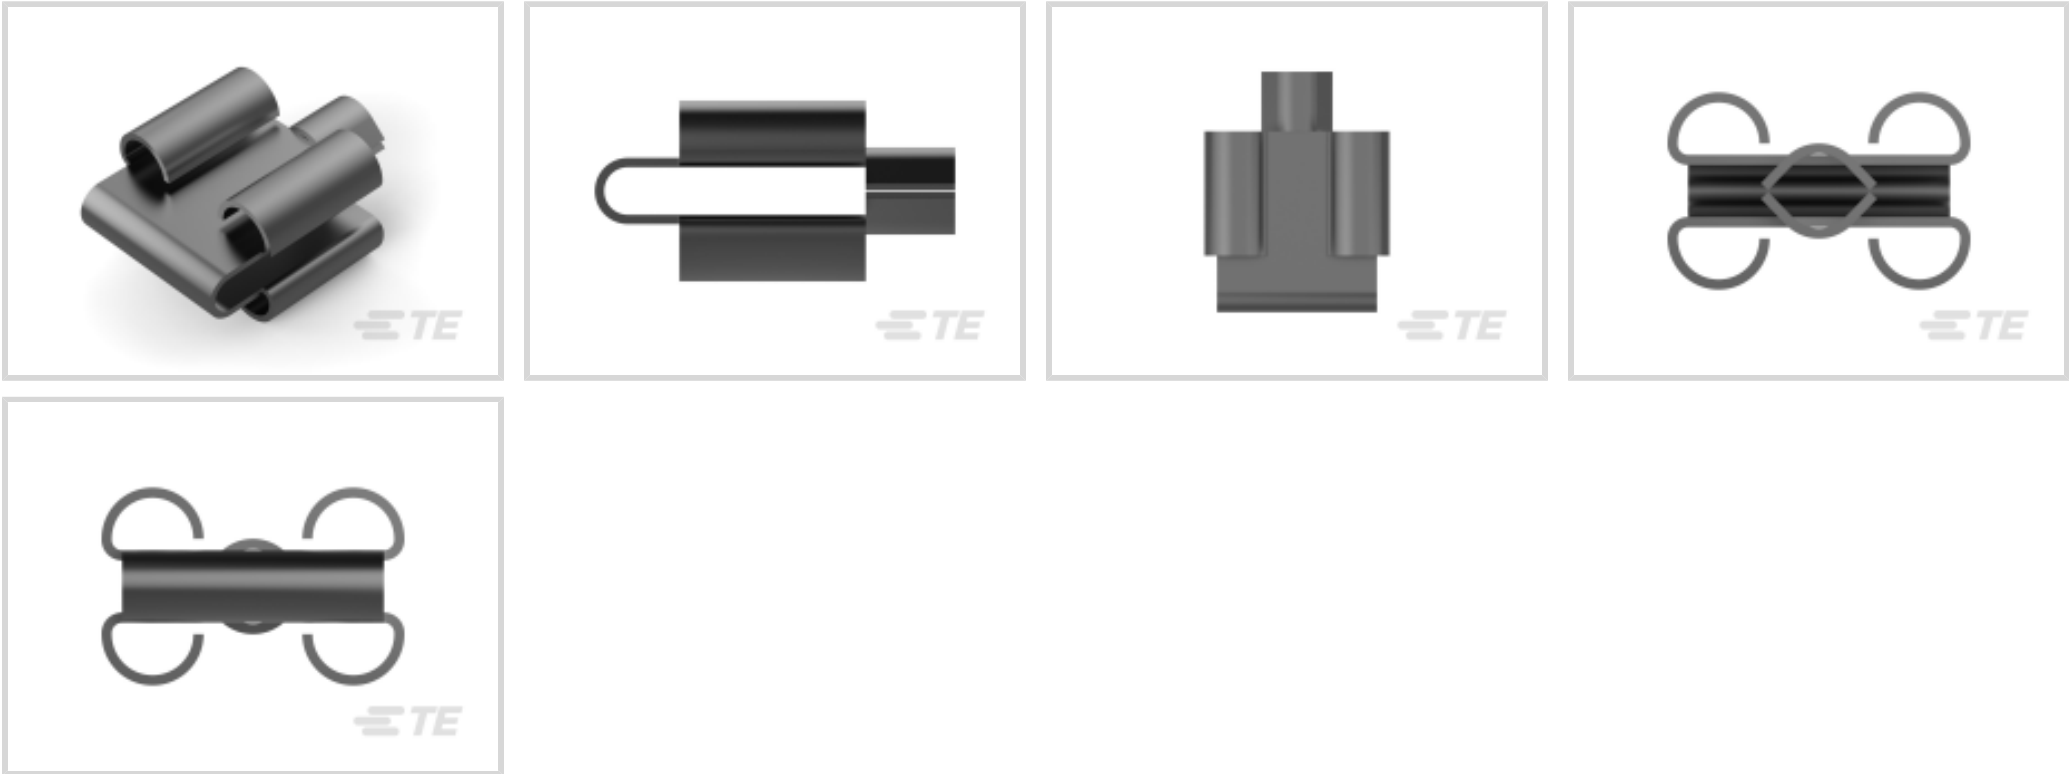

PCB Terminal Type: **Receptacle**

PCB Thickness (Recommended): **1.57 mm [.062 in]**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.41 mm [.016 in]**

PCB Hole Diameter: **2.54 mm [.1 in]**

Features

Configuration Features

Connection Capacity	Multiple
---------------------	----------

Contact Features

PCB Contact Termination Area Plating Material Thickness	2.03 μm[80 μin]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	2.03 μm[80 μin]
PCB Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.41 mm[.016 in]
Terminal Plating Material	Tin
Contact Underplating Material	Brass
Terminal Size	6.35
Terminal Orientation	Straight

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------



Product Terminates To

Printed Circuit Board

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Extension Below Board	3.18 mm[.125 in]
Terminal Material Thickness	.25 mm[.01 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
PCB Hole Diameter	2.54 mm[.1 in]
Profile Height from PCB	7.37 mm[.294 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-30 - 110 °C[-22 - 230 °F]

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 63969-1 FASTON 205/250 PCB MOUNTED TPBR	 TE Part # 1217080-1 FASTON 205/250 PCB MOUNTED TPBR	 TE Part # 1217107-1 250 FASTON,REC.,TPPB	 TE Part # 63968-1 FASTON 205/250 LIF PCB MOUNTED TPBR
 TE Part # 63994-1 FASTON 205/250 PCB MOUNTED TPBR	 TE Part # 1217137-1 FASTON 250/205 REC PCB TPBR	 TE Part # 62751-1 FASTON 250 PCB TAB TPBR	

Also in the Series | FASTON 250

 Compression Connectors(4)	 Crimp Terminal Housings(133)	 Insertion & Extraction Tools(6)	 Magnet Wire Terminals(1)
 PCB Terminals(134)	 Quick Disconnects(441)	 Splices(4)	

Customers Also Bought



TE Part # 5747844-3
09 MSFL RCPT RA 318 (IN,FM,BL)

TE Part # 5-1462037-4
IM41GR=IM RELAY 100mW 3V BIS

TE Part # 3-1393239-6
RT174005

TE Part # 1-329632-2
LOCKWASHER, PLATED

TE Part # 2201778-1
MICRO SD PUSH PUSH LOW PROFILE TYPE

TE Part # 4-640426-1
11P MTA156 CONN ASSY 18AWG ORA

TE Part # 796638-2
2POS 5.08MM CE R/A HDR,TRM BLK

TE Part # 84952-6
1MM FPC HORZ.BTTM CONT.ASS.6P

Documents

Product Drawings

FASTON 250 PCB TAB TPBR

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_62806-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_62806-1_D.3d_stp.zip

English

Customer View Model

ENG_CVM_62806-1_D.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FASTON PCB Tabs and Receptacles

English

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

Product Specifications

Application Specification

English

62806-1

PCB Terminals, Receptacle, Mating Tab Width .25 in [6.35 mm], PCB Hole Diameter 2.54 mm [.1 in], Through Hole - Solder, Tin Plating, Brass, FASTON 250



PC Board Clinchable Receptacle Contacts

English