

TE Internal #: 185226-1
PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Yellow, MQS

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles > Signal Header



Connector System: **Wire-to-Board**
Number of Positions: **26**
Centerline (Pitch): **2.54 mm [.1 in]**
Sealable: **No**
PCB Mount Orientation: **Vertical**

[All Signal Header \(301\)](#)

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Sections	1
Number of Signal Positions	26
Number of Positions	26
PCB Mount Orientation	Vertical
Number of Rows	2

Electrical Characteristics

Nominal Voltage Architecture	12 V
Operating Voltage	12 VDC

Body Features



Primary Product Color	Yellow
Connector & Keying Code	A-E

Contact Features

Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.63 mm[.025 in]
Mating Tab Thickness	.63 mm[.025 in]
Contact Mating Area Plating Material	Tin

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

Mechanical Attachment

Mounting Holes	With
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Locking Interface

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
--------------------	----------------

Dimensions

Connector Length	52.5 mm[2.067 in]
Connector Width	16 mm[.63 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Profile Height from PCB	20.9 mm[.823 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C[149 °F][158 °F][167 °F][176 °F][185 °F]
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]

Operation/Application

Shielded	No
Circuit Application	Signal



Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	384
Packaging Method	Tray

Other

Interface Number	208-15550
------------------	-----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 185879-1
26W MQS COVER ASSY YELLOW

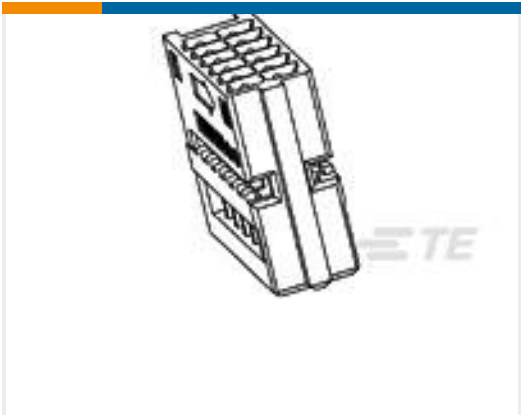

TE Part # 185875-1
26POS MQS REC



TE Part # 185879-2
26W MQS COVER ASSY BLUE




TE Part # 185879-3
26W MQS COVER ASSY RED

Also in the Series | MQS



Automotive Connector Caps & Covers (86)

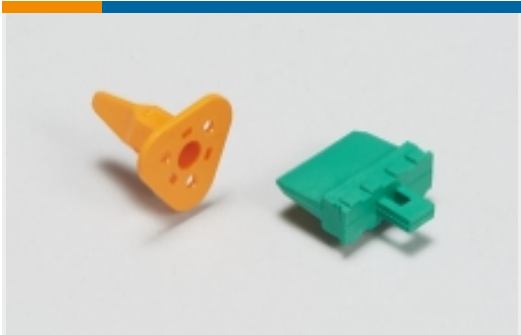

Automotive Connector Locks & Position Assurance(22)



Automotive Housings(298)



Automotive Terminals(78)




Connector Seals & Cavity Plugs(23)



Insertion & Extraction Tools(42)




Other Automotive Connector Accessories(4)

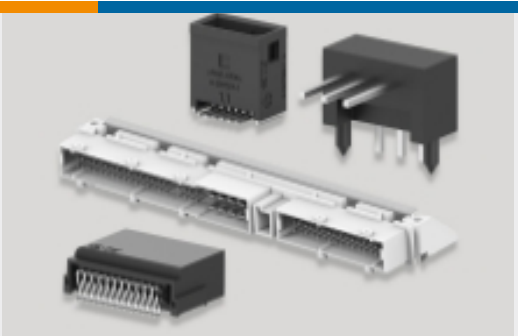

PCB Headers & Receptacles(140)


Customers Also Bought

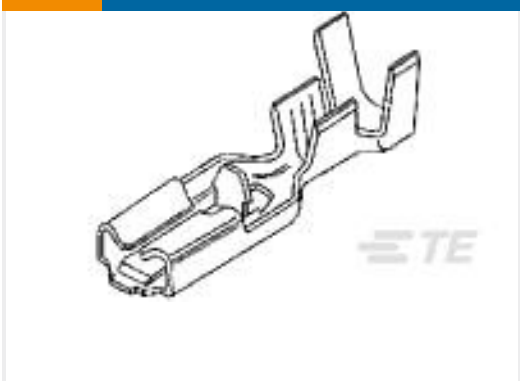

TE Part # 173691-1
PL 187 REC 20-16 AWG 0.3 X 14.0 PTBR



TE Part # DT15-6P
HDR, 6P, GRY, ST, NI/CU

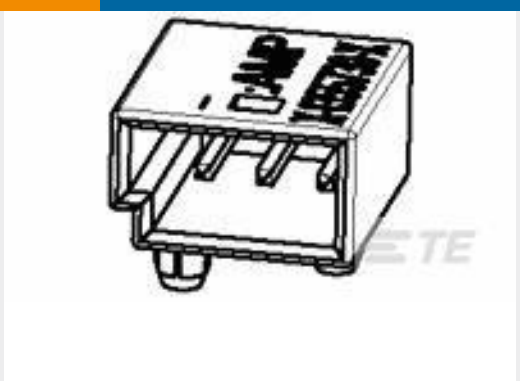

TE Part # 5-1355730-1
3pos MQS .63 header 90deg



TE Part # 2291364-2
4POS,PIN DIA 0.6,HEADER ASSY, CODE B



TE Part # 3-1419158-0
GET .64 CONNECTOR SYSTEM, CONNECTOR HSG




TE Part # 368028-1
STD POWER TIMER REC-W/O LATCH



TE Part # 1703727-1
2POS,JPT,HOUSING,ASSY,BK



TE Part # 1452839-5
24 POS FEMALE HSG ASSY

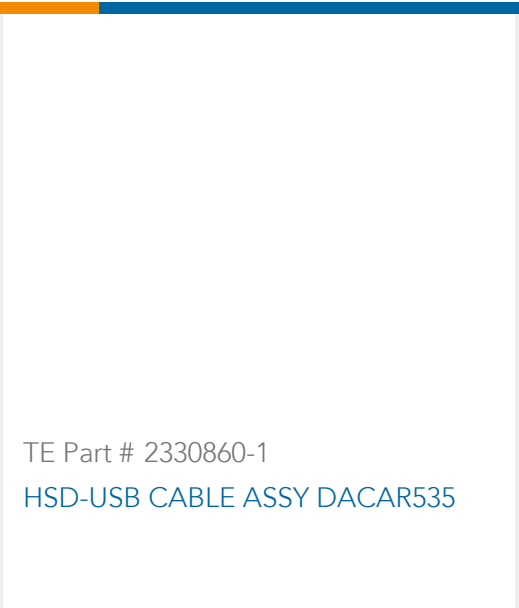

Documents

Product Drawings

26pos MQS .63 header 180deg

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_185226-1_L.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_185226-1_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_185226-1_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

Product Specification

French