




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

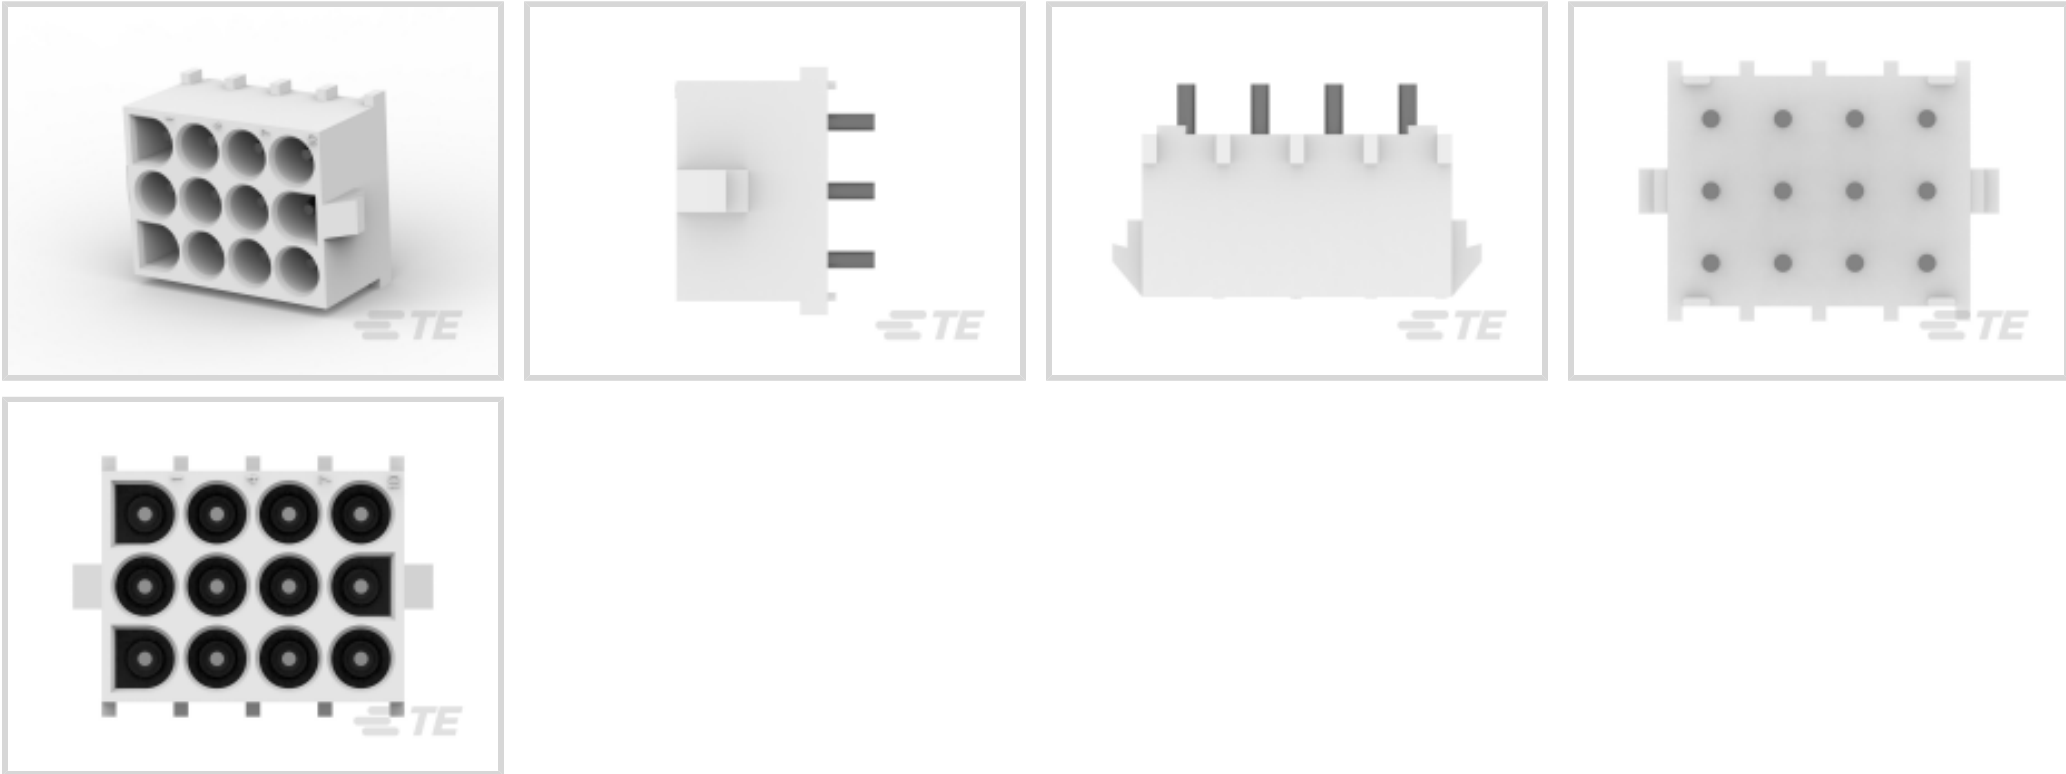

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **12**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	12
PCB Mount Orientation	Vertical
Number of Power Positions	12
Number of Rows	3

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features

Multiple Contact Types	Without
------------------------	---------



PCB Contact Termination Area Plating Material Thickness	2.54 μ m[100 μ in]
Contact Layout	Matrix
Contact Underplating Material Thickness	1.27 μ m[50 μ in]
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	10 A, 12 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Pre-Tin
Contact Mating Area Plating Material Thickness	3.81 - 5.08 μ m[150 - 200 μ in]

Termination Features

Termination Post & Tail Length	3.15 mm[.124 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Positive Lock
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	6.35 mm[.25 in]
Housing Color	Natural
Housing Material	Nylon

Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
Product Width	20.32 mm[.8 in]
Product Length	26.67 mm[1.05 in]
Row-to-Row Spacing	6.35 mm[.25 in]

Usage Conditions

--	--



Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

CSA Rating	Certified, LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	75
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 350735-1 12P UMNL PLUG HSG	 TE Part # 770022-1 12P UMNLI IN-LNE PLUG HSG KIT	 TE Part # 350812-1 STR/REL CLAMP UMNLI	 TE Part # 794279-1 12P UMNLI INTERFACE SEAL
 TE Part # 926681-3 12P UNIV.CAP HSG.	 TE Part # 640717-1 12P UMNLI STR/REL	 TE Part # 1-640723-0 12P UMNLI STR/REL & INSRT NATL	 TE Part # 794280-1 12P UMNLI WIRE SEAL
 TE Part # 1-350590-0 STR/REL CLAMP NATL	 TE Part # 926681-1 UNIV.M-N-L.CAP HSG.	 TE Part # 643428-2 12P UMNLI HDR ASSY POL	 TE Part # 643428-3 12P UMNLI HDR ASSY POL 94VO
 TE Part # 1586854-1 12P UMNLI CAP HSG, GW	 TE Part # 1863006-1 12P UMNLI CAP HSG	 TE Part # 643255-1 12P UMNLI ASSY MOD HSG VO	 TE Part # 794727-1 12P UMNLI CAP HSG NATL,BLACK





TE Part # 2178620-1
UMNL 12 WAY CAP HOUSING



TE Part # 2178621-1
UMNL 12 WAY CAP HOUSING

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Caps & Covers(34)



Connector Contacts(209)



Connector Hardware(12)



Connector Seals & Cavity Plugs(27)



Connector Strain Relief(7)



Insertion & Extraction Tools(4)



Rectangular Connector Housings(1)



Rectangular Power Connectors(671)



Standard Circular Connectors(1)


Customers Also Bought



TE Part # 2-178136-2
DYNAMIC D3200 HDR V ASSY 3P



TE Part # 5569255-1
STK MJ ASSY,8POS,2X2,SHLD,CAT5

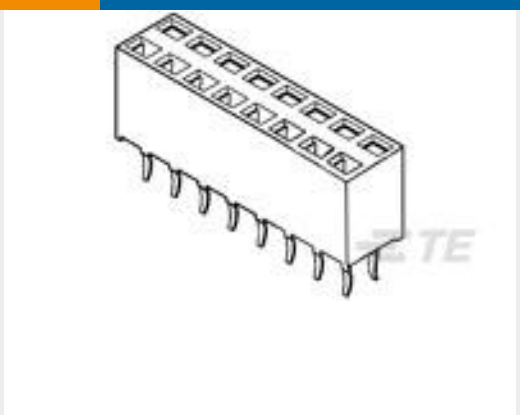

TE Part # 2-215309-5
2X25P HV100 REC CON. TE, 8.5MM



TE Part # 641828-1
08P UMNL PIN HDR ASSY 94VO





TE Part # 2-1625890-3
2W SM M/OX 5% 1K5




TE Part # 1-1879502-6
CRGH2512 5% 56K 2W



TE Part # 2-2176251-9
CRGS2010 5% 220R



TE Part # 640383-4
04P MTA156 HDR ASSY STR SQ SN



TE Part # 5-966443-4
4 POS. MOD II PIN HDR, SGL ROW

Documents

Product Drawings

12P UMNL PIN HDR ASSY 94VO

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_350713-1_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_350713-1_M.3d_igs.zip

English

Customer View Model

ENG_CVM_350713-1_M.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_350713-1_U.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_350713-1_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_350713-1_U.3d_stp.zip

English



By downloading the CAD file I accept and agree to the Terms and Conditions of use.	
Datasheets & Catalog Pages SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY English	
Product Specifications Application Specification English	
Instruction Sheets Instruction Sheet (U.S.) English	