T4110501051-000 🗸 ACTIVE

M12 Connector

TE Internal #: T4110501051-000 Standard Circular Connectors, Cable-to-Cable, 5 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors > M12 Field Installable Unshielded



Connector System: Cable-to-Cable

Connector Mounting Type: Cable Mount (Free-Hanging)

Number of Positions: 5

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

All M12 Field Installable Unshielded (102)



Features

Produc	t Type	Features
--------	--------	----------

Product Type	Connector Assembly
Accessory Color	Black
Assembly Requirement	Factory Assembled
Assembly Type	Electrical Connector
Circular Connector Shell Type	All Plastic
Connector Product Type	Connector Assembly
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Plastic
Configuration Features	
Factory Installed Backshell	No

C For support call +1 800 522 6752

Standard Circular Connectors, Cable-to-Cable, 5 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector



Keying	D	
Number of Positions	5	
Number of Power Positions	0	
Number of Signal Positions	5	
Contacts Preloaded	Yes	
Electrical Characteristics		
Operating Voltage	60 VAC	
Body Features		
Peripheral Seal Material	Silicone	
Environmental Protection	IP67	
O-Ring Material	Silicone	
Environmental Protection Type	Elastomer Sealed	
Shell Plating Material	Unplated	
Shell Base Material	Plastic	
Circular Connector Insulation Material Type	Polyamide 66 GF25	
Hermetically Sealed	Yes	

Contact Features

Contact Current Rating (Max)	4 A		
Reverse Gender	Yes		
Circular Connector Contact Type	Socket		
Mechanical Attachment			
Mating Retention Type	Threaded Coupling		
Mating Alignment	With		
Connector Mounting Type	Cable Mount (Free-Hanging)		
Polarization Code	D		
Mating Alignment Type	Keyed		
Housing Features			
Circular Connector Shell Size	20		
Dimensions			
Wire Size	.7525 mm²		
Usage Conditions			
IP Dust Sealing Level	6		

Standard Circular Connectors, Cable-to-Cable, 5 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector



IP Water Sealing Level	IP67
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Durability Rating	100 Cycles
Circuit Application	Signal
Shielded	No
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	1
Other	
Field Serviceable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions

EU ELV Directive 2000/53/EC

Compliant with Exemptions

	China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
	EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (4% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
	Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
	Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

Standard Circular Connectors, Cable-to-Cable, 5 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector





on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | M12 Connector

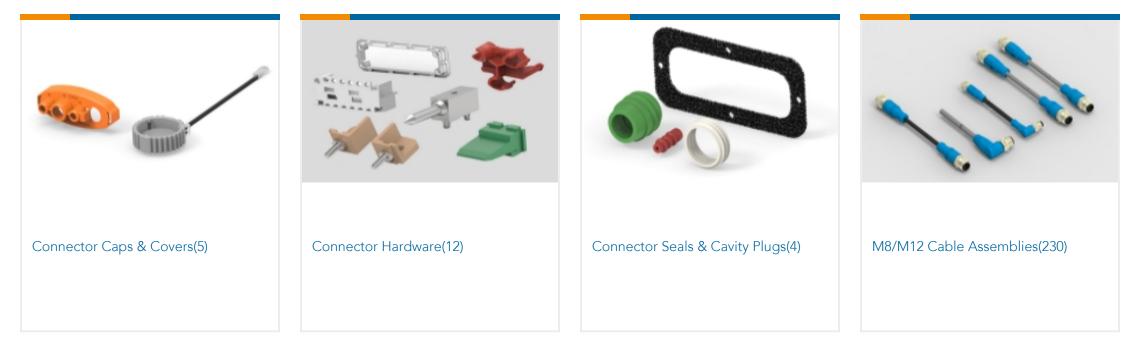



Customers Also Bought

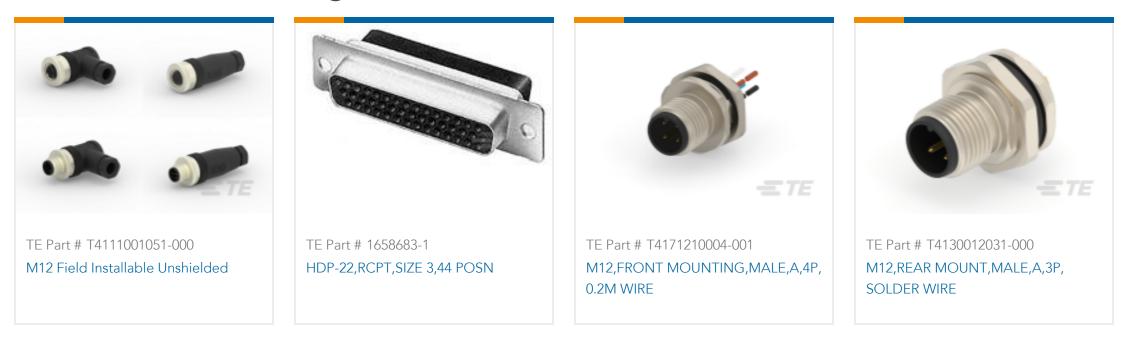

Standard Circular Connectors, Cable-to-Cable, 5 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector





Documents

Product Drawings

M12, FEMALE, STRAIGHT, D CODE, 5P, PG7, GOLD

English

CAD Files

Customer View Model

ENG_CVM_CVM_T4110501051-000_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_T4110501051-000_B.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_T4110501051-000_B.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

Product Specifications

Application Specification

English

Agency Approvals UL

English