

DIAMOND GRIP


TE Internal #: 31096

Closed Ring Tongue Terminal, 22 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated

[View on TE.com >](#)



Terminals & Splices > Ring Terminals

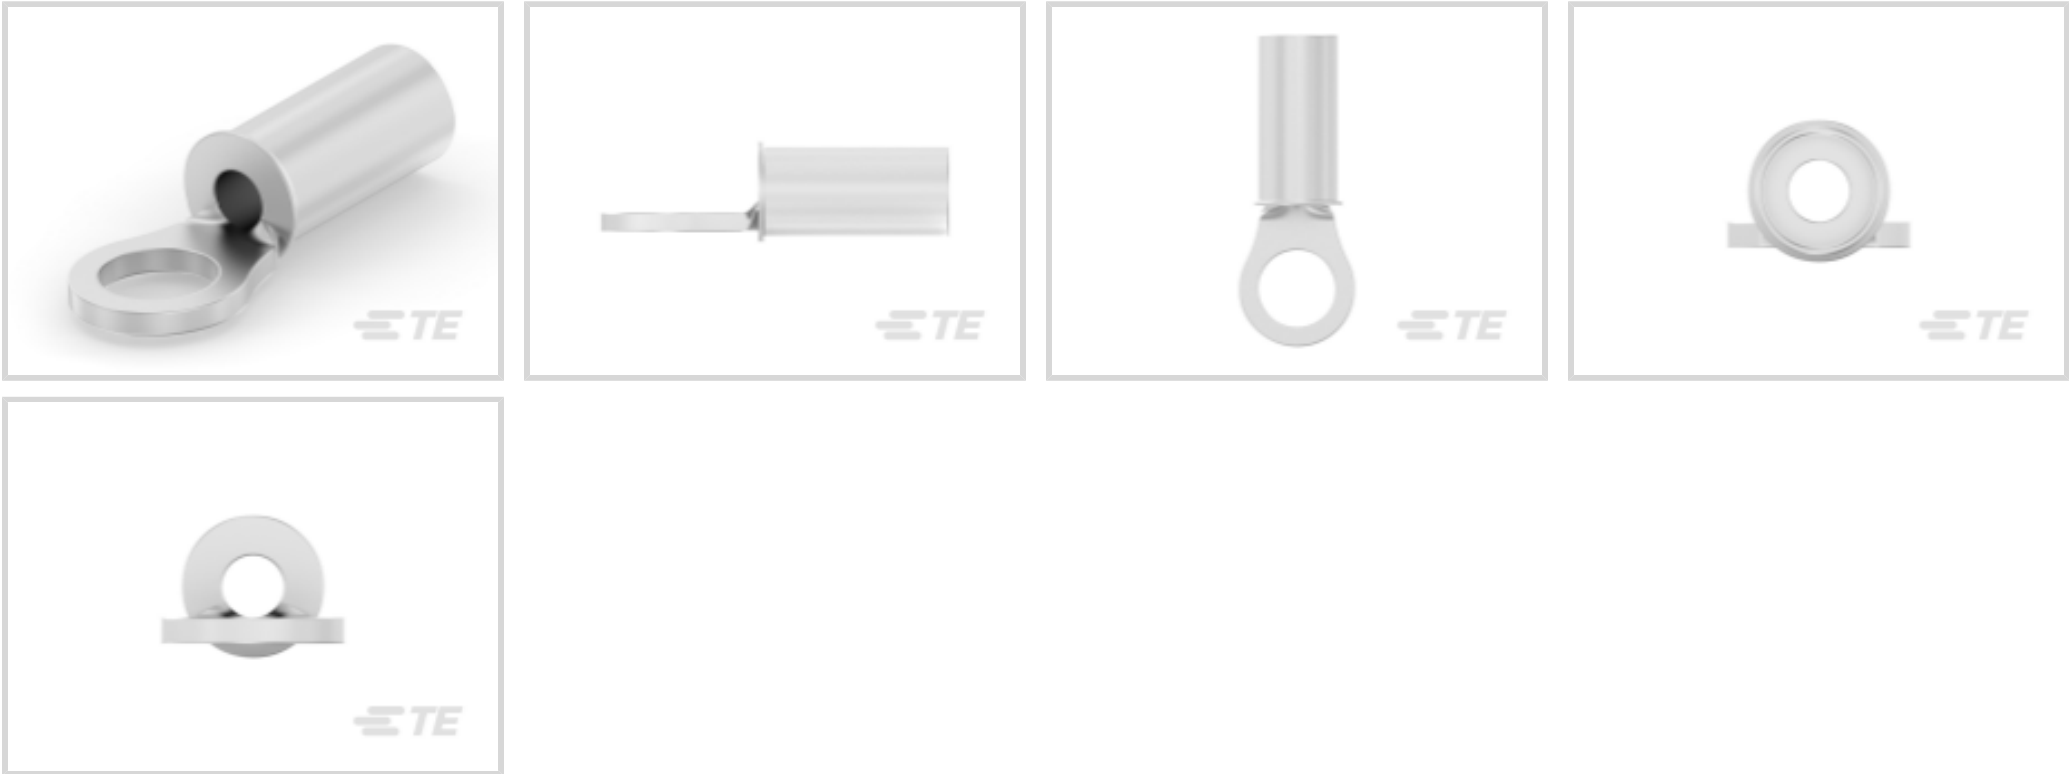

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 509 - 3260 CMA

Stud Size: #6, M3.5

Features

Product Type Features

|                            |                             |
|----------------------------|-----------------------------|
| Ring Terminal Product Type | Closed Ring Tongue Terminal |
| Stud Size                  | #6, M3.5                    |
| Sealable                   | No                          |

|                                        |                    |
|----------------------------------------|--------------------|
| Wire Insulation Support Retention Type | Insulation Support |
|----------------------------------------|--------------------|

Configuration Features

|                 |   |
|-----------------|---|
| Number of Holes | 1 |
|-----------------|---|

Body Features

|                |        |
|----------------|--------|
| Product Weight | .629 g |
|----------------|--------|

Contact Features

|                           |          |
|---------------------------|----------|
| Barrel Type               | Closed   |
| Terminal Orientation      | Straight |
| Terminal Plating Material | Tin      |

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

|                                      |                               |
|--------------------------------------|-------------------------------|
| Wire Size                            | 509 - 3260 CMA                |
| Stud Diameter                        | 3.68 mm[.145 in]              |
| Tongue Thickness                     | .79 mm[.031 in]               |
| Product Length                       | 15.32 mm[.603 in]             |
| Compatible Insulation Diameter (Max) | 3.18 mm[.125 in]              |
| Compatible Insulation Diameter Range | 2.03 - 3.18 mm[.08 - .125 in] |

Usage Conditions

|                             |                |
|-----------------------------|----------------|
| Insulation Option           | Uninsulated    |
| Operating Temperature Range | 170 °C[338 °F] |

Operation/Application

|                                       |        |
|---------------------------------------|--------|
| Compatible With Wire Base Material    | Copper |
| Compatible With Wire Plating Material | Tin    |

Industry Standards

|                               |    |
|-------------------------------|----|
| Government Qualified Terminal | No |
|-------------------------------|----|

Packaging Features

|                    |             |
|--------------------|-------------|
| Packaging Quantity | 1000        |
| Packaging Method   | Loose Piece |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2024 (240)<br>Candidate List Declared Against: JAN 2024 (240)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 49512  
DAHT DIAMOND GRIP 22-16 ASSY

Customers Also Bought

TE Part # 5205817-1  
KIT SCREWLOCK FEMALE

TE Part # 3-640428-3  
03P MTA156 CONN ASSY 22AWG REDTE Part # 2-32949-1  
PG R 22-16 COMM 22-18 MIL 10TE Part # 1-1437653-3  
6PCV-08-006=6PCV ASSEMBLYTE Part # 36467  
SOLIS R 22-16 COMM 22-18 MIL 4TE Part # 8-1437651-2  
6PCR-05-006=6PCR ASSEMBLYTE Part # 8-34113-1  
SOLIS R 22-16COMM 22-18MIL1/4TE Part # 7-1609089-1  
F4381A=10A, 250VAC

Documents

Product Drawings  
DG R 22-16 COMM 22-18 MIL 6  
English

CAD Files  
3D PDF  
3D



Customer View Model

[ENG\\_CVM\\_CVM\\_31096\\_V.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_31096\\_V.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_31096\\_V.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Agency Approvals

[UL Report](#)

English