





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AF	50	F2	REVISED PER ECR-19-013909	01OCT2019	PC	MB	

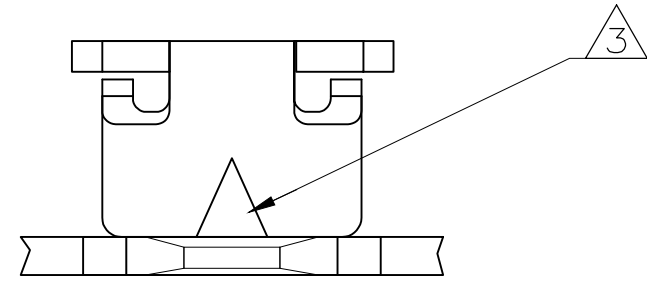

- 5 VARNISH RESIST OVER 0.002032 [.000080] MIN TIN PER MIL-T-10727.
- 6 0.002032 [.000080] MIN TIN PER MIL-T-10727.

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59±0.08 [.220±.003] CENTERS.
- 2 SLOT ACCEPTS 0.45-0.64mm [#25-#22] AWG COPPER MAGNET WIRE. 2 WIRES OF THE SAME SIZE PER SLOT EXCEPT 0.64mm [#22] AWG WHICH IS ONE WIRE ONLY. ALUMINIUM RANGE 0.57-0.72mm[#23-#21] AWG, ALUMINIUM WIRE RANGE APPLIES FOR POST TIN PLATED PART NUMBERS ONLY.
- 3 POKE-IN ACCEPTS A 0.5-0.8mm² [#20-#18] AWG SOLID OR FUSED STRANDED LEAD WIRE.
- 4 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

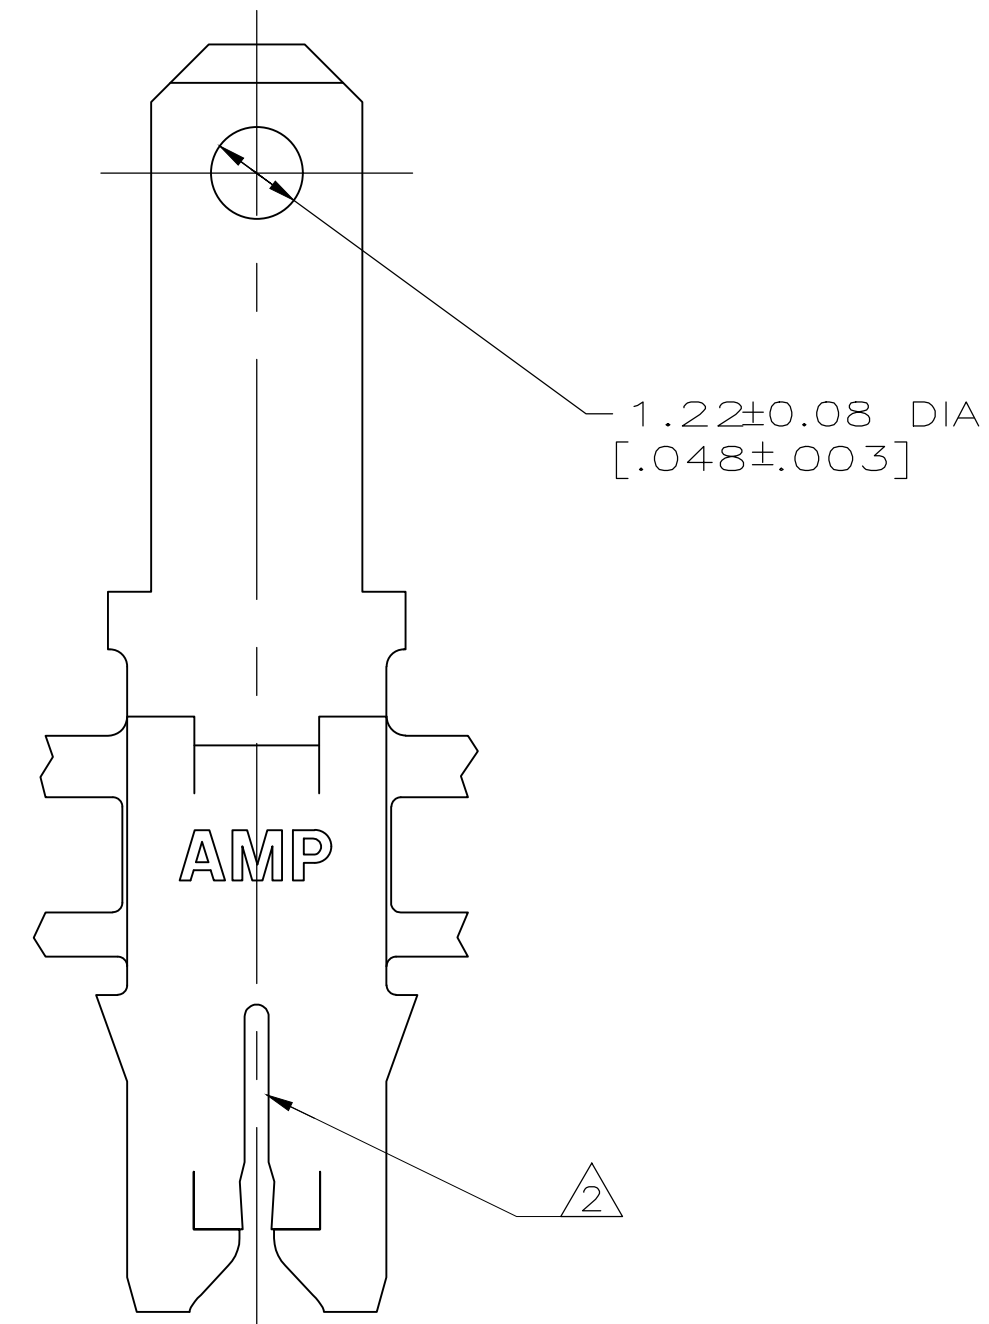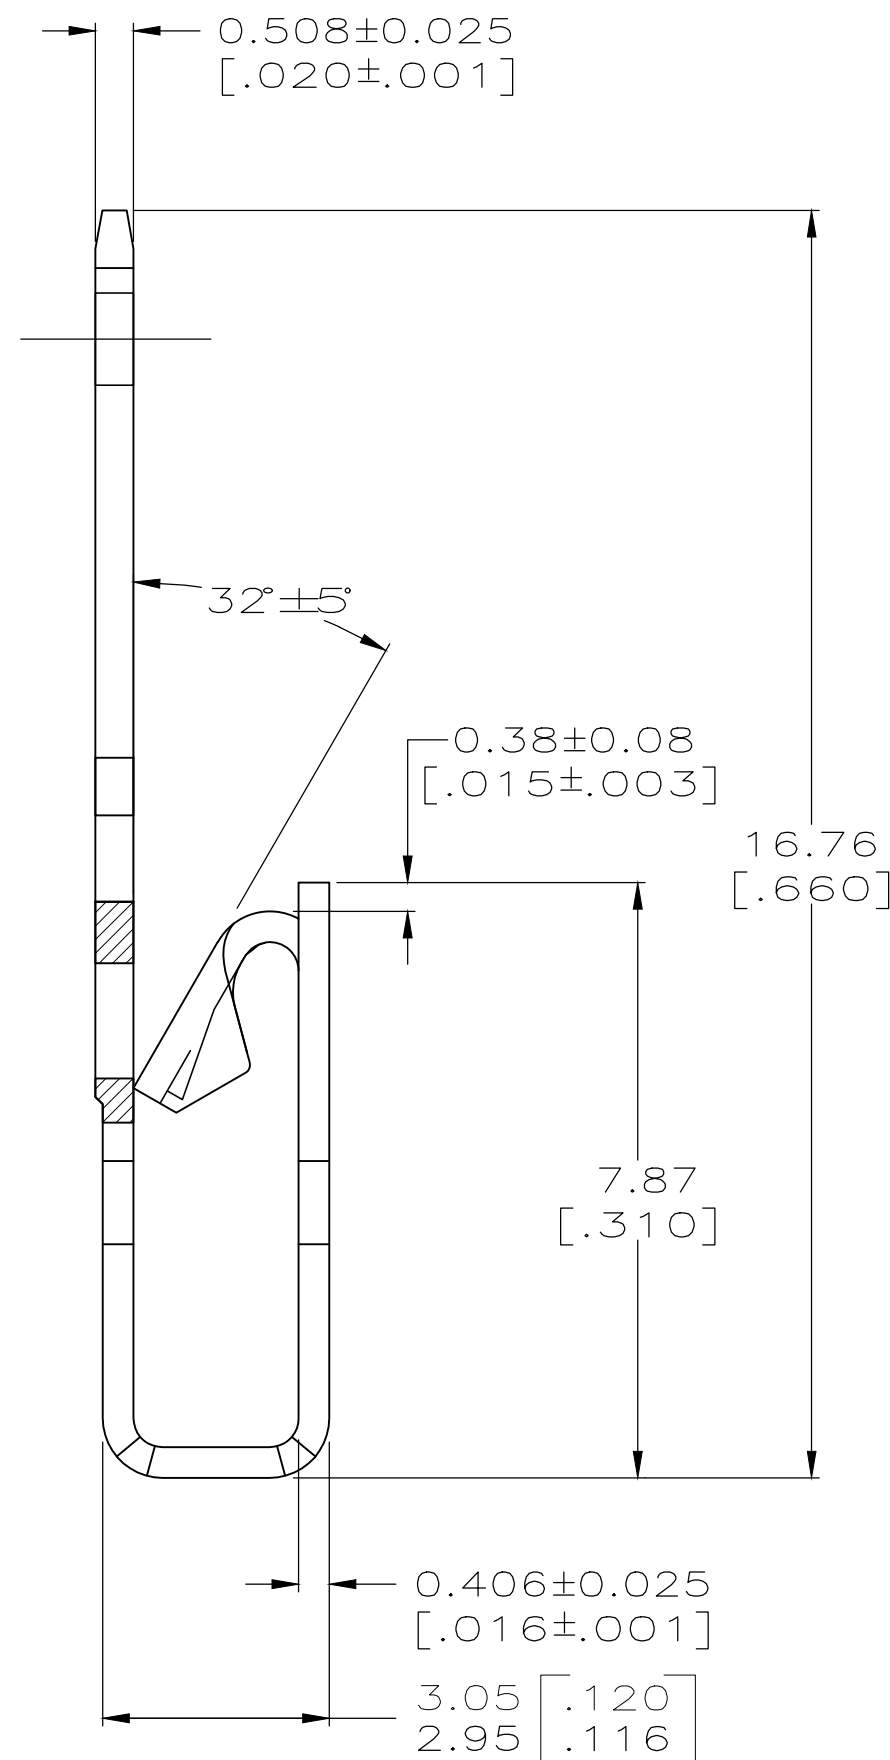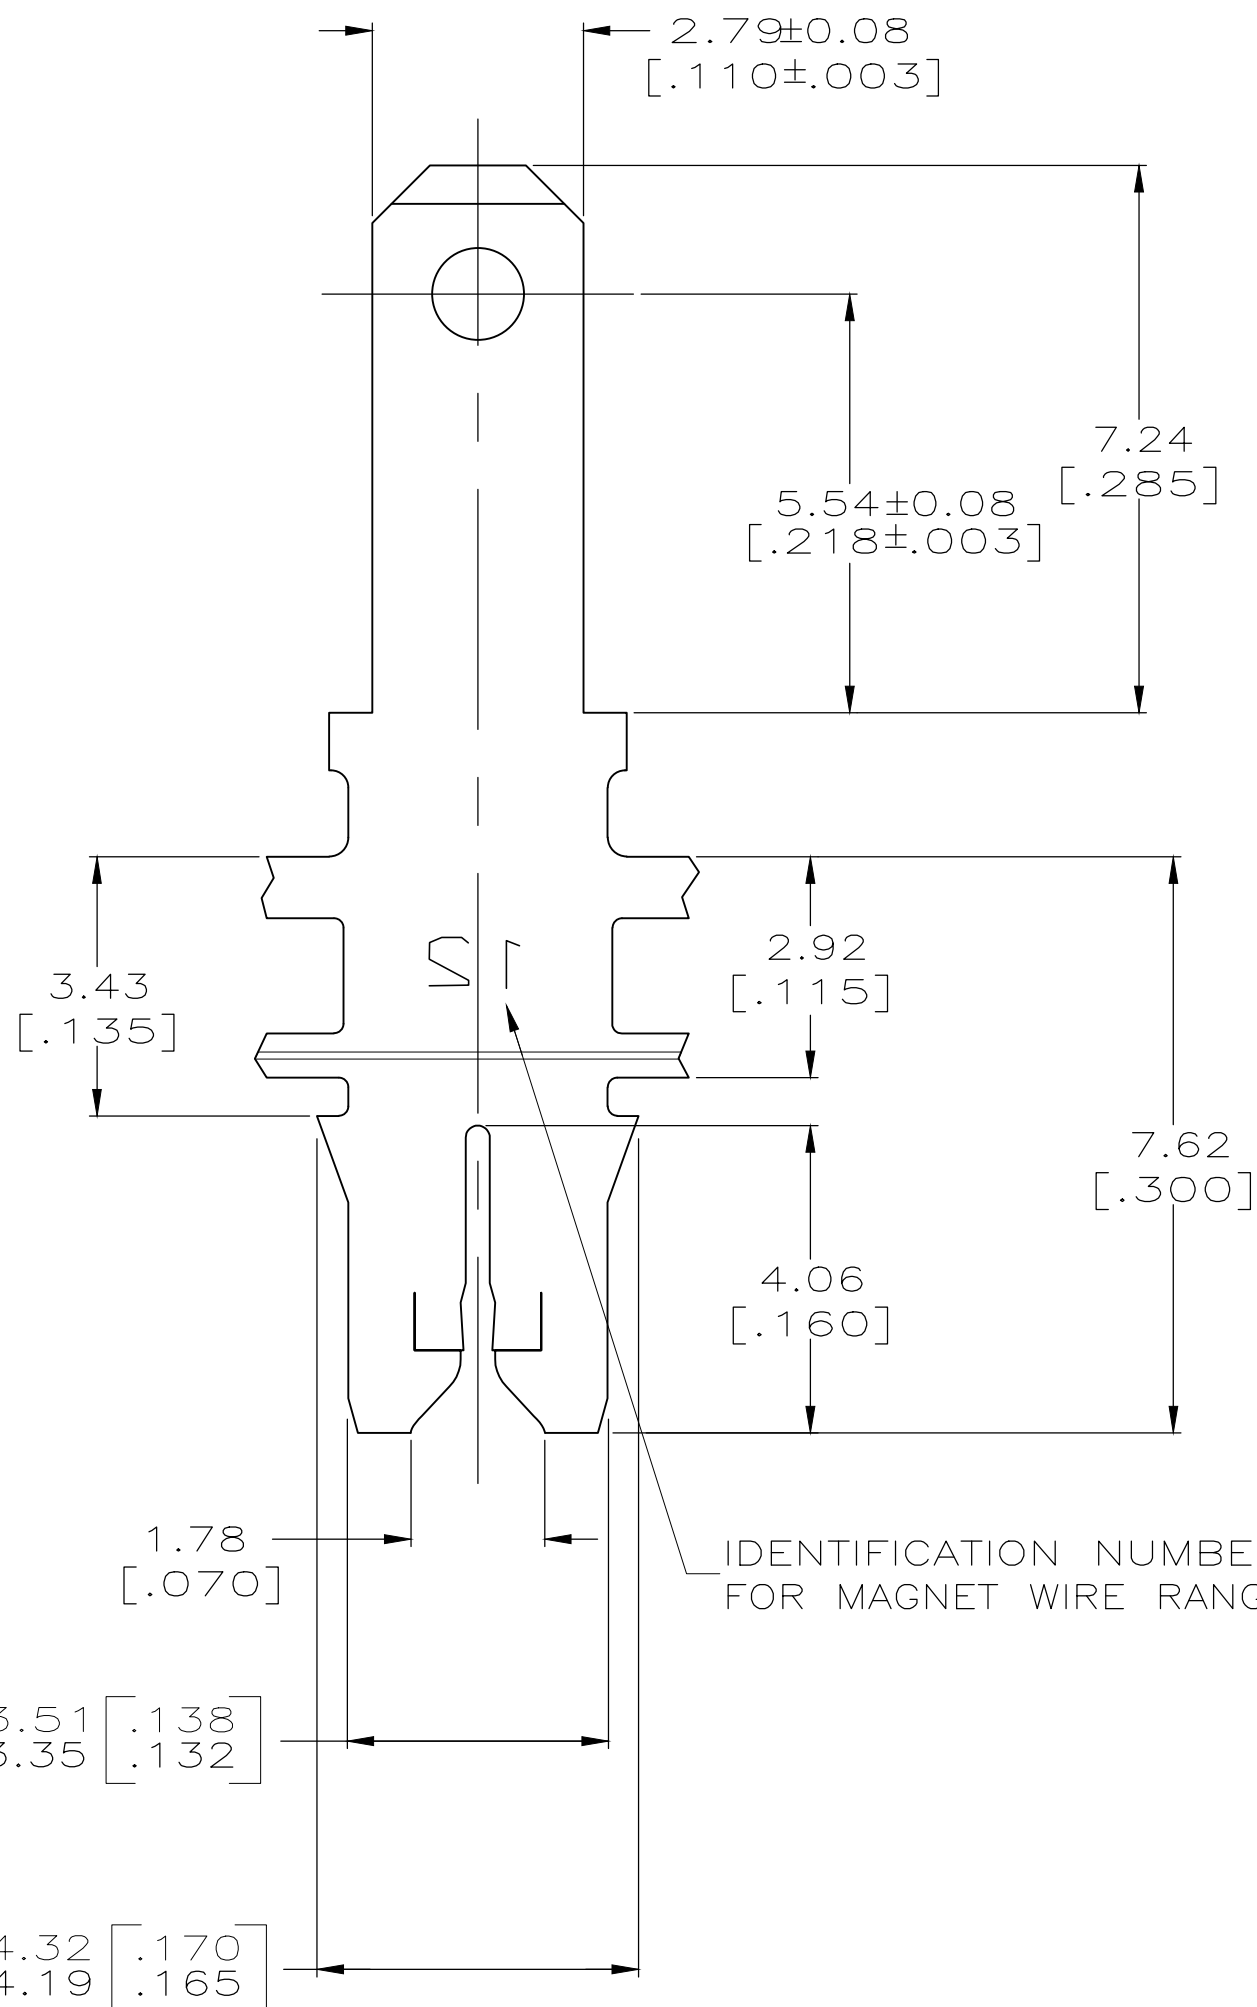

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN MICHAEL S. FEHER 17/DEC/94		
DIMENSIONS: INCHES		CHK JEFF R. RUTH 19/DEC/94		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD NELSON E NEFF 20/DEC/94	NAME TERMINAL, TAB, POKE-IN/2.79 [.110] FASTON,™ COMBINATION, MAG-MATE™	
		PRODUCT SPEC 108-2012	SIZE A2	CAGE CODE 00779
MATERIAL BRASS		APPLICATION SPEC 114-2046	DRAWING NO C-63063	RESTRICTED TO -
FINISH SEE TABLE		WEIGHT -	SCALE 10:1	SHEET 1 OF 1
		CUSTOMER DRAWING	REV F2	