FS2030-000X-0500-G - ACTIVE

MEAS | MEAS FS20

TE Internal #: FS2030-000X-0500-G TE Internal Description: FS2030 500G FORCE SENSOR Compression Load Cell - 0.5-4.5V

View on TE.com >



Sensors > Force Sensors > Force Sensor Elements > Compression Load Cell - 0.5-4.5V



Force Sensor Type: **OEM Compression Load Cells**

Full Scale Range: 500 lbf

Operating Temperature Range: -40 - 85 °C [-40 - 185 °F]

Output Signal Type: .5 - 4.5 V

All Compression Load Cell - 0.5-4.5V (14)

Features

Product Type Features

Force Sensor Type

OEM Compression Load Cells

Electrical Characteristics

Supply Voltage Range	5 VDC
Full Scale Range	500 lbf
Usage Conditions	
Accuracy	±1 % of FS
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Output Signal Type	.5 - 4.5 V
Other	
Zero Shift in CTR	±.05 % of FS
Sensitivity Shift	±.05 % of FS
Force Direction	Compression

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant with Exemptions

FS2030-000X-0500-G

FS2030 500G FORCE SENSOR



EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Decamethylcyclopentasiloxane (D5) (.12% in Adhesive) Dodecamethylcyclohexasiloxane (D6) (.26% in Adhesive) 2-methyl-1-(4-methylthiophenyl)-2- morpholinopropan-1-one (.15% in Solder Mask) Aticle Safe Usage Statements Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability
Product Compliance Disclaimer	

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts




Also in the Series | MEAS FS20

C For support call +1 800 522 6752


05/27/2024 03:09AM |Page 2

FS2030 500G FORCE SENSOR



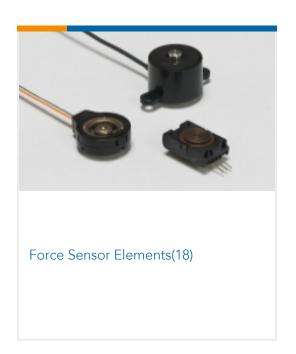

Customers Also Bought

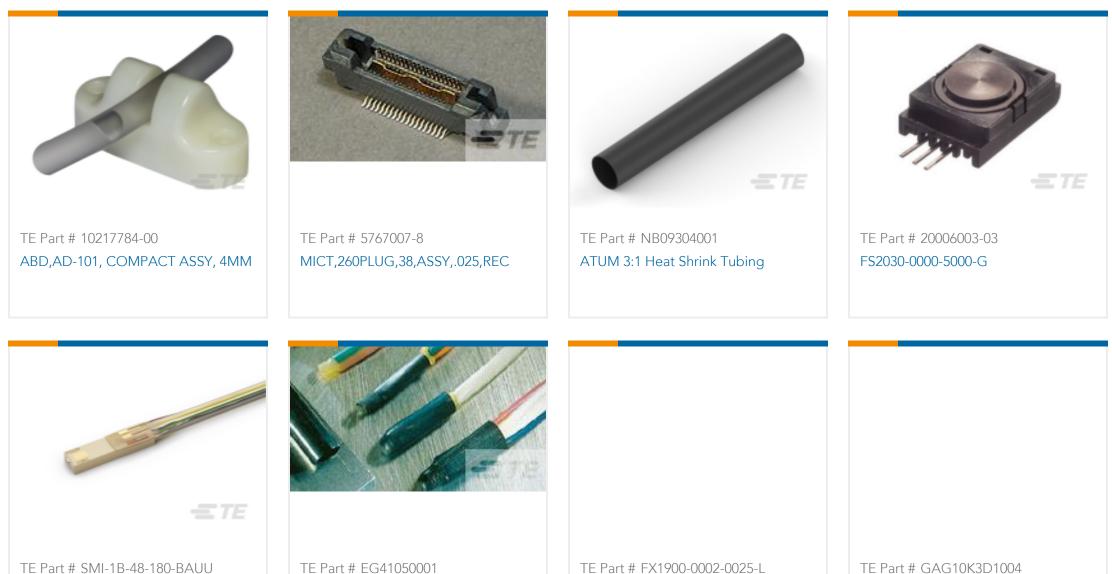

IntraSense 3-wires 180cm, light shield	ES-CAP-NO.2-B9-0-35MM	COIN LOADCELL WITH 100MM CABLE	GLS2-PROBE 10K+/-0.1'C AT 25'C
TE Part # SM3041-015-D-C-3-S MEDIUM PRESSURE I2C DIGITAL			
Documents			
CAD Files			
3D PDF 3D			
Customer View Model			

ENG_CVM_CVM_FS2030-000X-0500-G_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_FS2030-000X-0500-G_F.3d_igs.zip



English

Customer View Model ENG_CVM_CVM_FS2030-000X-0500-G_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages

FS20

English