ROX05SJ24R 🗸 ACTIVE

Neohm | Neohm ROX

TE Internal #: 3-1676123-6 General Purpose Resistor, Metal Oxide Film, .5 W, 24 Ω, 5 %, ±350 ppm/°C, Axial-Leaded, Copper Termination, 7.2 x 2.5 mm, Ammo Packed, Neohm ROX

View on TE.com >

Passive Components > Resistors > Through-Hole Resistors



Resistor Type: General Purpose Resistor

Element Type: Metal Oxide Film

Power Rating: .5 W

Resistance Class: Up to $1k\Omega$

Resistance Value: 24 Ω

Features

E T E connectivity

Product Type Features

Resistor Type	General Purpose Resistor
Element Type	Metal Oxide Film
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Operating Voltage	250 V
Power Rating	.5 W
Resistance Class	Up to 1kΩ
Resistance Value	24 Ω
Passive Component Tolerance	5 %
Body Features	
Lead Type	Axial-Leaded
Termination Features	

C For support call +1 800 522 6752

ROX05SJ24R

General Purpose Resistor, Metal Oxide Film, .5 W, 24 Ω, 5 %, ±350 ppm/°C, Axial-Leaded, Copper Termination, 7.2 x 2.5 mm, Ammo Packed, Neohm ROX



Termination Area Base Material	Copper
Number of Terminations	2
Dimensions	
Passive Component Dimensions	7.2 x 2.5 mm
Usage Conditions	
Operating Temperature Range	-55 - 155 °C
Temperature Coefficient	±350 ppm/°C
Packaging Features	
Packaging Method	Ammo Packed
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE

2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Wave solder capable to 265°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

ROX05SJ24R

General Purpose Resistor, Metal Oxide Film, .5 W, 24 Ω , 5 %, ±350 ppm/°C, Axial-Leaded, Copper Termination, 7.2 x 2.5 mm, Ammo Packed, Neohm ROX








Also in the Series | Neohm ROX



Customers Also Bought

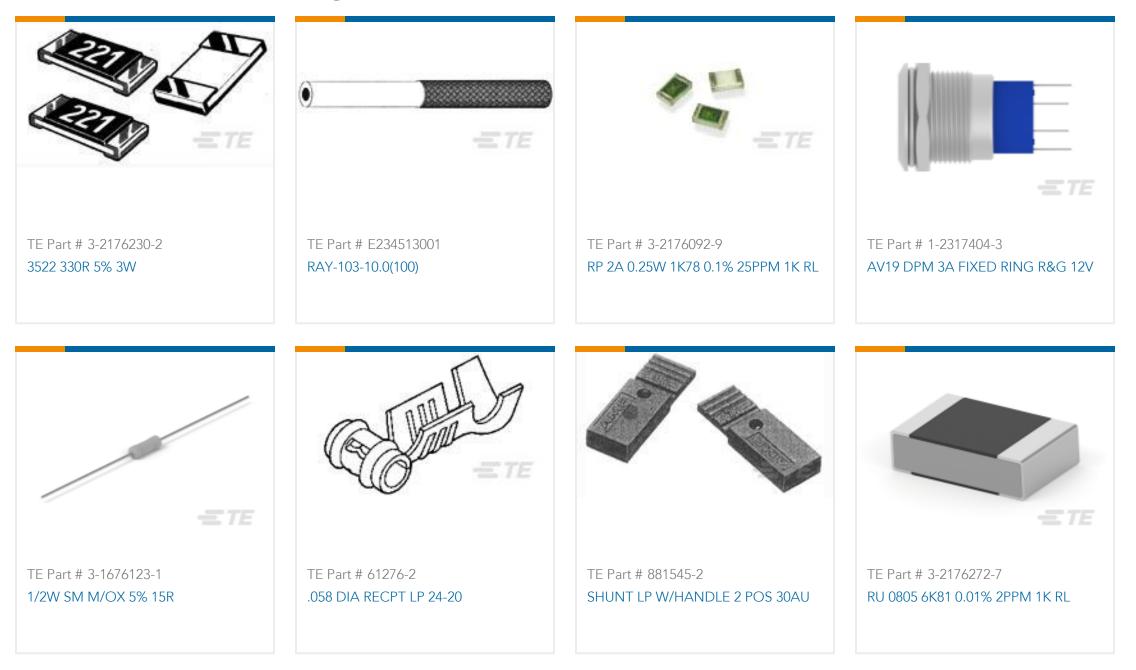

ROX05SJ24R

General Purpose Resistor, Metal Oxide Film, .5 W, 24 Ω, 5 %, ±350 ppm/°C, Axial-Leaded, Copper Termination, 7.2 x 2.5 mm, Ammo Packed, Neohm ROX



Documents

Product Drawings 1/2W SM M/OX 5% 24R

English

Datasheets & Catalog Pages Flame Proof Power Metal Oxide Film Resistors - Type ROX Series - Tyco Electronics Passives

English