
LA92-M12:63-ZF

Ruland Adjustable Clamping Lever, Lever Length 92mm, Stud Thread M12, Stud Length 63mm, Zinc Lever, Steel Inserts



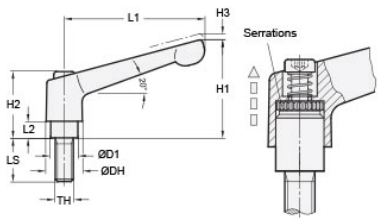

Description

Ruland LA92-M12:63-ZF is an adjustable clamping handle with a 92mm handle, M12 threaded stud, 63mm stud length, 19mm insert diameter, and 65mm overall height. The steel inserts combined with a zinc die-cast handle allow for use in heavy duty industrial applications. LA92-M12:63-ZF has a textured finish on the handle making it easy for the user to grip in manufacturing environments with oil, coolant, or other lubricants. It is commonly found in packaging, printing, food processing, and manufacturing systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A M12 threaded stud can replace existing hardware in an application or mate to an equivalently sized tapped hole for a quick installation. LA92-M12:63-ZF is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by Otto Ganter, stocked by Ruland, and RoHS3 and REACH compliant.

Product Specifications

Thread (TH)	M12	**Stud Length LS**	63 mm
Lever Length L1	92 mm	**Overall Height H1**	65 mm
Hub Height H2	43 mm	**Hub Diameter DH**	24 mm
Handle Disengagement Travel H3	4 mm	**Thread Pitch**	1.75 mm
Sleeve Length L2	11 mm	**Sleeve Diameter D1**	19 mm
Handle Material	Zinc	**Handle Color**	Black
Insert and Screw Material	Steel	**Insert and Screw Finish**	Blackened
Weight (lbs)	0.516800	**Manufacturer**	JW Winco/ Otto Ganter
UPC	634529236710	**Country of Origin**	Germany
Tariff Code	8487.90.0080	**UNSPC**	31162807
Note 1	Performance ratings are for guidance only. The user must determine suitability for a particular application.		
Prop 65	⚠**WARNING** This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.		