
TSP-10-18-F-LH

Ruland TSP-10-18-F-LH, 5/8" - 18 TPI Left Hand Threaded Shaft Collar, Black Oxide Steel, Two-Piece Clamp Style, 1 5/16" OD, 0.437" Width



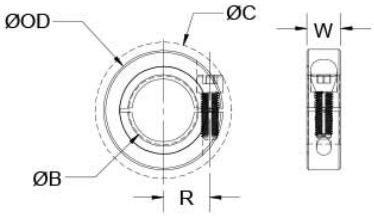

Description

Ruland TSP-10-18-F-LH is a left hand threaded two-piece shaft collar with a 5/8" - 18 TPI bore, 1 5/16" OD, and 0.437" width. It has higher axial holding power than round bore shaft collars of similar size. Ruland double taps threads to ensure a precise and burr-free finish allowing for easy installation and removal, proper fit, and extended shaft life. The clamp style design will not mar the shaft. TSP-10-18-F-LH is commonly used for guiding, spacing, stopping, mounting, and component alignment. Equipment manufacturers benefit from the tightly controlled face to bore perpendicularity (TIR of ? .002"). Perpendicularity is critical for alignment when the shaft collar is used as a load bearing face, mechanical stop, or for mounting components such as gears or bearings. Proprietary processes have been developed by Ruland to maintain superior fit, finish, and holding power. TSP-10-18-F-LH is stamped with the Ruland name and bore size for ease of identification. Forged screws test beyond ANSI standards to ensure maximum holding power. Halves are mated throughout the manufacturing process for proper fit and alignment. It is manufactured from solid bar stock sourced from select North American mills and machined to a fine burr free finish. Ruland uses 1215 lead-free steel with a proprietary black oxide finish that produces a fine glossy finish while increasing holding power and resisting corrosion. TSP-10-18-F-LH is RoHS3 and REACH compliant and manufactured in our Marlborough, MA factory under strict controls using proprietary processes.

Product Specifications

Threaded Bore (B1)	5/8 in - 18 TPI	**Thread Class**	3B
Outer Diameter (OD)	1 5/16 in	**Width (W)**	0.437 in
Clearance Diameter (C) MAX	1.472 in	**Width Tolerance**	+0.003 in / -0.010 in
Recommended Gap	0.063 in	**Recommended Shaft Tolerance**	+0.0000 in / -0.0005 in
Forged Clamp Screw	#10-32	**Screw Material**	Alloy Steel
Hex Wrench Size	5/32 in	**Screw Finish**	Black Oxide
Seating Torque	76 lb-in	**Screw Location (R)**	0.479 in
Number of Screws	2 ea	**Material Specification**	1215 Carbon Steel Bar
Temperature	-40°F to 350°F (-40°C to 176°C)	**Finish Specification**	Hot Process Black Oxide, Impregnated with Naphthenic Oil, Centrifugally Dried
Manufacturer	Ruland Manufacturing	**Country of Origin**	USA
Weight (lbs)	0.117900	**UPC**	634529029183
Tariff Code	8483.60.8000	**UNSPC**	31162811
Note 1	Performance ratings are for guidance only. The user must determine suitability for a particular application.		
Prop 65	⚠**WARNING** This product can expose you to the chemical Ethylene Thiourea, known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.		

Installation Instructions

1. Use the TSP-10-18-F-LH left threaded shaft collar as it is received.
2. Wipe the bore clean.
3. Apply a thin coat of light oil to the shaft.
4. Place the collar onto the desired shaft location and tighten it using a 5/32 in hex wrench until a slight resistance is felt.
5. Be sure to maintain the gap of 0.063 inbetween the two halves of the collar during installation.
6. Wring collar into its final position and tighten the screw to the full recommended seating torque of 76 lb-in using a 5/32 in torque wrench.