
OH-SP-16-A

Ruland OH-SP-16-A, 1" Shaft Collar With OD Holes, 2024 Aluminum, Two-Piece Clamp Style, 1 3/4" OD, 0.500" Width



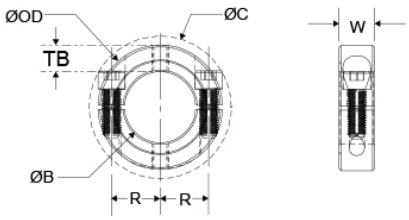

*Additional hardware NOT included

Description

Ruland OH-SP-16-A is a two-piece shaft collar with a 1.0000" bore, 1 3/4" OD, and 0.500" width. It has OD flats and tapped holes for mounting shaft collars to each other or adjacent components. The clamp style design does not mar the shaft, is easy to remove, and is indefinitely adjustable. OH-SP-16-A is commonly used for guiding, spacing, stopping, mounting, and component alignment. Equipment manufacturers benefit from the tightly controlled face to bore perpendicularity (TIR of ? .002"). Perpendicularity is critical for alignment when the shaft collar is used as a load bearing face, mechanical stop, or for mounting components such as gears or bearings. Proprietary processes have been developed by Ruland to maintain superior fit, finish, and holding power. OH-SP-16-A is stamped with the Ruland name and bore size for ease of identification. Halves are mated throughout the manufacturing process for proper fit and alignment. Forged screws test beyond ANSI standards to ensure maximum holding power. OH-SP-16-A is manufactured from solid bar stock sourced from select North American mills and machined to a fine burr free finish. Ruland uses high grade 2024 aluminum for increased screw seating torque. OH-SP-16-A is RoHS3 and REACH compliant and manufactured in our Marlborough, MA factory under strict controls using proprietary processes.

Product Specifications

Bore (B1)	1.0000 in	**Bore Tolerance**	+0.0020 in / +0.0005 in
Outer Diameter (OD)	1 3/4 in	**Clearance Diameter (C) MAX**	2.032 in
Width (W)	0.500 in	**Width Tolerance**	+0.003 in / -0.010 in
Threaded Mounting Hole	1/4-28	**Through to Bore TB**	0.37 in
Recommended Gap	0.063 in	**Recommended Shaft Tolerance**	+0.0000 in / -0.0005 in
Forged Clamp Screw	1/4-28	**Screw Material**	Alloy Steel
Hex Wrench Size	3/16 in	**Screw Finish**	Black Oxide
Seating Torque	170 lb-in	**Screw Location (R)**	0.678 in
Number of Screws	2 ea	**Material Specification**	2024-T351 Aluminum Bar
Temperature	-40°F to 225°F (-40°C to 107°C)	**Finish Specification**	Bright, No Plating
Manufacturer	Ruland Manufacturing	**Country of Origin**	USA
Weight (lbs)	0.088400	**UPC**	634529220634
Tariff Code	8483.60.8000	**UNSPC**	31162811
Note 1	This product has been discontinued as a standard item. Please inquire for special pricing.		
Prop 65	⚠**WARNING** This product can expose you to the chemical Ethylene Thiourea, known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.		

Installation Instructions

1. Use the OH-SP-16-A two-piece shaft collar as it is received.
2. Wipe the bore clean.
3. Apply a thin coat of light oil to the shaft.
4. Place the collar onto the desired shaft location and tighten it using a 3/16 in hex wrench until a slight resistance is felt.
5. Be sure to maintain the gap of 0.063 inbetween the two halves of the collar during installation.
6. Wring collar into its final position and tighten the screw to the full recommended seating torque of 170 lb-in using a 3/16 in torque wrench.