
LA63-5/16X18-PF

Ruland Adjustable Clamping Lever, Lever Length 63mm, Tapped Hole 5/16X18, Plastic Lever, Steel Inserts



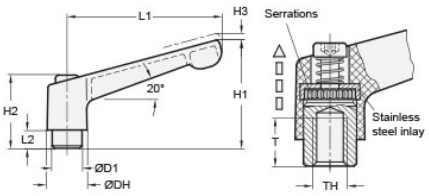

Description

Ruland LA63-5/16X18-PF is an adjustable clamping handle with a 63mm handle, 5/16X18 tapped hole, 13.5mm insert diameter, and 45mm overall height. The handle is plastic and the inserts are steel with a black oxide finish for reduced weight and easier adjustment of the handle in light duty applications. LA63-5/16X18-PF is commonly found in packaging, printing, food processing, and medical systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A 5/16X18 tapped hole is designed to mate with an equivalently sized threaded stud or rod for a quick installation. LA63-5/16X18-PF is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by JW Winco, stocked by Ruland, and RoHS3 and REACH compliant.

Product Specifications

Thread (TH)	5/16 in - 18 TPI	**Lever Length L1**	63 mm
Overall Height H1	45 mm	**Hub Height H2**	31 mm
Hub Diameter DH	19.4 mm	**Handle Disengagement Travel H3**	4 mm
Thread Depth T	11 mm	**Sleeve Length L2**	6.5 mm
Sleeve Diameter D1	13.5 mm	**Handle Material**	Plastic
Handle Color	Black	**Insert and Screw Material**	Steel
Weight (lbs)	0.064800	**Manufacturer**	JW Winco/ Otto Ganter
UPC	634529237250	**Country of Origin**	USA
Tariff Code	3926.90.2500	**UNSPC**	31162807
Prop 65	⚠**WARNING** This product can expose you to the chemicals Nickel (metallic) and Lead, known to the State of California to cause cancer and reproductive harm. For more information go to www.P65Warnings.ca.gov.		