
LA30-M6:20-ZS

Ruland Adjustable Clamping Lever, Lever Length 30mm, Stud Thread M6, Stud Length 20mm, Zinc Lever, Stainless Steel Inserts



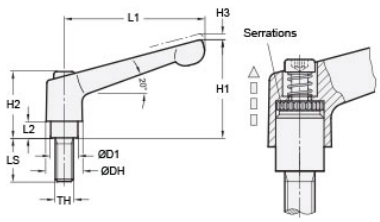

Description

Ruland LA30-M6:20-ZS is an adjustable clamping handle with a 30mm handle, M6 threaded stud, 20mm stud length, 10mm insert diameter, and 31mm overall height. The stainless steel inserts combined with a zinc die-cast handle allow for use in corrisve applications where durability is required. LA30-M6:20-ZS has a textured finish on the handle making it easy for the user to grip in environments with water, coolant, chemicals, or other liquids. It is commonly found in packaging, printing, food processing, and manufacturing systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A M6 threaded stud can replace existing hardware in an application or mate to an equivalently sized tapped hole for a quick installation. LA30-M6:20-ZS is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by Otto Ganter, stocked by Ruland, and RoHS3 and REACH compliant.

Product Specifications

Thread (TH)	M6	**Stud Length LS**	20 mm
Lever Length L1	30 mm	**Overall Height H1**	31 mm
Hub Height H2	24.5 mm	**Hub Diameter DH**	13 mm
Handle Disengagement Travel H3	3.5 mm	**Thread Pitch**	1 mm
Sleeve Length L2	4 mm	**Sleeve Diameter D1**	10 mm
Handle Material	Zinc	**Handle Color**	Black
Insert and Screw Material	303 Stainless Steel	**Weight (lbs)**	0.070800
Manufacturer	JW Winco/ Otto Ganter	**UPC**	634529237069
Country of Origin	Germany	**Tariff Code**	8487.90.0080
UNSPC	31162807		
Note 1	Performance ratings are for guidance only. The user must determine suitability for a particular application.		
Prop 65	⚠**WARNING** This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.		